





GENERAL DESCRIPTION

Application: The Ken-Rad 6F8G is a cathode type twin triode designed for use as a voltage amplifier. Electrical characteristics of the individual sections of this tube are identical to those of type 6J5G. The 6F8G is a glass tube equipped with an octal base.

Physical Characteristics:



Bottom View

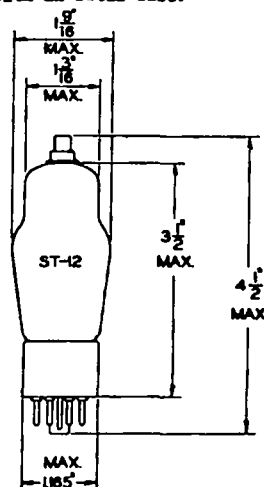

RATING AND CHARACTERISTICS

Heater:

Voltage 6.3 Volts A.C. or D.C.
Current .6 Ampere

Note: Voltage between heater and cathode should be kept at a minimum if direct connection is not possible.

CLASS A AMPLIFIER - ONE TRIODE SECTION

Plate Voltage	250	Volts Max.
Grid Voltage	-8	Volts
Plate Current	9.0	Milliamperes
Plate Resistance	7700	Ohms Approx.
Amplification Factor	80	
Mutual Conductance	2600	Micromhos Approx.


Direct Interelectrode Capacitances:

C _G -P	4.2°	4.5°	μmf.
C _G -K	5.0°	5.5°	μmf.
C _P -K	2.0°	1.5°	μmf.
C _G -G		.15	μmf.
C _P -P		1.2	μmf.
C _G -P		.2*	μmf.

°Values for triode having its grid brought out to the top cap.

°°Values for triode having its grid brought out to a base pin.


*Measured from top-cap grid to plate of other triode.

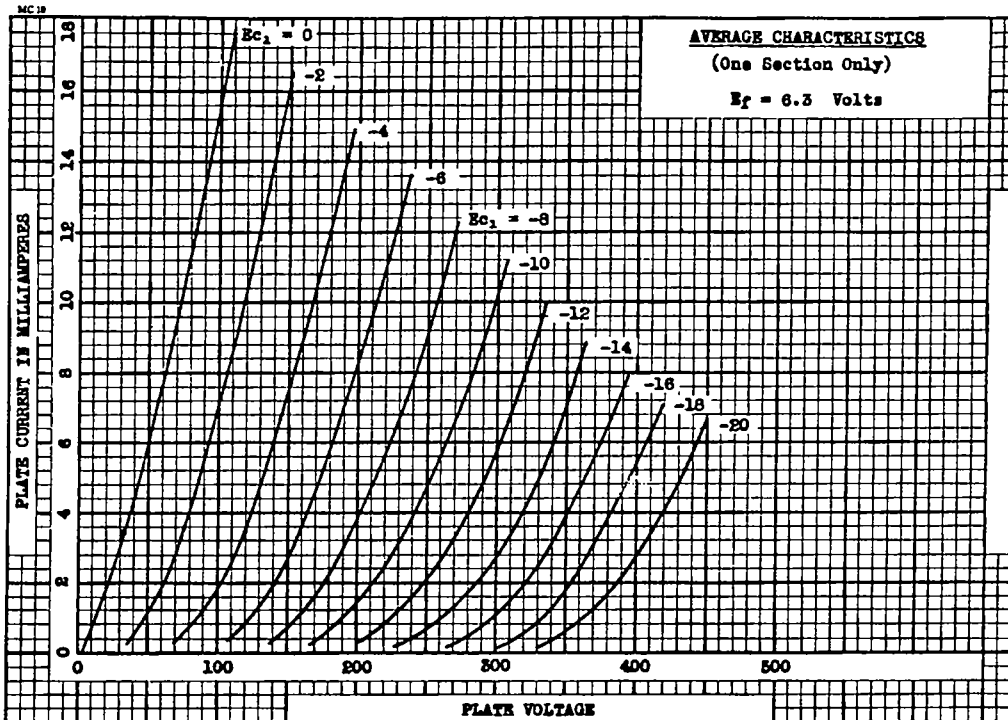

COMMERCIAL ENGINEERING DEPARTMENT

KEN-RAD TUBE & LAMP CORPORATION
OWENSBORO, KENTUCKY

DATE 9-24-37

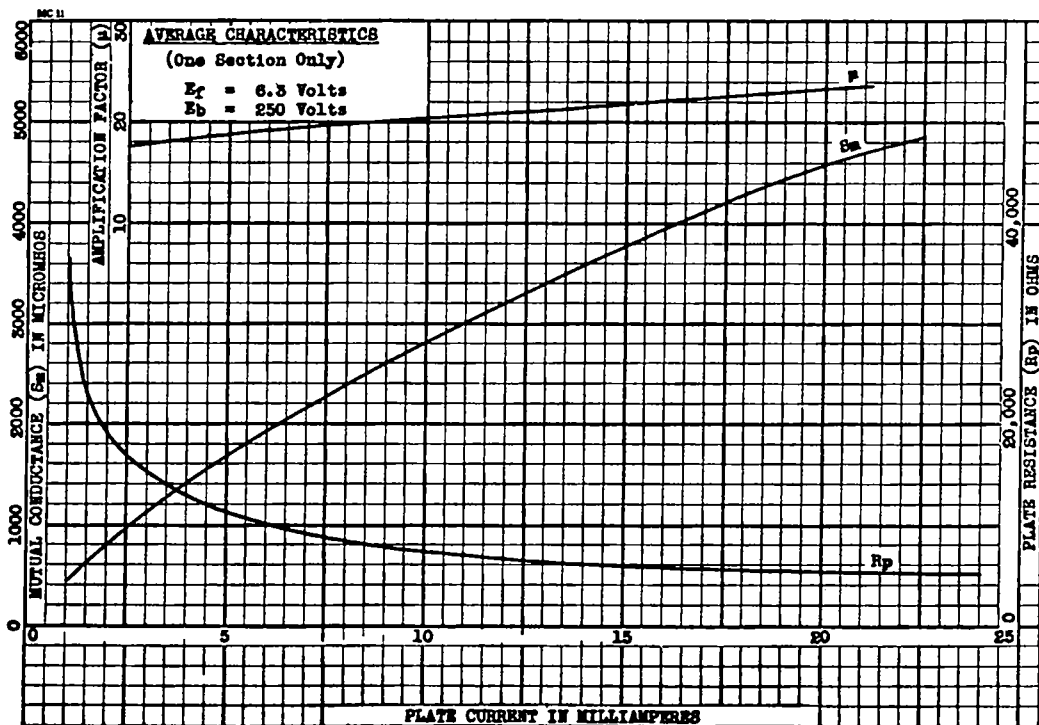

COMMERCIAL ENGINEERING DEPARTMENT

KEN-RAD TUBE & LAMP CORPORATION
OWENSBORO, KENTUCKY

DATE 9-24-37

Issue of 9-24-37