

6SA7
6SA7-GT/G

6SA7, 6SA7-GT/G

PENTAGRID CONVERTER

Heater [■]	Coated Unipotential Cathode	
Voltage	6.3	a-c or d-c volts
Current	0.3	amp.

Direct Interelectrode Capacitances:	6SA7	6SA7-GT/G	
Grid #3 to All Other Electrodes (R-F Input)	9.5 [▲]	11 ^{▲▲}	μf
Plate to All Other Electrodes (Mixer Output)	12 [▲]	11 ^{▲▲}	μf
Grid #1 to All Other Electrodes (Osc. Input)	7 [▲]	8 ^{▲▲}	μf
Grid #3 to Plate	0.13 max. [▲]	0.5 max. ^{▲▲}	μf
Grid #3 to Grid #1	0.15 max. [▲]	0.4 max. ^{▲▲}	μf
Grid #1 to Plate	0.06 max. [▲]	0.2 max. ^{▲▲}	μf
Grid #1 to Shell, Grid #5, and All Other Electrodes except Cathode	4.4	-	μf
Grid #1 to All Other Electrodes except Cathode & Grid #5	-	5	μf
Grid #1 to Cathode	2.6	-	μf
Grid #1 to Cathode & Grid #5	-	3	μf
Cathode to Shell, Grid #5, and All Other Electrodes except Grid #1	5	-	μf
Cathode and Grid #5 to All Other Electrodes except Grid #1	-	14	μf
Maximum Overall Length	2-5/8"	3-5/16"	
Maximum Seated Height	2-1/16"	2-3/4"	
Maximum Diameter	1-5/16"	1-5/16"	

Bulb	Metal Shell MT-8	T-9
Base	{ Small Wafer Octal 8-Pin	{ Intermed. Sh. Octal 8-Pin

- Pin 1 { 6SA7, Shell, Grid #5
6SA7-GT/G, No Conn.
- Pin 2 - Heater
- Pin 3 - Plate
- Pin 4 - Grids #2 & #4
- Pin 5 - Grid #1
- Pin 6 { 6SA7, Cathode
6SA7-GT/G, Cathode & Grid #5

- Pin 7 - Heater
- Pin 8 - Grid #3

Mounting Position

Any

Maximum And Minimum Ratings Are Design-Center Values

CONVERTER SERVICE

Plate Voltage	300 max. volts
Grids #2 & #4 Voltage	100 max. volts
Grids #2 & #4 Supply Voltage	300 max. volts
Grid #3 Voltage *	0 min. volts
Plate Dissipation	1.0 max. watt
Screen Dissipation	1.0 max. watt
Total Cathode Current	14 max. ma.

- in circuits where the cathode is not directly connected to the heater, the potential difference between heater and cathode should be kept as low as possible.
- ▲▲ with shell connected to cathode.
- ▲ with external shield connected to cathode.
- * For self-excited oscillator.
- ← Indicates a change.

Jan. 1, 1943

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

DATA



6SA7, 6SA7-GT/G PENTAGRID CONVERTER

(continued from preceding page)

Characteristics:


	<u>Self-excitation*</u>		<u>Separate Excitation</u>		
Plate Voltage	100	250	100	250	volts
Grids #2 & #4 Volt.	100	100	100	100	volts
Grid #3 (Control) Volt.	0	0	-2	-2	volts
Grid #1 Resistor	20000	20000	20000	20000	ohms
Plate Res. (Approx.)	0.5	1.0	0.5	1.0	megohm
Conversion Transcond.	425	450	425	450	μ hos
Conversion Transcond. (Approx.) ‡	2	2	2	2	μ hos
Plate Current	3.3	3.5	3.3	3.5	ma.
Grids #2 & #4 Current	8.5	8.5	8.5	8.5	ma.
Grid #1 Current	0.5	0.5	0.5	0.5	ma.
Total Cathode Current	12.3	12.5	12.3	12.5	ma.

NOTE: The transconductance between Grid #1 and Grids #2 & #4 connected to plate (not oscillating) is approximately 4500 μ hos under the following conditions: Grids #1, #3, and shell at 0 volts; Grids #2 & #4 and plate at 100 volts.

* Characteristics are approximate only and are shown for a Hartley circuit with a feedback of approximately 2 volts peak in the cathode circuit.

‡ With Grid #3 bias of -35 volts.

TYPICAL SELF-EXCITED CONVERTER CIRCUIT
FOR TYPE 6SA7

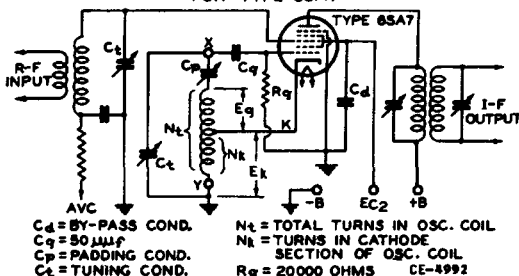

The license extended to the purchaser of tubes appears in the License Notice accompanying them. Information contained herein is furnished without assuming any obligations.




6SA7

6SA7

OPERATION CHARACTERISTICS
WITH SELF-EXCITATION $E_f = 6.3$ VOLTS

PLATE VOLTS = 250

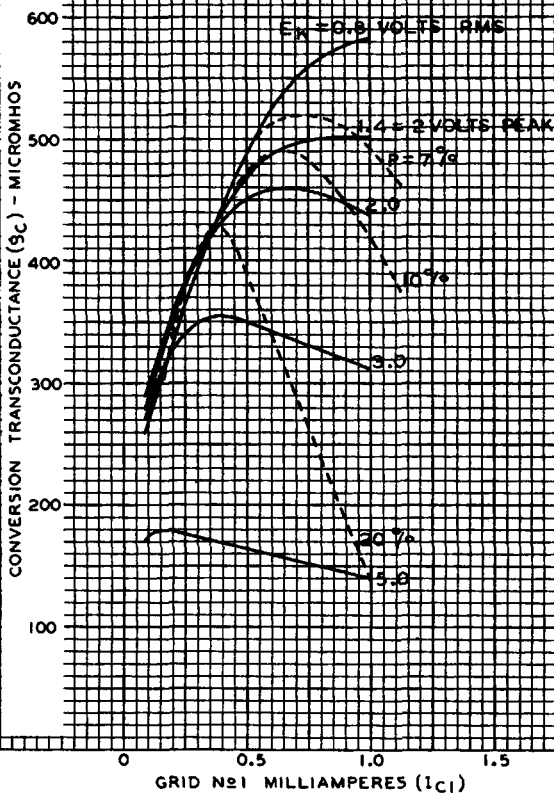GRIDS N $\circ$ 2 & N $\circ$ 4 VOLTS = 100GRID N $\circ$ 3 (CONTROL GRID) VOLTS = -1GRID N $\circ$ 1 RESISTOR-OHMS = 20000P = PERCENTAGE RATIO OF E_k TO $E_k + E_g$: SEE CIRCUIT


6SA7



6SA7

OPERATION CHARACTERISTIC
WITH SELF-EXCITATION $E_f = 6.3$ VOLTS

PLATE VOLTS = 250

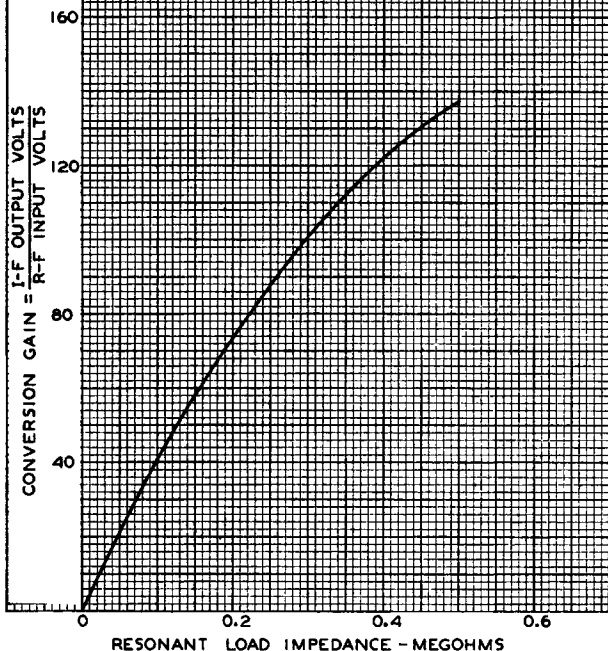
GRIDS N₂ & N₄ VOLTS = 100GRID N₃ (CONTROL GRID) VOLTS = 0GRID N₁ RESISTOR-OHMS = 20000GRID N₁ MILLIAMPERES = 0.5



6SA7

6SA7

OPERATION CHARACTERISTICS

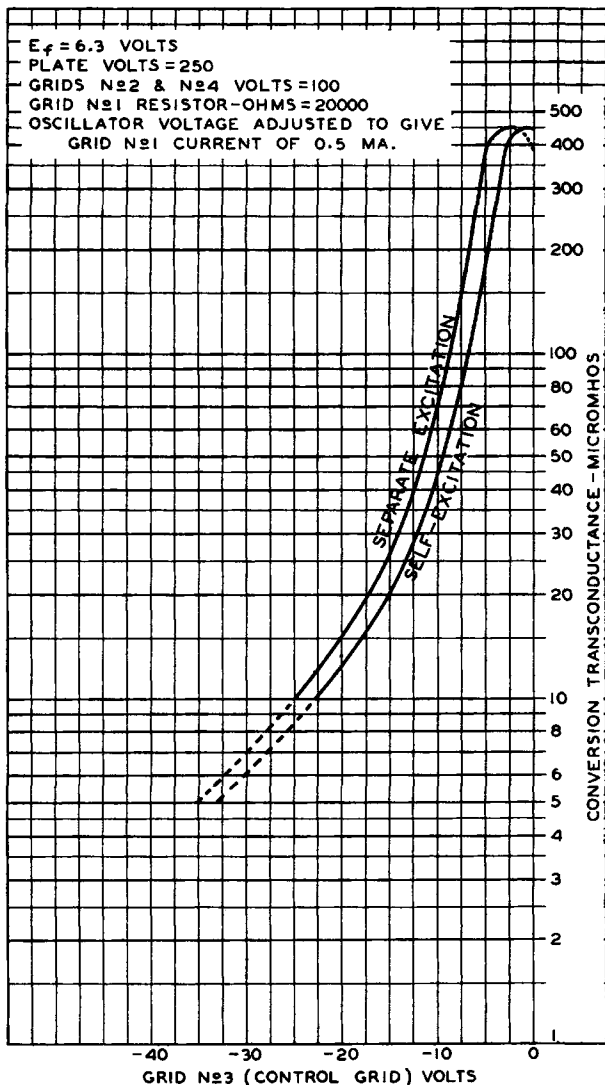


6SA7



6SA7

OPERATION CHARACTERISTICS WITH SEPARATE OSCILLATOR EXCITATION

$E_f = 6.3$ VOLTS
 PLATE VOLTS = 250
 GRIDS No 2 & No 4 VOLTS = 100
 GRID No 3 (CONTROL GRID) VOLTS = -2
 GRID No 1 RESISTOR-OHMS = 20000
 GRID No 1 CURRENT VARIED BY ADJUSTMENT
 OF OSCILLATOR VOLTAGE

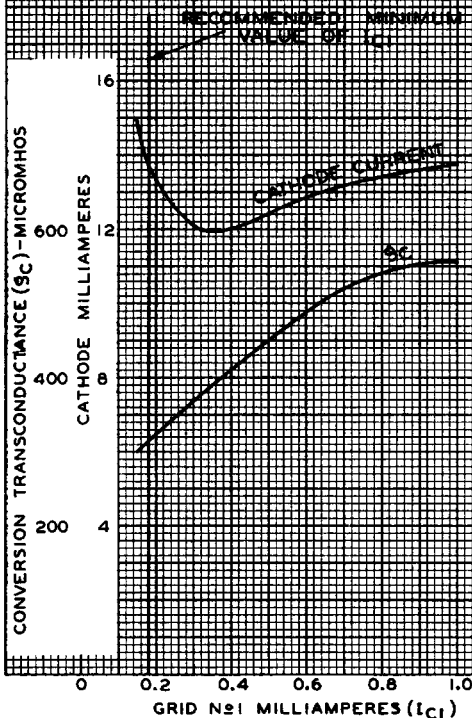

APR. 24, 1941

RCA RADOTRON DIVISION
RCA MANUFACTURING COMPANY, INC.

92C-4990R1