

TRIODE PENTODE

6U8

Combined triode and high slope r.f. pentode with separate cathodes. Primarily intended for use as a frequency changer at frequencies up to 220Mc/s.

HEATER

V_h	6.3	V
I_h	450	mA

MOUNTING POSITION

Any

CAPACITANCES

	Shielded	Unshielded	
C_{ap-at}	0.018	0.07	pF
C_{ap-gt}	0.0035	0.008	pF
C_{gp-at}	0.1	0.11	pF
C_{gp-gt}	0.0025	0.003	pF

Pentode section

C_{a-gl}	< 0.006	< 0.01	pF
C_{in}	5.0	5.0	pF
C_{out}	3.5	2.6	pF
C_{kp-h}	3.0	3.0	pF

Triode section

C_{a-k+h}	1.0	0.4	pF
C_{g-k+h}	2.5	2.5	pF
C_{a-g}	1.8	1.8	pF
C_{kt-h}	3.0	3.0	pF

CHARACTERISTICS

Pentode section

V_a	250	V
V_{g2}	110	V
I_a	10	mA
I_{g2}	3.5	mA
V_{g1}	-0.9	V
g_m	5.2	mA/V
r_a	400	kΩ
μ_{g1-g2}	35	
$V_{g1} (I_a = 10\mu A)$	-10	V

Triode section

V_a	150	V
I_a	18	mA
V_g	-1.0	V
g_m	8.5	mA/V
μ	40	
r_a	5.0	kΩ

6U8

TRIODE PENTODE

Combined triode and high slope r.f. pentode with separate cathodes. Primarily intended for use as a frequency changer at frequencies up to 220Mc/s.

TYPICAL OPERATING CONDITIONS

As a frequency changer

V_a	170	200	250	V
R_{g2}	30	45	70	k Ω
R_{g1}	1.0	1.0	1.0	M Ω
V_{g1}	0	0	0	V
I_a	4.7	4.9	5.2	mA
I_{g2}	2.0	1.9	1.9	mA
$V_{osc(r.m.s.)}$	3.0	3.0	3.0	V
I_{g1}	3.7	3.7	3.7	μ A
g_c	1.65	1.8	1.9	mA/V

Triode section as an oscillator

V_b	170	200	250	V
R_a	20	20	20	k Ω
R_{g-k}	20	20	20	k Ω
I_a	3.3	4.1	5.7	mA
I_g	160	160	160	μ A
$V_{osc(r.m.s.)}$	3.0	3.0	3.0	V
g_m (eff.)	2.8	3.2	4.0	mA/V

LIMITING VALUES

Pentode section

$V_{a(b)}$ max.	550	V
V_a max.	300	V
p_a max.	2.8	W
$V_{g2(b)}$ max.	550	V
V_{g2} max.	300	V
p_{g2} max.	500	mW
I_k max.	20	mA
R_{g1-k} max.	1.0	M Ω
V_{g1} ($I_{g1} = +0.3\mu$ A)	-1.3	V
V_{h-k} max. (cathode negative)	90	V
V_{h-k} max. (cathode positive)	90	V

Triode section

$V_{a(b)}$ max.	550	V
V_a max.	300	V
p_a max.	2.7	W
I_k max.	20	mA
R_{g-k} max.	1.0	M Ω
V_{h-k} max. (cathode negative)	90	V
V_{h-k} max. (cathode positive)	90	V
R_{h-k} max.	20	k Ω






TRIODE PENTODE

6U8

Combined triode and high slope r.f. pentode with separate cathodes. Primarily intended for use as a frequency changer at frequencies up to 220Mc/s.


3222

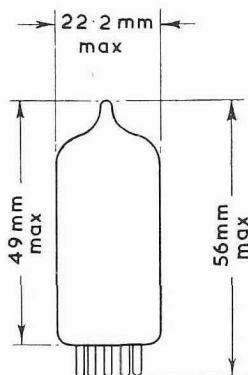

6U8

TRIODE PENTODE

Combined triode and high slope r.f. pentode with separate cathodes. Primarily intended for use as a frequency changer at frequencies up to 220Mc/s.

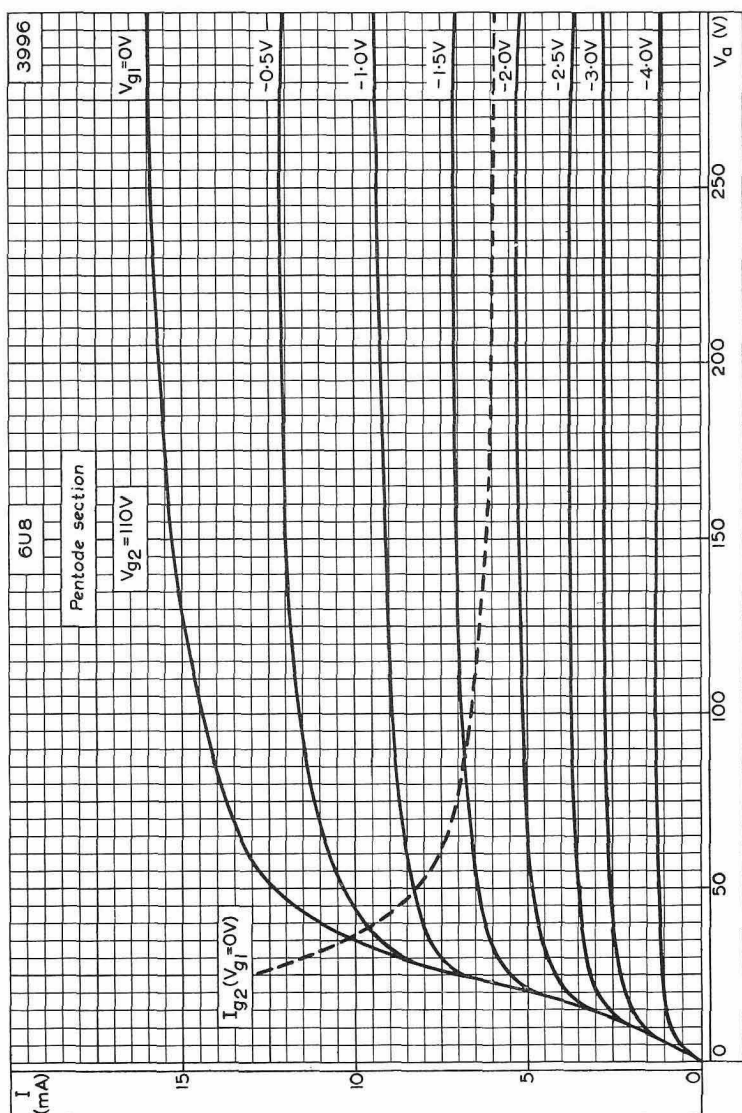


ANODE AND SCREEN-GRID CURRENTS PLOTTED AGAINST ANODE VOLTAGE FOR PENTODE SECTION WITH CONTROL-GRID VOLTAGE AS PARAMETER

TRIODE PENTODE

6U8

Combined triode and high slope r.f. pentode with separate cathodes. Primarily intended for use as a frequency changer at frequencies up to 220Mc/s.

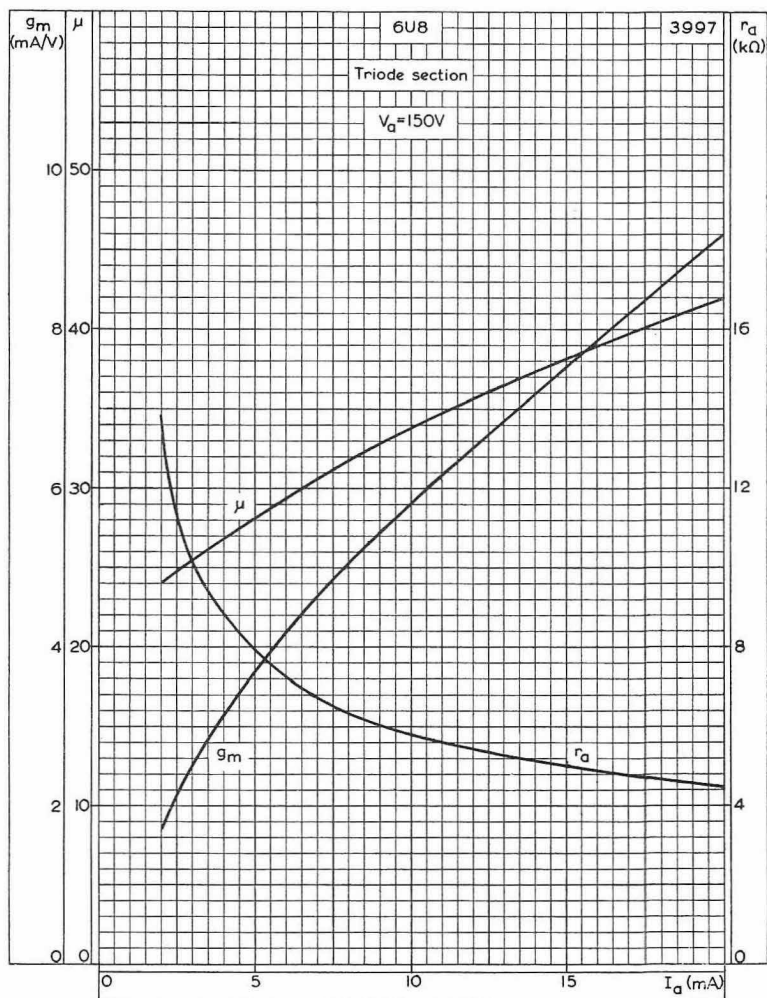


MUTUAL CONDUCTANCE, AMPLIFICATION FACTOR AND ANODE IMPEDANCE PLOTTED AGAINST ANODE CURRENT FOR TRIODE SECTION

6U8

TRIODE PENTODE

Combined triode and high slope r.f. pentode with separate cathodes. Primarily intended for use as a frequency changer at frequencies up to 220Mc/s.

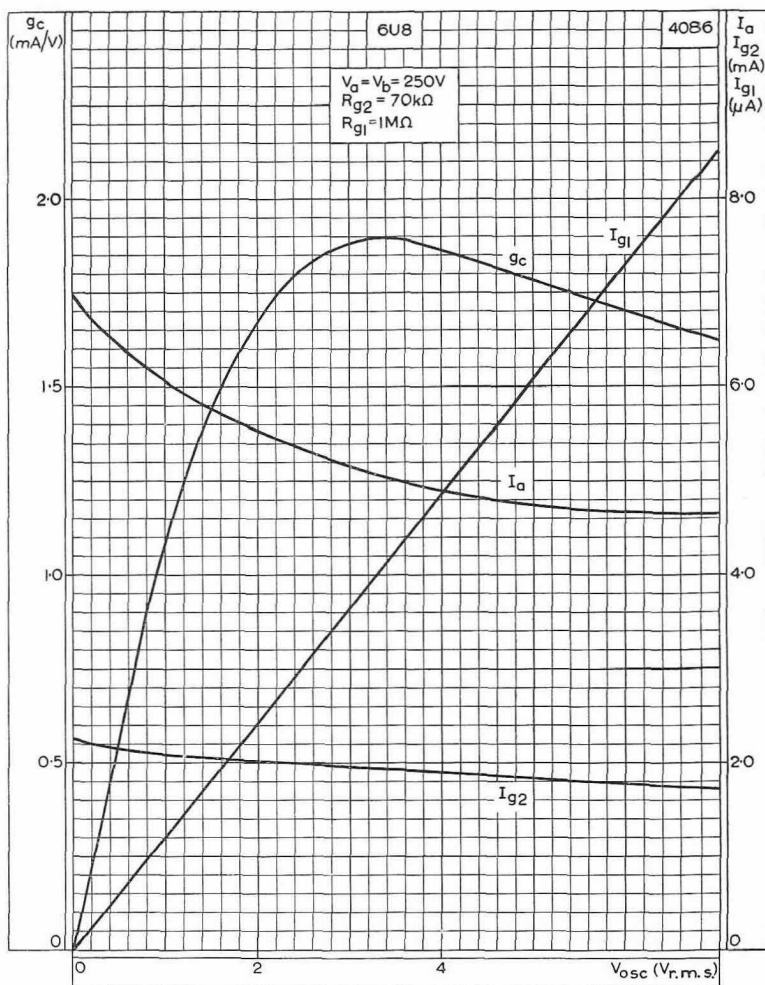


PERFORMANCE CURVES FOR USE AS A FREQUENCY CHANGER
 $V_a = V_b = 250V$

TRIODE PENTODE

6U8

Combined triode and high slope r.f. pentode with separate cathodes. Primarily intended for use as a frequency changer at frequencies up to 220Mc/s.

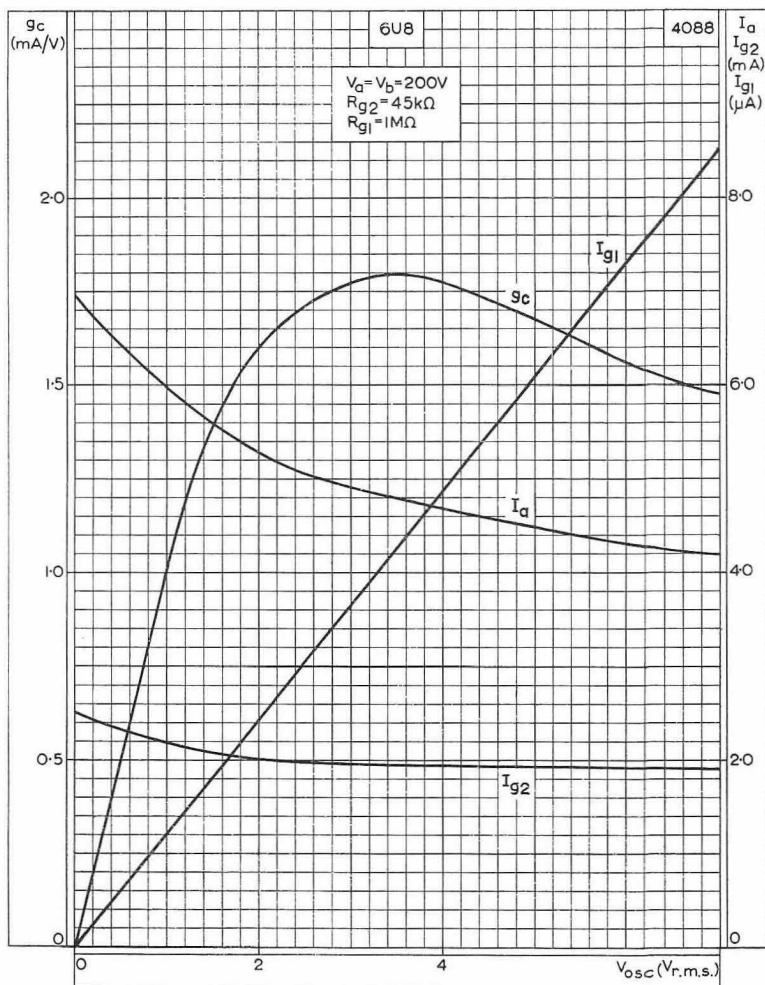


PERFORMANCE CURVES FOR USE AS A FREQUENCY CHANGER
 $V_a = V_b = 200V$

6U8

TRIODE PENTODE

Combined triode and high slope r.f. pentode with separate cathodes. Primarily intended for use as a frequency changer at frequencies up to 220Mc/s.

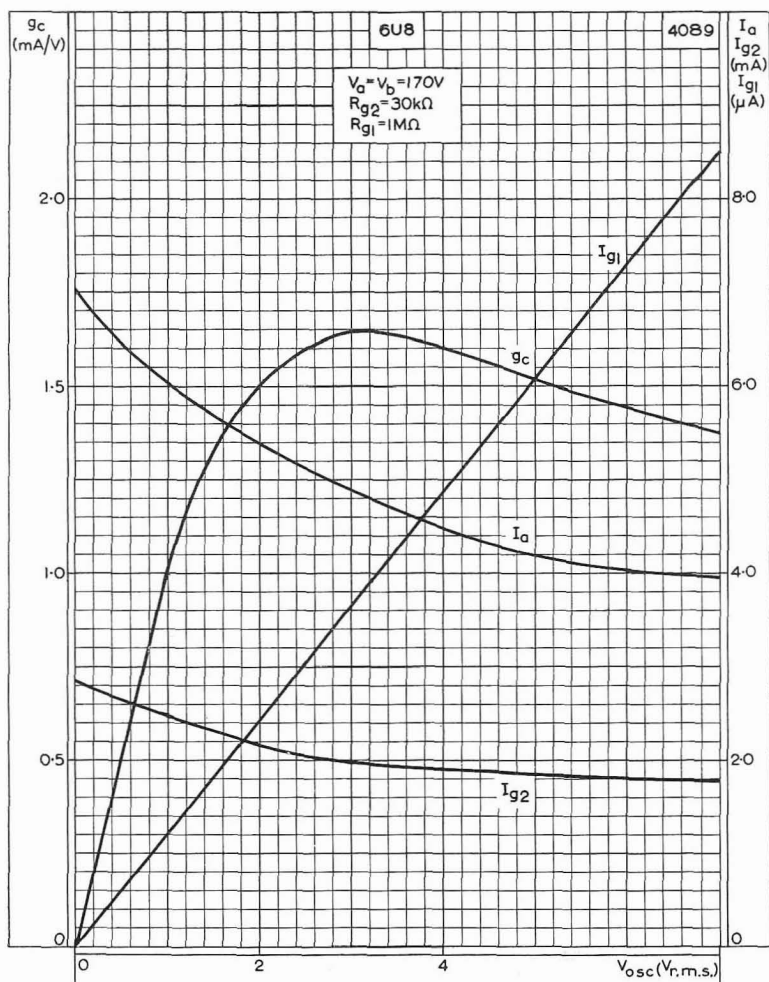

PERFORMANCE CURVES FOR USE AS A FREQUENCY CHANGER
 $V_a = V_b = 170V$