

Mullard

PHOTO ELECTRIC CELL

3530

The 3530 Photo Electric Cell is of the gas-filled type with a Caesium Cathode.

OPERATING CHARACTERISTICS

Maximum Anode Voltage	...	...	...	$V_{a_{max}}$	=	100 volts
Normal Anode Voltage	...	...	...	V_{aw}	=	100 volts
Glow Voltage	...	...	...	V_s	=	140 volts
Maximum Anode Current	...	...	...	$I_{a_{max}}$	=	7.5 μA
Sensitivity	...	...	...		=	150 $\mu A/Lm$
Minimum Safety Resistance	...	...	...	$R_{l_{min}}$	=	0.1 megohm



CAPACITY

Anode—Cathode	...	...	...	...	C_{ak}	=	5 μF
---------------	-----	-----	-----	-----	----------	---	-----------

CONNECTIONS

This cell is capped in a special 2-pin base.

PIN No. 1 ANODE
" 2 CATHODE

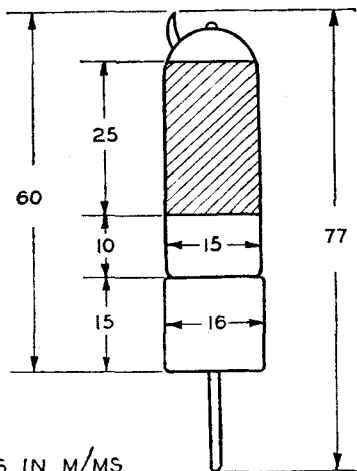

DIMENSIONS IN M/MS

3530

Mullard PHOTO ELECTRIC CELL

