



# 7203/4CX250B

## BEAM POWER TUBE

Ceramic-Metal Seals  
Coaxial-Electrode Structure  
Compact Design

For Use at Frequencies up to 500 Mc  
Forced-Air Cooled  
400 Watts CW Output to 175 Mc  
250 Watts CW Output at 500 Mc

This bulletin also applies to RCA-7204/4CX250F which is identical with RCA-7203/4CX250B except for its heater rating of  $26.5 \pm 10\%$  volts, 0.58 ampere. The 7204 is unilaterally interchangeable with the 4X250F and bilaterally interchangeable with the 4CX250F.

7204/4CX250F


2.464" Max. Length  
1.640" Max. Diameter  
Integral Radiator

RCA-7203/4CX250B is a very small and compact forced-air-cooled beam power tube constructed with ceramic-metal seals throughout and having a maximum plate dissipation of 250 watts. It is intended for service as an af power amplifier and modulator, a wide-band amplifier in video applications, a linear rf power amplifier in single-sideband suppressed-carrier equipment, and a class C amplifier and oscillator. The 7203 can be used with full ratings at frequencies up to 500 megacycles per second.

The ceramic-metal-seal construction employed in the 7203 permits operation at higher temperatures than a glass-seal construction and thus provides improved reliability. The specially designed, high-efficiency radiator which is brazed directly to the plate for better heat transfer, makes possible the maximum plate-dissipation rating of 250 watts with no sacrifice in tube reliability.

The terminal arrangement of the 7203 facilitates use of the tube with tank circuits of the coaxial type. Effective isolation of the output circuit from the input circuit is provided at the higher frequencies by the ring terminal for grid No.2. A base-pin termination for grid No.2 is also available for operation of the 7203 at the lower frequencies.

*The 7203 is unilaterally interchangeable with the 4X250B and bilaterally interchangeable with the 4CX250B.*

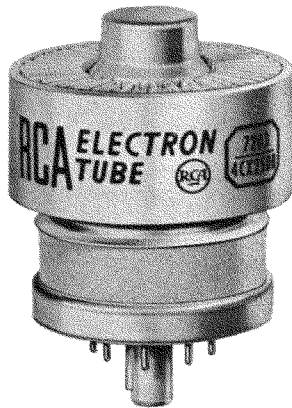

### GENERAL DATA

#### Electrical:

Heater, for Unipotential Cathode:

|                                     |                |         |
|-------------------------------------|----------------|---------|
| Voltage (AC or DC) $\phi$ . . . . . | 6.0 $\pm 10\%$ | volts   |
| Current at 6.0 volts . . . . .      | 2.6            | amp     |
| Minimum heating time . . . . .      | 30             | seconds |

Mu-Factor, Grid No.2 to Grid No.1,  
for grid-No.2 volts = 300 and  
grid-No.2 ma. = 50 . . . . . 5.0

Direct Interelectrode Capacitances (Approx.):  $\square$

|                                                          |      |                |
|----------------------------------------------------------|------|----------------|
| Grid No.1 to plate . . . . .                             | 0.03 | $\mu\text{mf}$ |
| Grid No.1 to cathode, grid No.2,<br>and heater . . . . . | 16   | $\mu\text{mf}$ |
| Plate to cathode, grid No.2,<br>and heater . . . . .     | 4.4  | $\mu\text{mf}$ |

#### Mechanical:

|                                  |                                                                                                                                                        |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating Position . . . . .     | Any                                                                                                                                                    |
| Maximum Overall Length . . . . . | 2.464"                                                                                                                                                 |
| Maximum Seated Length . . . . .  | 1.910"                                                                                                                                                 |
| Maximum Diameter . . . . .       | 1.640"                                                                                                                                                 |
| Base . . . . .                   | Special 8-Pin                                                                                                                                          |
| Socket . . . . .                 | Air-System Socket, such as SK-600 $\blacksquare$<br>and SK-606 Air Chimney $\blacksquare$ ; or 124-110-1 $\blacksquare$<br>(Supplied with Air Chimney) |

Radiator . . . . . Integral part of tube  
Air Flow:

**Through Indicated Air-System Socket**--This fitting directs the air over the base seals; past the grid-No.2 seal, envelope, and plate seal; and through the radiator to provide effective cooling with minimum air flow. When the tube is operated at maximum plate dissipation for each class of service, a minimum air flow of 3.8 cfm through the system is required. The corresponding pressure drop is approximately 0.3 inch of water. These requirements are for operation at sea level and at an ambient temperature of 20° C. At higher altitudes and ambient temperatures, the air flow must be increased to maintain the respective seal temperatures and the plate temperature within maximum ratings.

**Without Air-System Socket**--If an air-system socket is not used, it is essential that adequate cooling air be directed over the base seals, past the envelope, and through the radiator. Under these conditions and with the tube operating at maximum plate dissipation for each class of service, a minimum air flow of 3.6 cfm must pass through the radiator. The corresponding pressure drop is approximately 0.1 inch of water. These requirements are for operation at sea level and at an ambient temperature of 20° C. At higher altitudes and ambient temperatures, the air flow must be increased to maintain the respective seal temperatures and the plate temperature within maximum ratings.

|                                                                                                 |          |        |
|-------------------------------------------------------------------------------------------------|----------|--------|
| Plate Temperature (Measured on base<br>end of plate surface at junction<br>with fins) . . . . . | 250 max. | °C     |
| Temperature of Plate Seal, Grid-No.2<br>Seal, and Base Seals . . . . .                          | 250 max. | °C     |
| Weight (Approx.) . . . . .                                                                      | 4        | ounces |

- $\blacksquare$  Available from Eitel-McCullough, Inc., San Bruno, Calif.
- $\blacksquare$  Available from E. F. Johnson Co., Waseca, Minn.



## AF POWER AMPLIFIER & MODULATOR—Class AB<sub>1</sub>♦

### Maximum CCS<sup>®</sup> Ratings, Absolute-Maximum Values:\*

|                                                   |           |       |
|---------------------------------------------------|-----------|-------|
| DC PLATE VOLTAGE . . . . .                        | 2000 max. | volts |
| DC GRID-No.2 VOLTAGE . . . . .                    | 400 max.  | volts |
| MAX.—SIGNAL DC PLATE CURRENT* . . . . .           | 250 max.  | ma    |
| PLATE DISSIPATION* . . . . .                      | 250 max.  | watts |
| GRID-No.2 DISSIPATION* . . . . .                  | 12 max.   | watts |
| PEAK HEATER-CATHODE VOLTAGE:                      |           |       |
| Heater negative with respect to cathode . . . . . | 150 max.  | volts |
| Heater positive with respect to cathode . . . . . | 150 max.  | volts |

### Typical CCS Operation:

Values are for 2 tubes

|                                                      |      |      |      |       |
|------------------------------------------------------|------|------|------|-------|
| DC Plate Voltage . . . . .                           | 1000 | 1500 | 2000 | volts |
| DC Grid-No.2 Voltage . . . . .                       | 350  | 350  | 350  | volts |
| DC Grid-No.1 Voltage . . . . .                       | -55  | -55  | -55  | volts |
| Peak AF Grid-No.1-to-Grid-No.1 Voltage . . . . .     | 94   | 94   | 94   | volts |
| Zero-Signal DC Plate Current . . . . .               | 166  | 166  | 166  | ma    |
| Max.—Signal DC Plate Current . . . . .               | 500  | 500  | 500  | ma    |
| Zero-Signal DC Grid-No.2 Current . . . . .           | 0    | 0    | 0    | ma    |
| Max.—Signal DC Grid-No.2 Current (Approx.) . . . . . | 10   | 8    | 8    | ma    |
| Effective Load Resistance (Plate to plate) . . . . . | 3300 | 6000 | 8700 | ohms  |
| Max.—Signal Driving Power (Approx.) . . . . .        | 0    | 0    | 0    | watts |
| Max.—Signal Power Output (Approx.) . . . . .         | 220  | 400  | 590  | watts |

### Maximum Circuit Values:

Grid-No.1—Circuit Resistance (Per tube). 0.1 max. megohm

## RF POWER AMPLIFIER—Class B Television Service

Synchronizing-level conditions per tube unless otherwise specified

### Maximum CCS<sup>®</sup> Ratings, Absolute-Maximum Values:\*

54 to 216 Mc

|                                                   |           |       |
|---------------------------------------------------|-----------|-------|
| DC PLATE VOLTAGE . . . . .                        | 2000 max. | volts |
| DC GRID-No.2 VOLTAGE . . . . .                    | 400 max.  | volts |
| DC GRID-No.1 VOLTAGE . . . . .                    | -250 max. | volts |
| DC PLATE CURRENT (Average)† . . . . .             | 250 max.  | ma    |
| PLATE DISSIPATION . . . . .                       | 250 max.  | watts |
| GRID-No.2 DISSIPATION . . . . .                   | 12 max.   | watts |
| GRID-No.1 DISSIPATION . . . . .                   | 2 max.    | watts |
| PEAK HEATER-CATHODE VOLTAGE:                      |           |       |
| Heater negative with respect to cathode . . . . . | 150 max.  | volts |
| Heater positive with respect to cathode . . . . . | 150 max.  | volts |

### Typical CCS Operation with Bandwidth of 5 Mc:

|                                |      |      |      |       |
|--------------------------------|------|------|------|-------|
| DC Plate Voltage . . . . .     | 1000 | 1500 | 2000 | volts |
| DC Grid-No.2 Voltage . . . . . | 350  | 350  | 350  | volts |
| DC Grid-No.1 Voltage . . . . . | -60  | -65  | -70  | volts |
| Peak RF Grid-No.1 Voltage:     |      |      |      |       |
| Synchronizing level . . . . .  | 65   | 71   | 76   | volts |
| Pedestal level . . . . .       | 52   | 57   | 62   | volts |
| DC Plate Current:              |      |      |      |       |
| Synchronizing level . . . . .  | 355  | 360  | 360  | ma    |
| Pedestal level . . . . .       | 250  | 250  | 250  | ma    |
| DC Grid-No.2 Current:          |      |      |      |       |
| Synchronizing level . . . . .  | 27   | 29   | 29   | ma    |
| Pedestal level . . . . .       | 4    | 0    | 0    | ma    |
| DC Grid-No.1 Current:          |      |      |      |       |
| Synchronizing level . . . . .  | 2    | 5    | 5    | ma    |
| Pedestal level . . . . .       | 0    | 0    | 0    | ma    |
| Driving Power (Approx.):‡      |      |      |      |       |
| Synchronizing level . . . . .  | 0.4  | 1.2  | 1.2  | watts |
| Pedestal level . . . . .       | 0    | 0    | 0    | watts |

### Power Output (Approx.):

|                               |     |     |     |       |
|-------------------------------|-----|-----|-----|-------|
| Synchronizing level . . . . . | 160 | 300 | 440 | watts |
| Pedestal level . . . . .      | 90  | 170 | 250 | watts |

## LINEAR RF POWER AMPLIFIER Single-Sideband Suppressed-Carrier Service

### Maximum CCS<sup>®</sup> Ratings, Absolute-Maximum Values:\*

Up to 500 Mc

|                                                   |           |       |
|---------------------------------------------------|-----------|-------|
| DC PLATE VOLTAGE . . . . .                        | 2000 max. | volts |
| DC GRID-No.2 VOLTAGE . . . . .                    | 400 max.  | volts |
| MAX.—SIGNAL DC PLATE CURRENT . . . . .            | 250 max.  | ma    |
| PLATE DISSIPATION . . . . .                       | 250 max.  | watts |
| GRID-No.2 DISSIPATION . . . . .                   | 12 max.   | watts |
| PEAK HEATER-CATHODE VOLTAGE:                      |           |       |
| Heater negative with respect to cathode . . . . . | 150 max.  | volts |
| Heater positive with respect to cathode . . . . . | 150 max.  | volts |

### Typical CCS Class AB<sub>1</sub> "Single-Tone" Operation

up to 175 Mc:‡‡

|                                                 |      |      |      |       |
|-------------------------------------------------|------|------|------|-------|
| DC Plate Voltage . . . . .                      | 1000 | 1500 | 2000 | volts |
| DC Grid-No.2 Voltage† . . . . .                 | 350  | 350  | 350  | volts |
| DC Grid-No.1 Voltage . . . . .                  | -55  | -55  | -55  | volts |
| Zero-Signal DC Plate Current . . . . .          | 83   | 83   | 83   | ma    |
| Zero-Signal DC Grid-No.2 Current . . . . .      | 0    | 0    | 0    | ma    |
| Effective RF Load Resistance . . . . .          | 1650 | 3000 | 4350 | ohms  |
| Max.—Signal DC Plate Current . . . . .          | 250  | 250  | 250  | ma    |
| Max.—Signal DC Grid-No.2 Current . . . . .      | 5    | 4    | 4    | ma    |
| Max.—Signal Peak RF Grid-No.1 Voltage . . . . . | 47   | 47   | 47   | volts |
| Max.—Signal Driving Power (Approx.) . . . . .   | 0    | 0    | 0    | watts |
| Max.—Signal Power Output (Approx.) . . . . .    | 110  | 200  | 295  | watts |

### Typical CCS Operation with "Two-Tone Modulation"

at 30 Mc:‡‡‡

|                                                    |      |      |       |       |
|----------------------------------------------------|------|------|-------|-------|
| DC Plate Voltage . . . . .                         | 1000 | 1500 | 2000  | volts |
| DC Grid-No.2 Voltage† . . . . .                    | 350  | 350  | 350   | volts |
| DC Grid-No.1 Voltage** . . . . .                   | -55  | -55  | -55   | volts |
| Zero-Signal DC Plate Current . . . . .             | 83   | 83   | 83    | ma    |
| Effective RF Load Resistance . . . . .             | 1650 | 3000 | 4350  | ohms  |
| DC Plate Current at Peak of Envelope . . . . .     | 250  | 250  | 250   | ma    |
| Average DC Plate Current . . . . .                 | 175  | 175  | 175   | ma    |
| DC Grid-No.2 Current at Peak of Envelope . . . . . | 30   | 30   | 30    | ma    |
| Average DC Grid-No.2 Current . . . . .             | 6    | 9.5  | 15    | ma    |
| Average DC Grid-No.1 Current . . . . .             | 0    | 0    | 0     | ma    |
| Peak-Envelope Driver Power (Approx.) . . . . .     | 1    | 1    | 1     | watt  |
| Output-Circuit Efficiency (Approx.) . . . . .      | 95   | 95   | 95    | %     |
| Distortion Products Level:‡                        |      |      |       |       |
| Third Order . . . . .                              | 29   | 29   | 30    | db    |
| Fifth Order . . . . .                              | 40   | 38   | 35    | db    |
| Useful Power Output (Approx.):‡                    |      |      |       |       |
| Average . . . . .                                  | 55   | 100  | 147.5 | watts |
| Peak Envelope . . . . .                            | 110  | 200  | 295   | watts |

### Maximum Circuit Values:

Grid-No.1—Circuit Resistance Under Any Condition:  
With fixed bias . . . . . 25000 max. ohms  
With cathode bias . . . . . Not recommended

## PLATE-MODULATED RF POWER AMP.—Class C Telephony

Carrier conditions per tube for use with a max. modulation factor of 1.0

### Maximum CCS<sup>®</sup> Ratings, Absolute-Maximum Values:\*

Up to 500 Mc

|                                |           |       |
|--------------------------------|-----------|-------|
| DC PLATE VOLTAGE . . . . .     | 1500 max. | volts |
| DC GRID-No.2 VOLTAGE . . . . . | 300 max.  | volts |
| DC GRID-No.1 VOLTAGE . . . . . | -250 max. | volts |
| DC PLATE CURRENT . . . . .     | 200 max.  | ma    |



|                                                   |          |       |
|---------------------------------------------------|----------|-------|
| PLATE DISSIPATION. . . . .                        | 165 max. | watts |
| GRID-No.2 DISSIPATION. . . . .                    | 8 max.   | watts |
| GRID-No.1 DISSIPATION. . . . .                    | 2 max.   | watts |
| PEAK HEATER-CATHODE VOLTAGE:                      |          |       |
| Heater negative with respect to cathode . . . . . | 150 max. | volts |
| Heater positive with respect to cathode . . . . . | 150 max. | volts |

#### Typical CCS Operation at Frequencies up to 175 Mc:

|                                                        |      |      |      |       |
|--------------------------------------------------------|------|------|------|-------|
| DC Plate Voltage . . . . .                             | 500  | 1000 | 1500 | volts |
| DC Grid-No.2 Voltage (Modulated approx. 55%) . . . . . | 250  | 250  | 250  | volts |
| DC Grid-No.1 Voltage . . . . .                         | -100 | -100 | -100 | volts |
| Peak RF Grid-No.1 Voltage. . . . .                     | 113  | 113  | 113  | volts |
| DC Plate Current . . . . .                             | 200  | 200  | 200  | ma    |
| DC Grid-No.2 Current . . . . .                         | 32   | 31   | 31   | ma    |
| DC Grid-No.1 Current (Approx.) . . . . .               | 6    | 6    | 6    | ma    |
| Driving Power (Approx.) . . . . .                      | 0.7  | 0.7  | 0.7  | watt  |
| Power Output (Approx.) . . . . .                       | 50   | 140  | 235  | watts |

#### Maximum Circuit Values:

|                                                           |            |      |
|-----------------------------------------------------------|------------|------|
| Grid-No.1-Circuit Resistance Under Any Condition. . . . . | 25000 max. | ohms |
|-----------------------------------------------------------|------------|------|

### RF POWER AMPLIFIER & OSC.—Class C Telegraphy† and

### RF POWER AMPLIFIER—Class C FM Telephony

#### Maximum CCS\* Ratings, Absolute-Maximum Values:‡

Up to 500 Mc

|                                                   |           |       |
|---------------------------------------------------|-----------|-------|
| DC PLATE VOLTAGE . . . . .                        | 2000 max. | volts |
| DC GRID-No.2 VOLTAGE . . . . .                    | 300 max.  | volts |
| DC GRID-No.1 VOLTAGE . . . . .                    | -250 max. | volts |
| DC PLATE CURRENT . . . . .                        | 250 max.  | ma    |
| PLATE DISSIPATION. . . . .                        | 250 max.  | watts |
| GRID-No.2 DISSIPATION. . . . .                    | 12 max.   | watts |
| GRID-No.1 DISSIPATION. . . . .                    | 2 max.    | watts |
| PEAK HEATER-CATHODE VOLTAGE:                      |           |       |
| Heater negative with respect to cathode . . . . . | 150 max.  | volts |
| Heater positive with respect to cathode . . . . . | 150 max.  | volts |

#### Typical CCS Operation at Frequencies up to 175 Mc:

|                                          |     |      |      |      |       |
|------------------------------------------|-----|------|------|------|-------|
| DC Plate Voltage . . . . .               | 500 | 1000 | 1500 | 2000 | volts |
| DC Grid-No.2 Voltage . . . . .           | 250 | 250  | 250  | 250  | volts |
| DC Grid-No.1 Voltage . . . . .           | -90 | -90  | -90  | -90  | volts |
| Peak RF Grid-No.1 Voltage. . . . .       | 109 | 109  | 109  | 109  | volts |
| DC Plate Current . . . . .               | 250 | 250  | 250  | 250  | ma    |
| DC Grid-No.2 Current . . . . .           | 48  | 45   | 36   | 30   | ma    |
| DC Grid-No.1 Current (Approx.) . . . . . | 12  | 12   | 11   | 11   | ma    |
| Driving Power (Approx.) . . . . .        | 1   | 1    | 1    | 1    | watt  |
| Power Output (Approx.) . . . . .         | 65  | 180  | 290  | 400  | watts |

#### Typical CCS Operation at Frequency of 500 Mc with

##### Coaxial Cavity:

|                                          |      |       |
|------------------------------------------|------|-------|
| DC Plate Voltage. . . . .                | 2000 | volts |
| DC Grid-No.2 Voltage. . . . .            | 300  | volts |
| DC Grid-No.1 voltage. . . . .            | -90  | volts |
| DC Plate Current. . . . .                | 250  | ma    |
| DC Grid-No.2 Current. . . . .            | 10   | ma    |
| DC Grid-No.1 Current (Approx.) . . . . . | 25   | ma    |
| Driver Power Output (Approx.) . . . . .  | 18   | watts |
| Useful Power Output (Approx.) . . . . .  | 250  | watts |

#### Maximum Circuit Values:

|                                                            |            |      |
|------------------------------------------------------------|------------|------|
| Grid-No.1-Circuit Resistance Under Any Condition . . . . . | 25000 max. | ohms |
|------------------------------------------------------------|------------|------|

### CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN

Note Min. Max.

|                    |   |      |      |     |
|--------------------|---|------|------|-----|
| Heater Current:    |   |      |      |     |
| Type 7203. . . . . | 1 | 2.3  | 2.9  | amp |
| Type 7204. . . . . | 2 | 0.50 | 0.62 | amp |

|                                                           | Note    | Min. | Max. |       |
|-----------------------------------------------------------|---------|------|------|-------|
| Direct Interelectrode Capacitances (Types 7203 & 7204): □ |         |      |      |       |
| Grid No.1 to plate . . . . .                              | —       | —    | 0.06 | μmf   |
| Grid No.1 to cathode, grid No.2, and heater. . . . .      | —       | 14.2 | 17.2 | μmf   |
| Plate to cathode, grid No.2, and heater. . . . .          | —       | 4.0  | 4.8  | μmf   |
| Grid-No.1 Voltage:                                        |         |      |      |       |
| Type 7203. . . . .                                        | 1,3,7,8 |      |      |       |
| Type 7204. . . . .                                        | 2,3,7,8 | -32  | -46  | volts |
| Grid-No.2 Current:                                        |         |      |      |       |
| Type 7203. . . . .                                        | 1,3,7,8 |      |      |       |
| Type 7204. . . . .                                        | 2,3,7,8 | -7   | +3   | ma    |
| Useful Power Output:                                      |         |      |      |       |
| Type 7203. . . . .                                        | 5,7,8   |      |      |       |
| Type 7204. . . . .                                        | 6,7,8   | 225  | —    | watts |

Note 1: With 6.0 volts on heater.

Note 2: With 26.5 volts on heater.

Note 3: With dc plate voltage of 1000 volts, dc grid-No.2 voltage of 300 volts, and grid-No.1 voltage adjusted to give plate current of 150 ma.

Note 4: With plate floating, dc grid-No.2 voltage of 300 volts, and grid-No.1 voltage adjusted to give grid-No.2 current of 50 ma.

Note 5: With heater voltage of 5.5 volts, dc plate voltage of 2000 volts, dc grid-No.2 voltage of 300 volts, dc grid-No.1 bias of -90 volts, dc grid-No.1 current of 25 ma maximum, grid-No.1 signal voltage adjusted to produce dc plate current of 250 ma, and coaxial-cavity amplifier circuit operating at a frequency of 475 Mc.

Note 6: Same as Note 5 except heater voltage is 24.3 volts.

Note 7: With Forced-Air Cooling as specified under GENERAL DATA—Air-System Socket.

Note 8: Heater voltage must be applied for at least 30 seconds before application of other voltages.

### SPECIAL PERFORMANCE DATA

#### Interelectrode Leakage:

This test is destructive and is performed on a sample lot of tubes from each production run under the following conditions: ac heater volts=6.6 for type 7203 or 29.1 for type 7204, no voltage on other elements, and specified forced-air cooling for Air-System Socket. At the end of 500 hours, with tube at 250° C, and with no voltage applied to heater, the minimum resistance between indicated electrodes as measured with a 500-volt Megger-type ohmmeter having an internal impedance of 2.5 megohms, will be:

|                                  |         |         |
|----------------------------------|---------|---------|
| Grid No.1 and Grid No.2. . . . . | 10 min. | megohms |
| Grid No.1 and Cathode. . . . .   | 10 min. | megohms |
| Grid No.2 and Cathode. . . . .   | 10 min. | megohms |

§

Because the cathode is subjected to considerable back bombardment as the frequency is increased with resultant increase in temperature, the heater voltage should be reduced depending on operating conditions and frequency to prevent overheating the cathode and resultant short life.

□

With cylindrical shield JEDEC No.320 surrounding radiator; and with a cylindrical shield JEDEC No.321 surrounding the grid-No.2 ring terminal. Both shields are connected to ground.

#

The maximum ratings in the tabulated data are established in accordance with the following definition of the Absolute-Maximum Rating System for rating electron devices. Absolute-Maximum ratings are limiting values of operating and environmental conditions applicable to any electron device of a specified type as defined by its published data, and should not be exceeded under the worst probable conditions.

The device manufacturer chooses these values to provide acceptable serviceability of the device, taking no responsibility for equipment variations, environment variations, and the effects of changes in operating conditions due to variations in device characteristics.



The equipment manufacturer should design so that initially and throughout life no Absolute-Maximum value for the intended service is exceeded with any device under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in device characteristics.

◆ Subscript 1 indicates that grid-No.1 current does not flow during any part of the input cycle.

● Continuous Commercial Service.

\* Averaged over any audio-frequency cycle of sine-wave form.

⊕ Averaged over any frame.

↓ The driver stage is required to supply tube losses and rf circuit losses. The driver stage should be designed to provide an excess of power above the indicated values to take care of variations in line voltage, in components, in initial tube characteristics, and in tube characteristics during life.

⦿ "Single-Tone" operation refers to that class of amplifier service in which the grid-No.1 input consists of a monofrequency rf signal having constant amplitude. This signal is produced in a single-sideband suppressed-carrier system when a single audio frequency of constant amplitude is applied to the input of the system.

† Preferably obtained from a fixed supply.

□ "Two-Tone Modulation" operation refers to that class of amplifier service in which the input consists of two equal monofrequency rf signals having constant amplitude. These signals are produced in a single-sideband suppressed-carrier system when two equal-and-constant-amplitude audio frequencies are applied to the input of the system.

\*\* Obtained from a fixed supply.

⊕ Without the use of feedback to enhance linearity.

▲ Measured at load of output circuit having indicated efficiency.

▲ The dc grid-No.2 voltage must be modulated approximately 55% in phase with the plate modulation in order to obtain 100% modulation of the 7203. The use of a series grid-No.2 resistor or reactor may not give satisfactory performance and is therefore not recommended.

★ Obtained from grid-No.1 resistor or from a combination of grid-No.1 resistor with either fixed supply or cathode resistor.

† Key-down conditions per tube without amplitude modulation. Amplitude modulation essentially negative may be used if the positive peak of the audio-frequency envelope does not exceed 115% of the carrier conditions.

## OPERATING CONSIDERATIONS

The *maximum temperatures* in the tabulated data for the base seals, grid-No.2 seal, plate seal, and plate are tube ratings and are to be observed in the same manner as other tube ratings. The temperature of the respective seals and of the plate may conveniently be measured with temperature-sensitive paint, such as Tempilaq. The latter is made by the Tempil Corporation, 132 W. 22nd Street, New York 11, N.Y. in the form of liquid and stick.

The *socket* for the 7203 should be of a type (such as is indicated in the tabulated data) which permits adequate air-cooling of the tube. Although the base will fit a conventional lock-in socket, the latter does not permit adequate cooling and its use is therefore not recommended.

The *plate connection* is made by means of a metal band or spring contacts to the cylindrical surface of the radiator. It is essential that the contact areas be kept clean to minimize rf losses especially at the higher frequencies.

The *rated plate and grid-No.2 voltages of this tube are extremely dangerous to the user*. Great care should be taken during the adjustment of circuits. The tube and its associated apparatus, especially all parts which may be at high potential above ground, should be housed in a protective enclosure. The protective housing should be designed with interlocks so that personnel can not possibly come in contact with any high-potential point in the electrical system. The interlock devices should function to break the primary circuit of the high-voltage supplies when any gate or door on the protective housing is opened, and should prevent the closing of this primary circuit until the door is again locked.

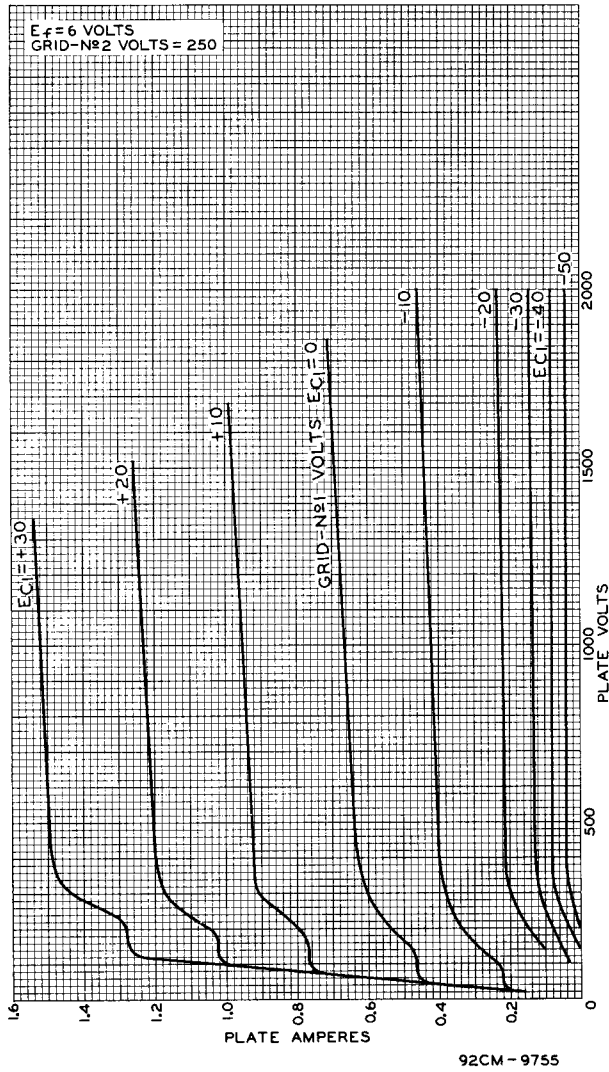


Fig.1 - Typical Plate Characteristics of Type 7203.

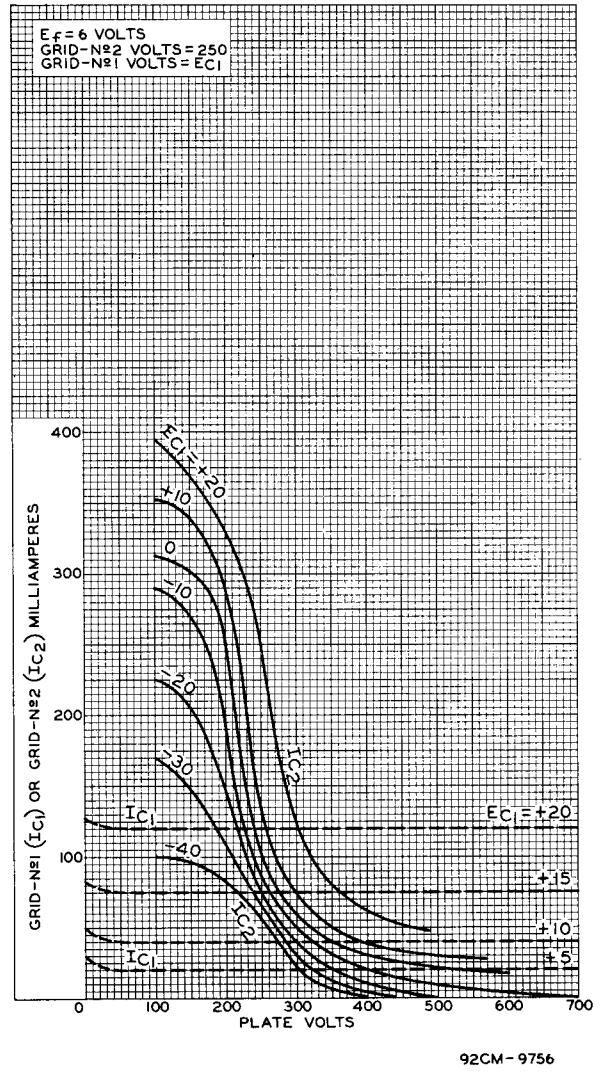


Fig.2 - Typical Characteristics of Type 7203.

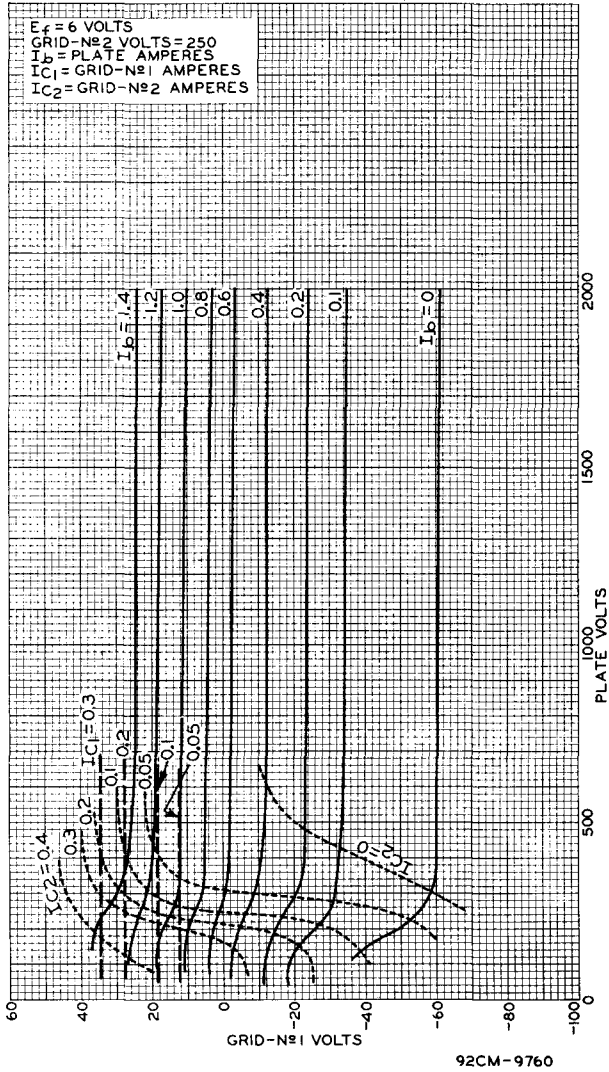


Fig. 3 - Typical Constant-Current Characteristics of Type 7203.


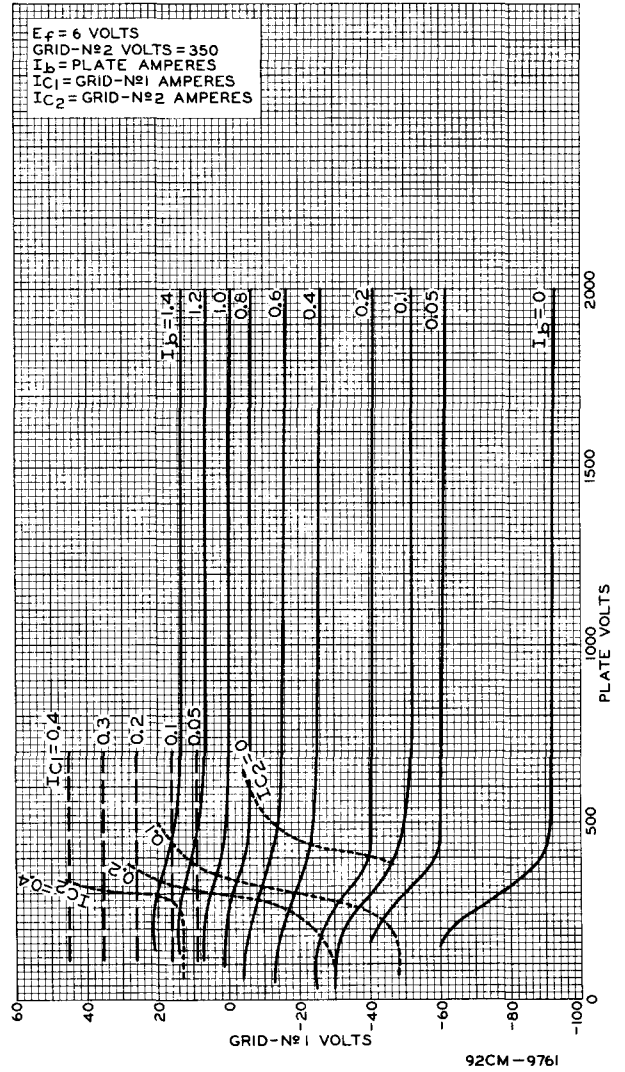


Fig. 4 - Typical Constant-Current Characteristics of Type 7203.



## DIMENSIONAL OUTLINE

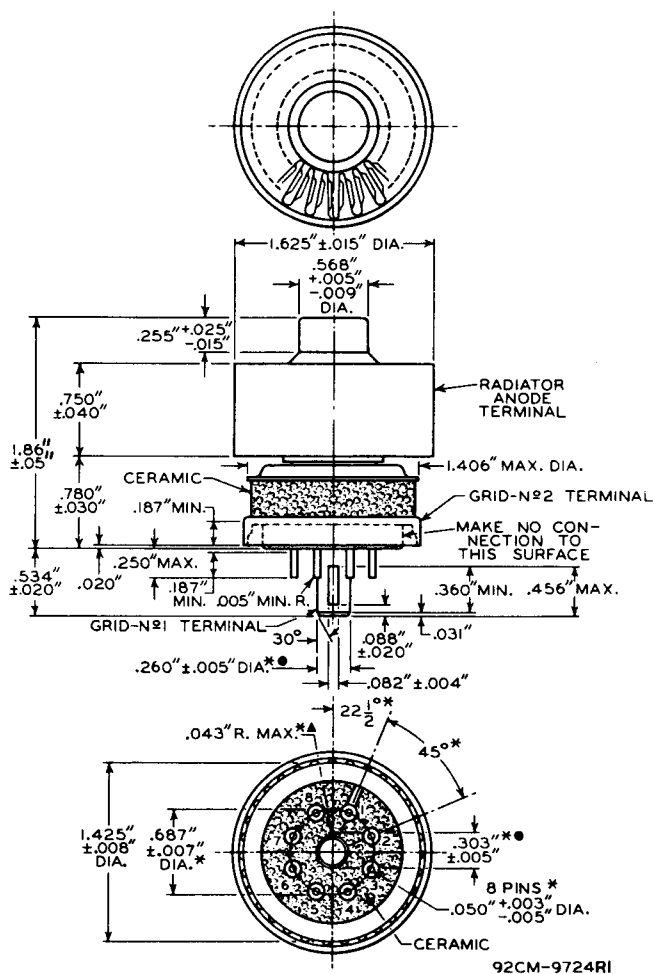

92CM-9724RI

GRID-No.1 PLUG DIMENSIONS ARE MEASURED BY THE USE OF THE SERIES OF GAUGES SHOWN IN SKETCHES G<sub>1</sub> AND G<sub>2</sub>. IN THE FOLLOWING INSTRUCTIONS FOR THE USE OF THESE GAUGES, "GO" INDICATES THAT THE ENTIRE GRID-No.1 PLUG KEY WILL ENTER THE GAUGE; AND "NO-GO" INDICATES THAT THE GRID-No.1 PLUG KEY WILL NOT ENTER THE GAUGE MORE THAN 1/16". INSTRUCTIONS FOR THE USE OF THE GAUGES FOLLOW:

▲ GAUGES G<sub>1</sub>-1, G<sub>1</sub>-2, G<sub>1</sub>-3, AND G<sub>1</sub>-4:

USING ONLY SLOT C, TRY THESE GAUGES IN NUMERICAL ORDER UNTIL ONE IS FOUND THAT WILL ACCEPT THE ENTIRE

GRID-No.1 PLUG. USING THE FIRST GAUGE THUS FOUND, IT WILL NOT BE POSSIBLE TO INSERT THE GRID-No.1 PLUG IN SLOT B.

● GAUGES G<sub>2</sub>-1, G<sub>2</sub>-2, AND G<sub>2</sub>-3:


THE GRID-No.1 PLUG WILL BE REJECTED BY GAUGES G<sub>2</sub>-1 AND G<sub>2</sub>-2, BUT WILL BE ACCEPTED BY GAUGE G<sub>2</sub>-3.

\* BASE-PIN POSITIONS ARE HELD TO TOLERANCES SUCH THAT THE ENTIRE LENGTH OF THE PINS WILL, WITHOUT UNDUE FORCE, PASS INTO AND DISENGAGE FROM THE FLAT-PLATE GAUGE SHOWN IN SKETCH G<sub>3</sub>.

## BASING DIAGRAM

### Bottom View


- PIN 1: GRID No.2 (For use at the lower frequencies)
- PIN 2: CATHODE
- PIN 3: HEATER
- PIN 4: CATHODE
- PIN 5: INTERNAL CONNECTION--DO NOT USE
- PIN 6: CATHODE



- PIN 7: HEATER
- PIN 8: CATHODE
- BASE INDEX PLUG: GRID No.1
- RADIATOR: PLATE
- RING TERMINAL: GRID No.2 (For use at the higher frequencies)




Gauge Sketch G<sub>1</sub>

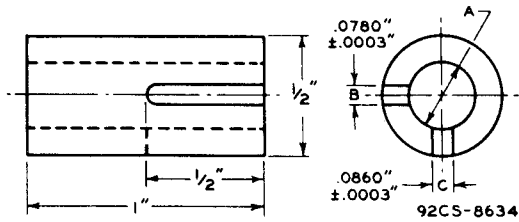

92CS-8634

| Gauge              | Dimension A                 |
|--------------------|-----------------------------|
| G <sub>1</sub> - 1 | .2575" + .0000"<br>- .0005" |
| G <sub>1</sub> - 2 | .2600" + .0000"<br>- .0005" |
| G <sub>1</sub> - 3 | .2625" + .0000"<br>- .0005" |
| G <sub>1</sub> - 4 | .2650" + .0000"<br>- .0005" |


Gauge Sketch G<sub>2</sub>

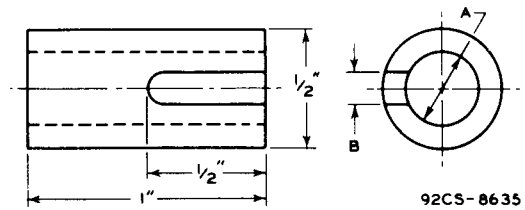

92CS-8635


| Gauge              | Dimension                   |       |
|--------------------|-----------------------------|-------|
|                    | A                           | B     |
| G <sub>2</sub> - 1 | .2550" + .0000"<br>- .0005" | .125" |
| G <sub>2</sub> - 2 | .2980" + .0000"<br>- .0005" | none  |
| G <sub>2</sub> - 3 | .3080" + .0000"<br>- .0005" | none  |

Suggested Design for Extractor to Remove Tube from Cavity

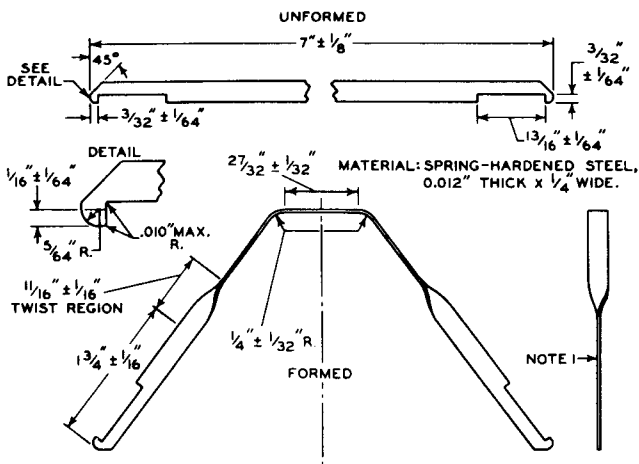

92CS-9800RI

Gauge Sketch G<sub>3</sub>

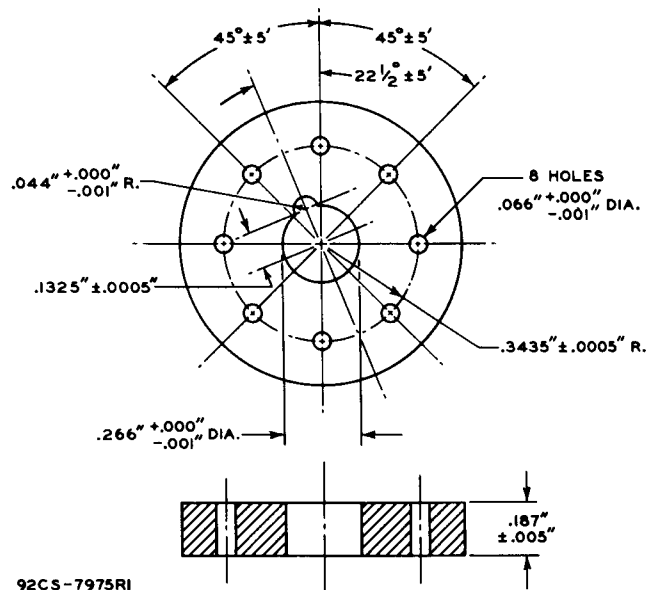

92CS-7975RI

TOLERANCES ARE NOT CUMULATIVE

Information furnished by RCA is believed to be accurate and reliable. However, no responsibility is assumed by RCA for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of RCA.