



Repeater Triode

3A/107A

3A/107B

3A/107A

3A/107B

(3A/107A is for replacement purposes only)

CATHODE.

Oxide-coated filament

Current

0.25

A

Nominal voltage

4

V

RATING.

Amplification factor { Measured at V_a 130V } 7

Impedance

{ V_{g1} -8V, I_f 0.25A D.C. } 5,500

ohms

DIRECT INTER-ELECTRODE CAPACITIES.

Grid to anode

4.7

pF

Grid to filament

6.2

pF

Anode to filament

2.1

pF

BASE.

3A/107A American 4-pin bayonet

3A/107B Standard 5-pin British

DIMENSIONS.

Maximum overall length

3A/107A

116

mm.

3A/107B

118

mm.

Maximum bulb diameter

46

mm.

Net weight

44



g.

MAXIMUM RATINGS.

Maximum direct anode voltage

190

V

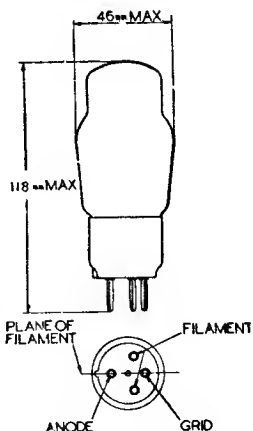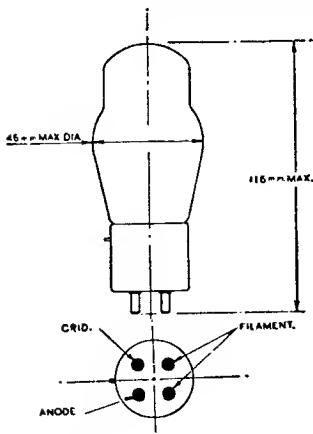

3A/107A
3A/107B

Repeater Triode



3A/107A
3A/107B

