



Repeater Triode

3A/108A

3A/108B

3A/108A

3A/108B

(3A/108A is for replacement purposes only)

CATHODE.

Oxide-coated filament

Current 0.25 A

Nominal voltage 2 V

RATING.

Amplification factor } Measured at V_a 130V { 30
Impedance } V_{g1} -1.5V, I_f 0.25A D.C. { 50,000 ohms

DIRECT INTER-ELECTRODE CAPACITIES.

Grid to anode 5.0 pF

Grid to filament 5.0 pF

Anode to filament 2.5 pF

BASE.

3A/108A American 4-pin bayonet

3A/108B Standard 5-pin British

DIMENSIONS.

Maximum overall length

3A/108A 116 mm.



3A/108B 118 mm.

Maximum bulb diameter 46 mm.

Net weight 44 g.

MAXIMUM RATINGS.

Maximum direct anode voltage 190 V

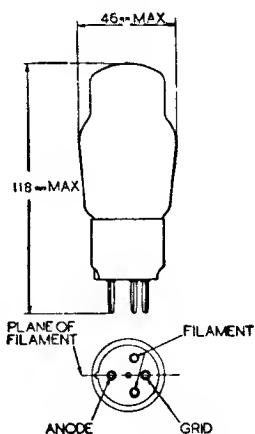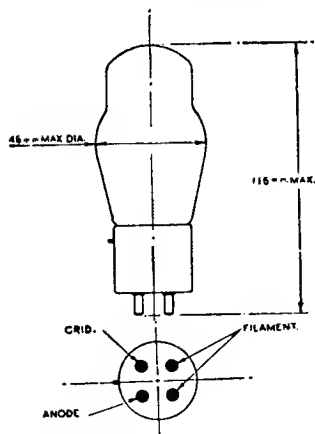

3A/108A
3A/108B

Repeater Triode

3A/108A
3A/108B

