



Repeater Triode

3A/110A

3A/110B

3A/110A

3A/110B

(3A/110A is for replacement purposes only)

CATHODE.

Oxide-coated filament

Current 0.25 A

Nominal voltage 4.0 V

RATING.

Amplification factor } Measured at V_a 130V } 12
 Impedance } V_{g1} -4.5V, I_f 0.25A D.C. } 5,500 ohms

DIRECT INTER-ELECTRODE CAPACITIES.

Grid to anode 9.7 pF

Grid to filament 6.5 pF

Anode to filament 2.5 pF

BASE.

3A/110A American 4-pin bayonet

3A/110B Standard 5-pin British

DIMENSIONS.

Maximum overall length

3A/110A 116 mm.



3A/110B 118 mm.

Maximum bulb diameter 46 mm.

Net weight 44 g.

MAXIMUM RATINGS.

Maximum direct anode voltage 190 V

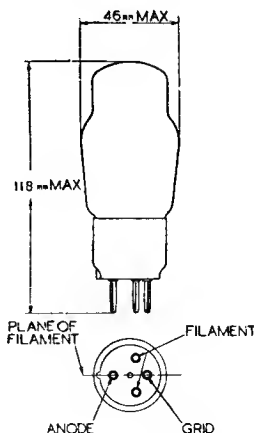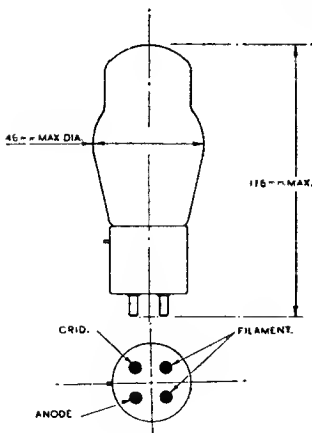

3A/110A
3A/110B

Repeater Triode

3A/110A
3A/110B

