

—Standard Valves—

3B/101-B

VALVE TYPE 3B/101-B

TRIODE.

SPECIFICATION.

Cathode.

Indirectly heated oxide coated.
Constant voltage type.

Base.

Standard British 5-pin.


Dimensions.

Maximum overall length $4\frac{1}{4}"$ (10.8 cms.)
Bulb diameter 1.65" (4.2 cms.)
Net weight 0.11 lbs. (50 gms.)

Constants.

Heater voltage	4 volts
Nominal heater current	1.0 amps.
*Amplification factor	50
*Impedance	10,000 ohms
*Mutual conductance	5.0 mA. per volt
Grid-anode capacity	5.3 $\mu\mu\text{F}$.
Grid-cathode capacity	10.5 $\mu\mu\text{F}$.
Anode-cathode capacity	7.5 $\mu\mu\text{F}$.

* at $V_p = 200$, $V_{g1} = -2$ volts.

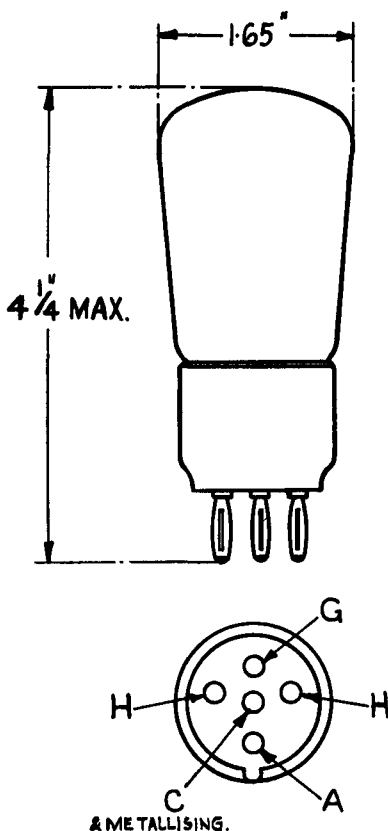


LIMITING CONDITIONS FOR SAFE OPERATION.

Maximum direct anode voltage	200 volts
Maximum direct anode current	25 mA.



—Standard Valves—

TYPICAL OPERATING CONDITIONS.

Anode Voltage Volts	Grid Bias Volts	Anode Current mA.	Load Resistance Ohms	Power Output mW.	Total Harmonics db.
100	—1	2.8	22,000	5	31.5
100	—1	2.8	22,000	10	31
150	—1.5	4.5	28,000	5	32
150	—1.5	4.5	28,000	20	27
200	—2	6.0	34,000	5	34
200	—2	6.0	34,000	20	29
200	—2	6.0	34,000	30	27

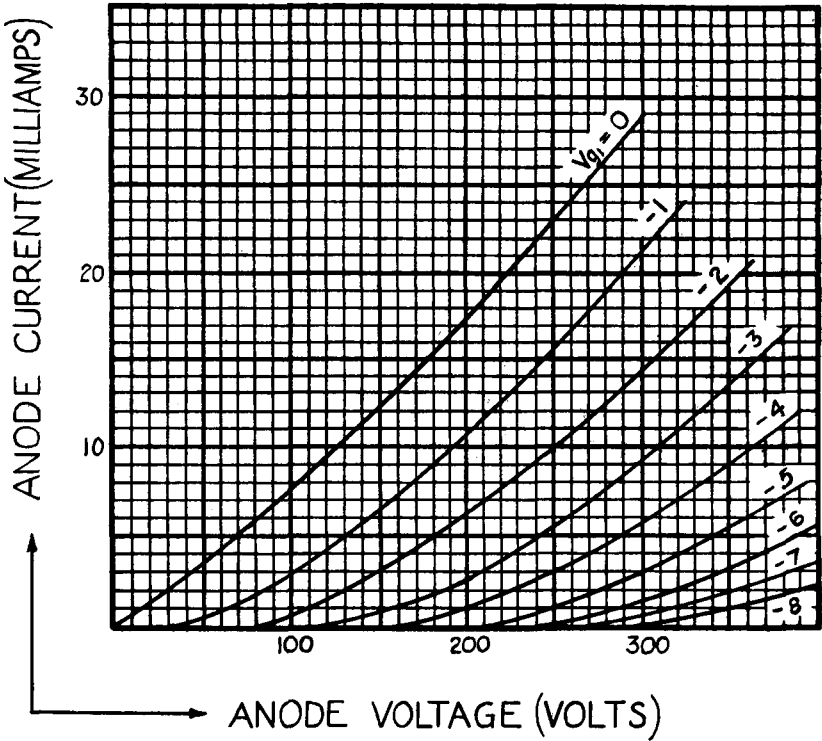

—Standard Valves—

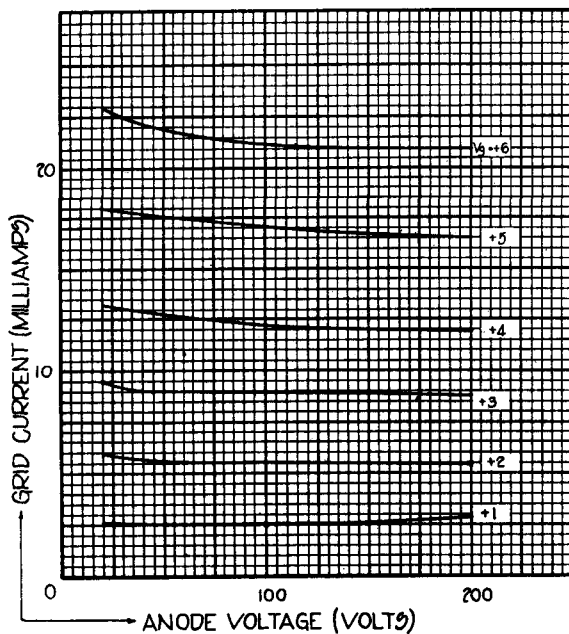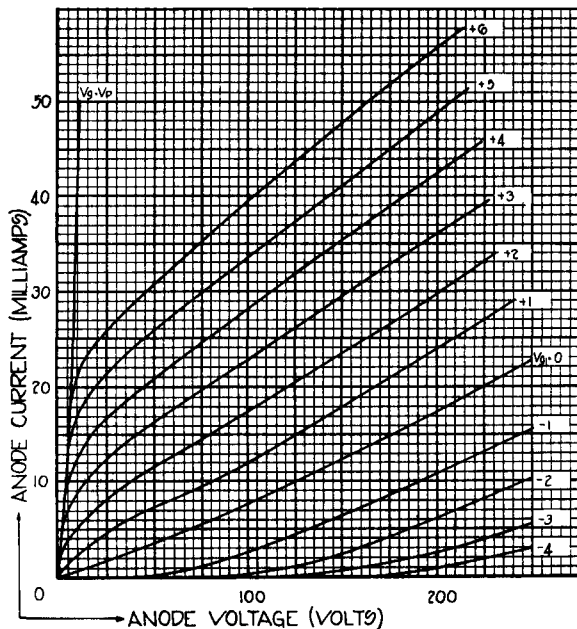

PRINTED IN
ENGLAND