

## TENTATIVE DATA

### QUICK REFERENCE DATA

49cm (19in) rectangular shadow-mask colour television tube incorporating three guns and a metal-backed three-colour phosphor dot screen.

Advanced red phosphor, europium activated.

Increased white brightness.

Unity current ratio for white point  $x=0.281$ ,  $y=0.311$

Temperature compensated shadow-mask maintains purity during warm-up. Shadow-mask optimised for minimum moiré effect on 625 line system.

Reinforced tube envelope-separate safety screen not required.

|                              |               |     |
|------------------------------|---------------|-----|
| Deflection angle             | 90            | deg |
| Focusing                     | Electrostatic |     |
| Light transmission (approx.) | 54            | %   |
| Maximum overall length       | 458           | mm  |

This data should be read in conjunction with GENERAL OPERATIONAL RECOMMENDATIONS - TELEVISION PICTURE TUBES

## HEATER

|                    |     |    |
|--------------------|-----|----|
| $V_h$ (see note 1) | 6.3 | V  |
| $I_h$              | 900 | mA |

The limits of heater voltage and current are contained in General Operational Recommendations - Television Picture Tubes.

## OPERATING CONDITIONS (each gun)

|                                                                     |             |    |
|---------------------------------------------------------------------|-------------|----|
| $V_{a3+a4}$                                                         | 25          | kV |
| $V_{a2}$ (focus electrode control range)                            | 4.2 to 5.0  | kV |
| $V_{a1}$ (at $V_g = -100V$ for visual extinction of focused raster) | 210 to 495  | V  |
| $V_g$ (at $V_{a1} = 300V$ for visual extinction of focused raster)  | -65 to -135 | V  |

\* Light output at screen centre  
(at  $I_{a3+a4} = 750\mu A$ ) 130  $cd/m^2$  (nits)

\* To product white of colour co-ordinates  
 $x=0.281$ ,  $y=0.311$  with a focused  
raster size of  $39.6 \times 31.0cm$

## SCREEN

Metal backed

Phosphor types for separate fluorescent colours:

|                                                                   |                               |                 |
|-------------------------------------------------------------------|-------------------------------|-----------------|
| Red                                                               | Europium activated rare earth |                 |
| Green                                                             | Sulphide                      |                 |
| Blue                                                              | Sulphide                      |                 |
| Useful screen area (approx.)                                      | 1160                          | cm <sup>2</sup> |
| Spacing between centres of adjacent phosphor dot triads (approx.) | 0.63                          | mm              |
| Light transmission (approx.)                                      | 54                            | %               |

## FOCUSING

Electrostatic

## DEFLECTION

Magnetic

|                             |    |     |
|-----------------------------|----|-----|
| Diagonal deflection angle   | 90 | deg |
| Horizontal deflection angle | 79 | deg |
| Vertical deflection angle   | 62 | deg |

## CONVERGENCE

Magnetic

## CAPACITANCES (approx.)

|                        |              |    |
|------------------------|--------------|----|
| $c_{g-all}$ (each gun) | 7.0          | pF |
| $c_{(kR+kG+kB) - all}$ | 15           | pF |
| $c_{kR-all}$           | 5.0          | pF |
| $c_{kG-all}$           | 5.0          | pF |
| $c_{kB-all}$           | 5.0          | pF |
| $c_{a2-all}$           | 7.0          | pF |
| $c_{a3+a4-M}$          | 1500 to 2000 | pF |
| $c_{a3+a4-B}$          | 300          | pF |

## EXTERNAL CONDUCTIVE COATING

This tube has an external conductive coating, M, which must be connected to chassis, and the capacitance of this coating to the final anode is used to provide smoothing for the e.h.t. supply. The electrical connection to this coating must be made within the area specified on the tube outline drawing.

## REFERENCE LINE GAUGE

See page 10.

## MOUNTING POSITION

Any. The tube socket should not be rigidly mounted but should have flexible leads and be allowed to move freely. The bottom circumference of the base shell will fall within a circle of 52.5mm diameter which is centred upon the perpendicular from the centre of the face.

## MAGNETIC SHIELDING

Magnetic shielding must be provided to minimise the effects of extraneous magnetic fields, including the earth's magnetic field. This shielding, in the form of a metal shell extending 22cm over the cone of the tube measured from the centre of the screen, should be constructed of cold-rolled mild steel of 0.5mm minimum thickness. The magnetic shield should be connected to the outer conductive coating. See page 10 for physical dimensions.

## RATINGS (DESIGN CENTRE SYSTEM)

|                                                                 |      |           |
|-----------------------------------------------------------------|------|-----------|
| $V_{a3+a4}$ max. (absolute rating) (see notes 2 and 3)          | 27.5 | kV        |
| $V_{a3+a4}$ min. (absolute rating) (see note 4)                 | 20   | kV        |
| $I_{a3+a4}$ (long term average max. for three guns: see note 5) | 750  | $\mu A$   |
| $V_{a2}$ max. (see note 3)                                      | 6.0  | kV        |
| $v_{a1}$ (pk) max.                                              | 1.0  | kV        |
| $-V_g$ max.                                                     | 400  | V         |
| $V_g$ max.                                                      | 0    | V         |
| $V_{h-k}$ max. (see note 6)                                     |      |           |
| Cathode positive                                                |      |           |
| d.c. max.                                                       | 250  | V         |
| pk max.                                                         | 300  | V         |
| Cathode negative                                                |      |           |
| d.c. max.                                                       | 135  | V         |
| pk max.                                                         | 180  | V         |
| $R_{g-k}$ max.                                                  | 750  | $k\Omega$ |

# EQUIPMENT DESIGN VALUES (each gun if applicable)

Valid for  $V_{a3+a4} = 20$  to  $27.5\text{ kV}$

|          |                            |
|----------|----------------------------|
| $V_{a2}$ | 16.8 to 20% of $V_{a3+a4}$ |
| $V_{a1}$ | see page 14                |
| $V_g$    | see page 14                |

Variation in cut-off voltage between guns Minimum value is at least 65% of the maximum value.

|                       |            |               |
|-----------------------|------------|---------------|
| $I_{a2}$              | -15 to +15 | $\mu\text{A}$ |
| $I_{a1}$              | -5 to +5   | $\mu\text{A}$ |
| $I_g$ at $V_g = -150$ | -5 to +5   | $\mu\text{A}$ |

|                            |   |       |       |       |   |
|----------------------------|---|-------|-------|-------|---|
| To produce white of colour | x | 0.310 | 0.265 | 0.281 | ← |
| co-ordinates:              | y | 0.316 | 0.290 | 0.311 |   |

Percentage of total anode current supplied by each gun (typical) ←

|           |      |      |      |   |
|-----------|------|------|------|---|
| Red gun   | 43.5 | 27.9 | 32.2 | % |
| Green gun | 30.0 | 34.9 | 35.6 | % |
| Blue gun  | 26.5 | 37.2 | 32.2 | % |

Ratio of cathode currents ←

|                      |      |      |      |      |
|----------------------|------|------|------|------|
| Red gun to green gun | min. | 1.05 | 0.60 | 0.65 |
|                      | av.  | 1.45 | 0.80 | 0.90 |
|                      | max. | 2.00 | 1.10 | 1.25 |
| Red gun to blue gun  | min. | 1.20 | 0.55 | 0.75 |
|                      | av.  | 1.65 | 0.75 | 1.00 |
|                      | max. | 2.25 | 1.05 | 1.35 |

Maximum electron beam shift required from purity magnets  $\pm 0.11$  mm

Maximum required raster shift  $\pm 12$  mm

Maximum lateral convergence shift of blue beam with respect to the converged red and green beams  $\pm 5.5$  mm

Maximum radial convergence shift, excluding effects of dynamic convergence (each beam, see note 8)  $\pm 8.0$  mm

## WEIGHT



Tube alone (approx.) 11 kg

## NOTES

1. For maximum cathode life, it is recommended that the heater supply be regulated at 6.3V.
2. The tube does not emit X-radiation above the internationally accepted maximum dosage rate if it is operated from an e.h.t. source supplying an absolute maximum voltage of 27.5kV at zero beam current and with an internal impedance  $\geq 500\text{k}\Omega$ .
3. Adequate precautions should be taken to ensure that the receiver is protected from damage which may be caused by a possible high voltage flashover within the cathode ray tube. In view of the high voltage on a2, adequate precautions should be taken to ensure freedom from flashover on all connections to this electrode.
4. Operation at lower voltages impairs brightness and resolution and may have a detrimental effect on colour purity.
5. The limiting value "long term average maximum current" of  $750\mu\text{A}$  will be met provided a device is incorporated in the circuit to limit the short term average current to 1.1mA.
6. In order to avoid excessive hum the a.c. component of  $V_{h-k}$  should be as low as possible ( $< 20\text{V r.m.s.}$ ).

During an equipment warm-up period not exceeding 15 seconds  $v_{h-k}$  (pk) max. (cathode positive) is allowed to rise to 410V. Between 15 and 45 seconds after switching on a decrease in  $v_{h-k}$  (pk) max. (cathode positive) proportional with time from 410 to 250V is permissible.

7. The metal band (B) should be connected directly to the chassis in an a.c. receiver operating from an isolating transformer, or via a suitable leakage path in an a.c./d.c. receiver.
8. The dynamic convergence to be effected by currents of approximately parabolic waveshape synchronised with scanning.

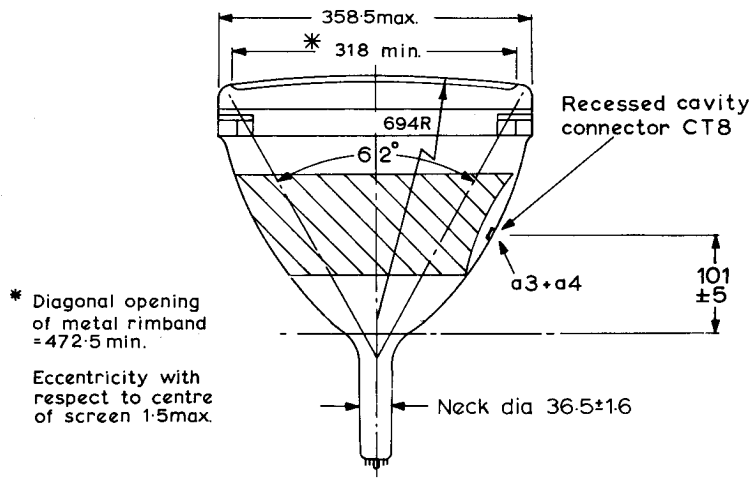
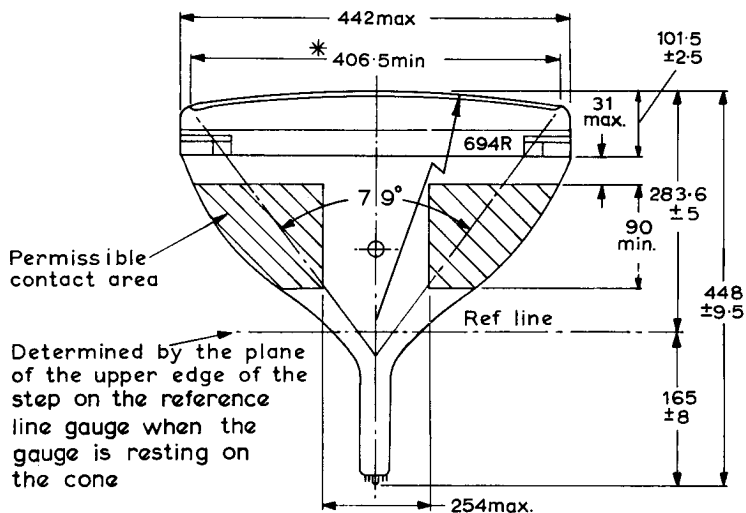


\* Diagonal opening of metal rimband = 472.5 min.

Eccentricity with respect to centre of screen 1.5 max.


All dimensions in mm

[B7414]

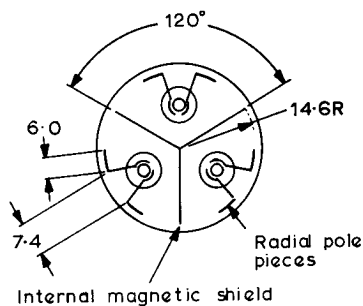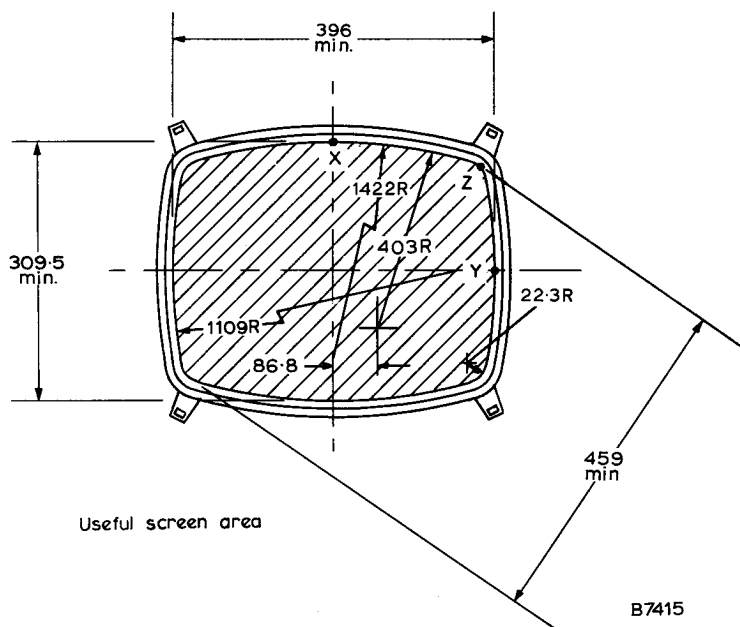


Location of radial convergence  
pole pieces viewed from  
screen end of guns

All dimensions in mm

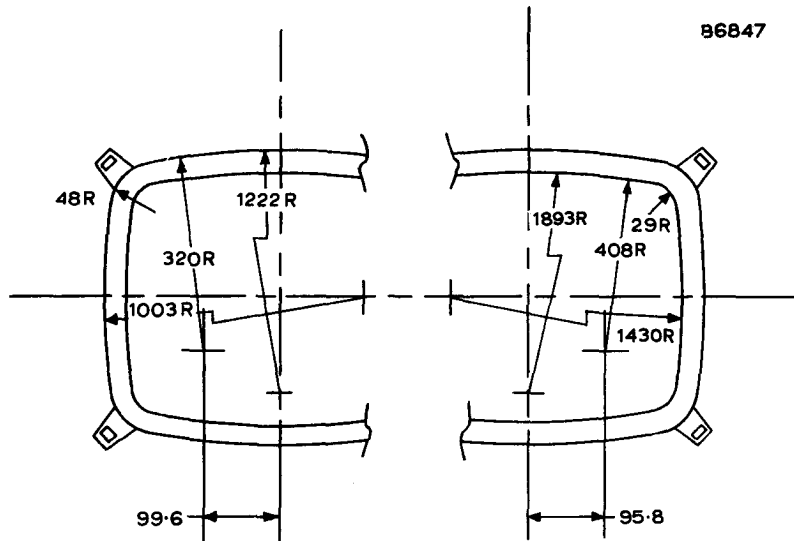


Dimensions of metal band

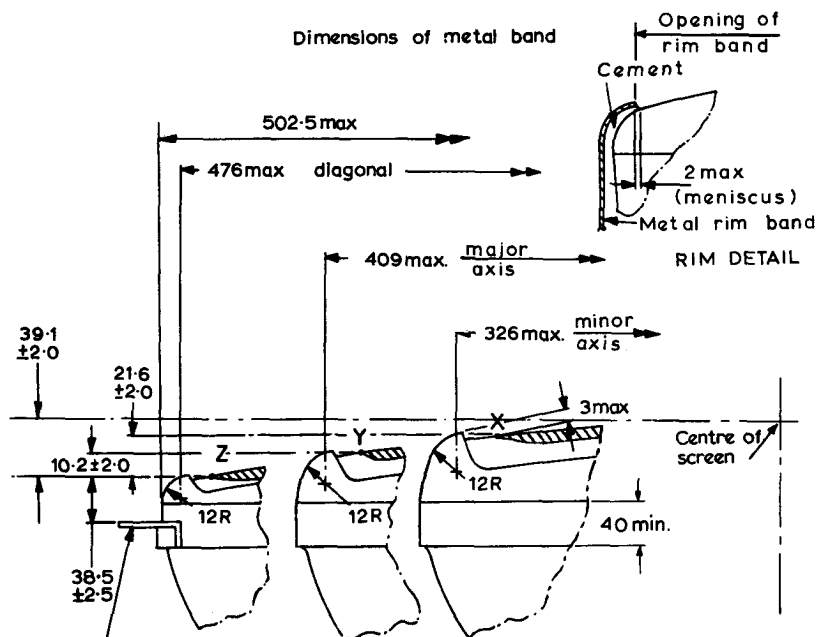

One of the four lugs may deviate 2mm max. from the plane through the three other lugs. This deviation is incorporated in the  $\pm 2.5$  tolerance.


All dimensions in mm

B7416

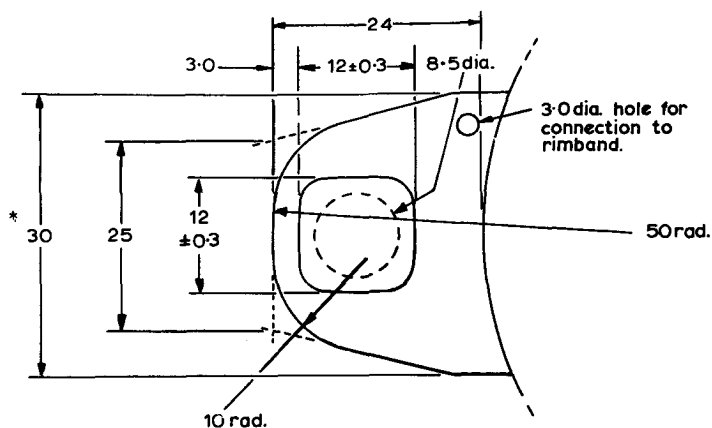


\* Minimum space to be reserved for mounting lugs = 37mm.  
Mounting lug

B7746

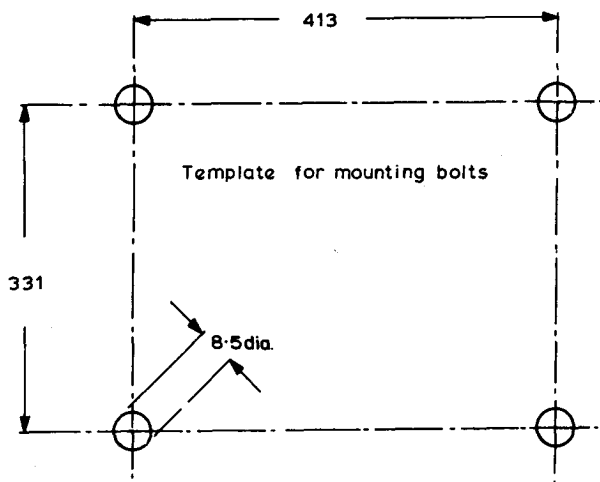


The bolts to be used for mounting the tube must be within the circles of 8.5mm diameter shown in the template drawing.

All dimensions in mm

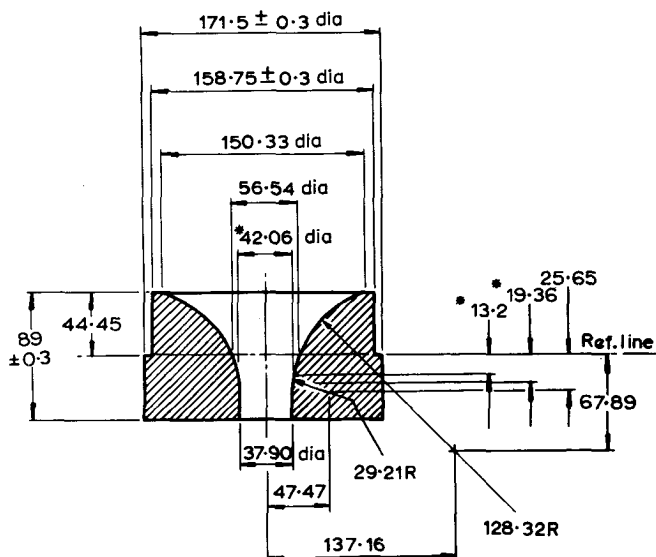


Reference line gauge


\* These dimensions define extent of 29.21R

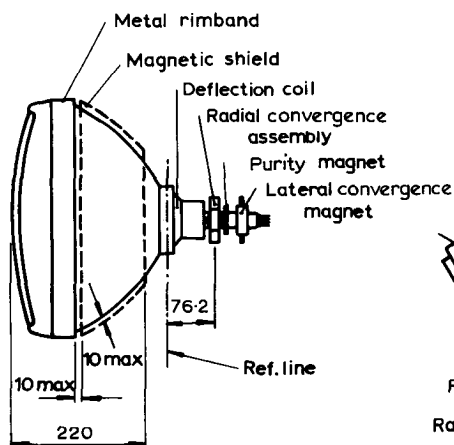


Outline of tube with components

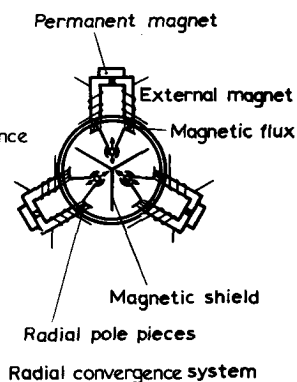


All dimensions in mm

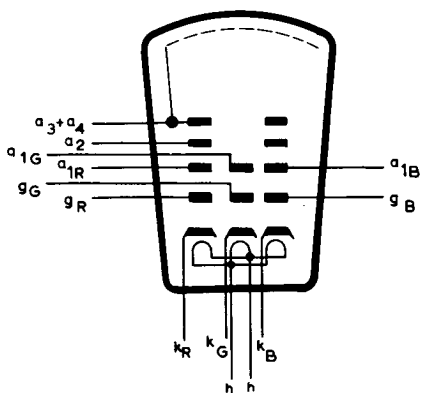


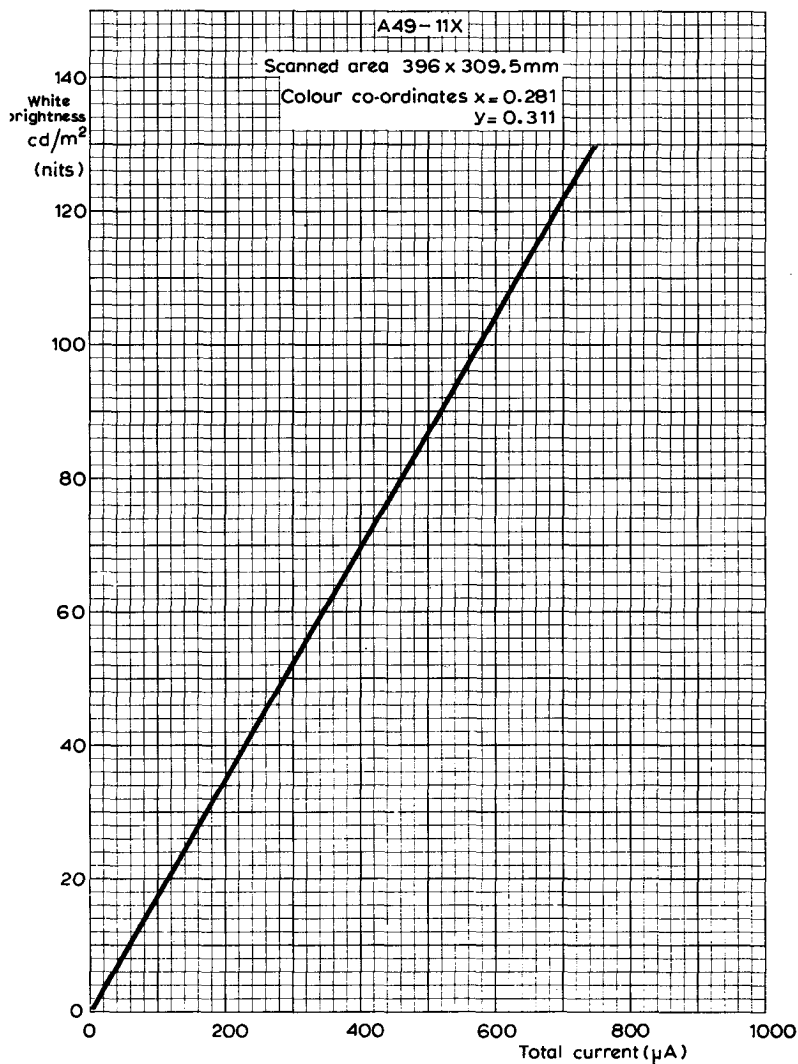


BRIGHTNESS AT CENTRE OF SCREEN PLOTTED AGAINST TOTAL CURRENT  
FOR WHITE OF COLOUR COORDINATES  $x = 0.281$ ,  $y = 0.311$

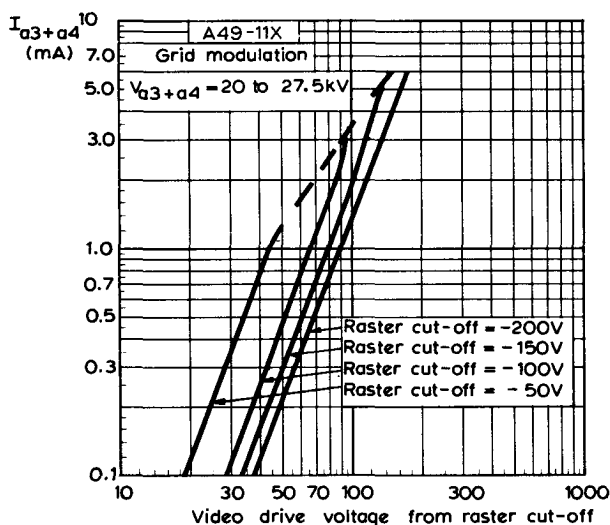

FINAL ANODE CURRENT PLOTTED AGAINST GRID VOLTAGE  
GRID MODULATION

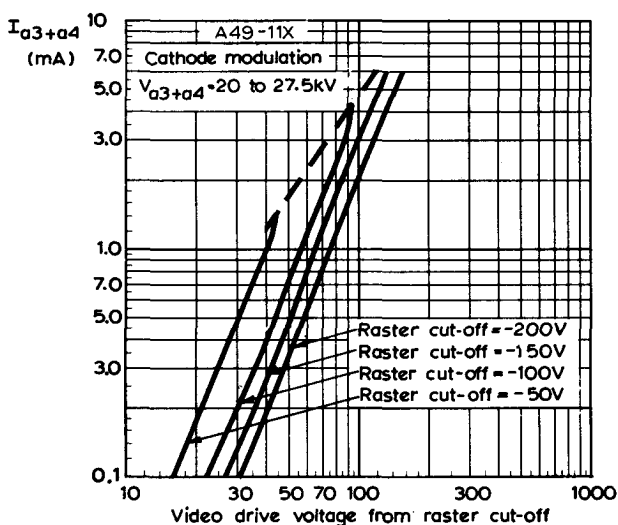

FINAL ANODE CURRENT PLOTTED AGAINST CATHODE-TO-GRID  
VOLTAGE. CATHODE MODULATION

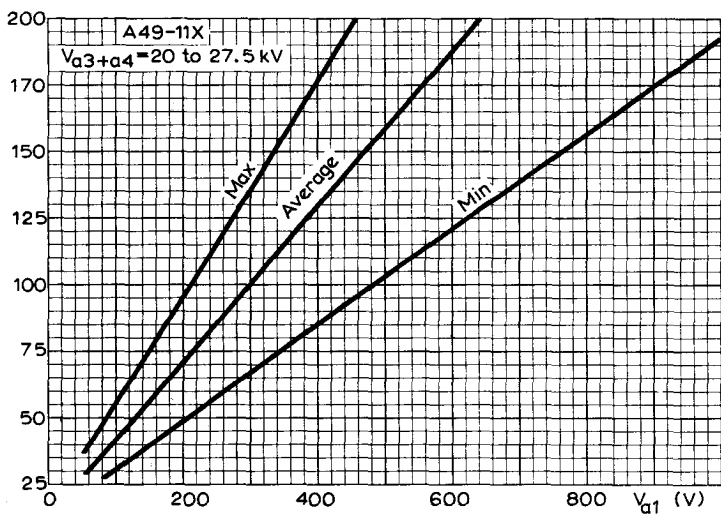

CUT-OFF DESIGN CHART