

PHILIPS „MINIWATT“

Heizspannung			
Tension de chauffage	V_f	=	ca. 20 V
Filament voltage			appr.

Heizstrom			
Courant de chauffage	I_f	=	0,180 A
Filament current			

	V_a	=	200 V
	V_{g^4}	=	-3 V
Elektrodenspannungen	V_{g^3}	=	200 V
Tensions d'électrodes	V_{g^2}	=	100 V
Electrode voltages	V_{g^1}	=	-1,5 V

Elektrodenströme	I_a	=	3 mA
Courants d'électrodes	I_{g^3}	=	7 mA
Electrode currents			

Max. Länge			
Longueur max.	l	=	130 mm
Overall length			

Grösster Durchmesser			
Diamètre max.	d	=	50 mm
Max. diameter			

Sockel			
Culot		=	C 35
Base			

Sockelschaltung			
Connexion du culot		=	S XVII
Base connection			

Anwendung:	Oszillator-Modulator
Application:	Oscillateur-modulateur
Function:	Oscillator-modulator



PHILIPS „MINIWATT“


	V_{ao}	= 250 V
	V_{aR}	= 250 V
	V_{aL}	= 200 V
Max. Elektroden Spannungen	V_{g3o}	= 250 V
Tensions d'électrodes max.	V_{g3R}	= 200 V
Max. electrode voltages	V_{g3L}	= 200 V
	V_{g2o}	= 175 V
	V_{g2}	= 120 V
Max. Elektroden Belastungen	W_a	= > 1 W
Dissipations d'électrodes max.	W_{g3}	= > 2 W
Max. electrode dissipations	W_{g2}	= 0,4 W
Max. Kathodenstrom		
Courant cathodique max.	I_c	= 15 mA
Max. cathode current		
Mittlerer Schirmgitterstrom		ca.
Courant de grille-écran moyen	I_{g2}	= env. 1,8 m
Average screen-grid current		appr.
Gitterstrom-Einsatzpunkt	V_{g4i}	= -1,3 V
Point de commenc. du courant de grille	V_{g1i}	= -1,3 V
Starting point of grid current		
Max. Spann. zwischen Faden und Kath.	V_{fc}	= 100 V
Tension max. entre filament et cathode		
Max. voltage between filam. and cathode		
	C_{g1g3}	ca.
		= env. 0,015
		appr.
Kapazitäten	C_a	= 12,5 $\mu\mu F$
Capacités	C_{g1}	= 7 $\mu\mu F$
Capacities	$C_{g3} + g4$	= 11,5 $\mu\mu F$

I_a (mA)

**PHILIPS
MINIWATT
B 2048**

$I_f = 180 \text{ mA}$
 $V_{g_2} = 100 \text{ V}$
 $V_{g_3} = 200 \text{ V}$
 $V_{g_1} = -1.5 \text{ V}$

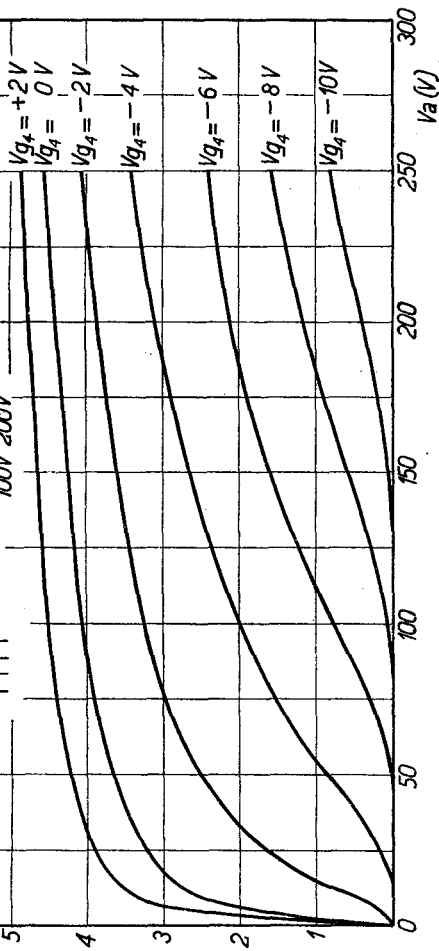

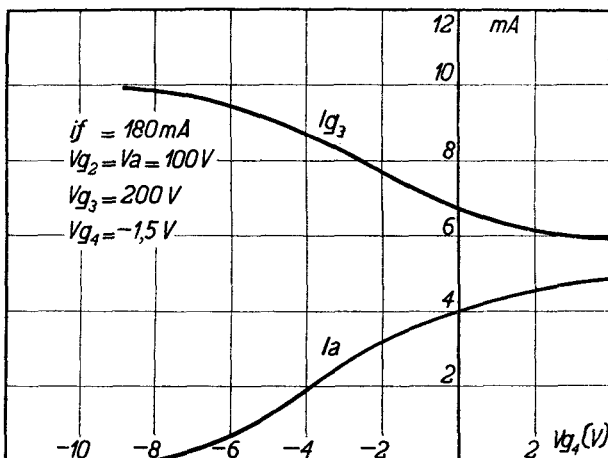

**PHILIPS
MINIWATT
B2048**

