

R.F. Pentode for use in battery operated receivers.

FILAMENT

Suitable for d.c. operation only

V_f	1.25	V
I_f	25	mA

CAPACITANCES

C_{a-g1}	< 0.01	pF
C_{in}	3.1	pF
C_{out}	3.6	pF

CHARACTERISTICS

V_a	45	67.5	V
V_{g2}	45	67.5	V
V_{g1}	0	0	V
I_a	0.8	1.7	mA
I_{g2}	200	450	μA
g_m	750	950	$\mu A/V$
r_a	1.4	1.6	M Ω
I_{g1-g2}	21	21	
V_{g1} (for 100:1 reduction in g_m)	-2.6	-4.0	V
R_{in} ($f=50Mc/s$)	—	57	k Ω
R_{eq}	—	10	k Ω

OPERATING CONDITIONS AS A FREQUENCY CHANGER

V_a	45	67.5	V
V_{g2}	45	67.5	V
R_{g1-f}	100	100	k Ω
I_a	0.6	1.35	mA
I_{g2}	140	400	μA
$V_{osc(r.m.s.)}$	3.0	4.0	V
I_{g1}	30	30	μA
g_c	220	290	$\mu A/V$
$g_m(eff)$	300	450	$\mu A/V$
r_a	1.4	2.0	M Ω

LIMITING VALUES


V_a max.	90	V
$V_{g2(b)}$ max.	90	V
V_{g2} max.	67.5	V
I_k max.	2.5	mA
$V_{g1}(I_{g1} = +0.3\mu A)$	> 0	V

DF61


SUBMINIATURE R.F. PENTODE

R.F. Pentode for use in battery operated receivers.

2926

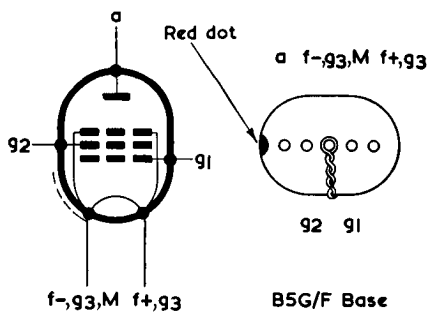

g₃ consists of two plates one being connected to lead 3 and the other to lead 5

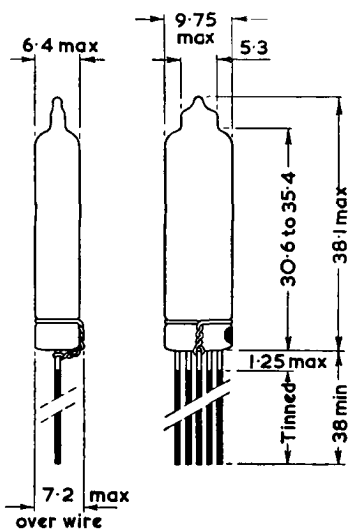

All dimensions in mm