



3RP1-A

3RP1-A

OSCILLOGRAPH TUBE

ELECTROSTATIC FOCUS

ELECTROSTATIC DEFLECTION

DATA

General:

Heater, for Unipotential Cathode:

Voltage 6.3 ac or dc volts
 Current $0.6 \pm 10\%$ amp

Direct Interelectrode Capacitances (Approx.):

Grid No.1 to all other electrodes 8 μf
 Deflecting electrode DJ₁ to
 deflecting electrode DJ₂ 2 μf
 Deflecting electrode DJ₃ to
 deflecting electrode DJ₄ 2 μf
 DJ₁ to all other electrodes 11 μf
 DJ₂ to all other electrodes 8 μf
 DJ₃ to all other electrodes 7 μf
 DJ₄ to all other electrodes 8 μf

Faceplate Flat Clear Glass

Phosphor (For Curves, see front of this Section). P1

Fluorescence. Green

Phosphorescence Green

Persistence Medium

Focusing Method Electrostatic

Deflection Method Electrostatic

Overall Length. 9-1/8" $\pm$ 1/4"Greatest Diameter of Bulb 3" $\pm$ 1/16"

Minimum Useful Screen Diameter. 2-3/4"

Mounting Position Any

Weight (Approx.). 12 oz

Bulb. J-24S1

Base. Small-Shell Duodecal 10-Pin (JETEC No.B10-75),
 or Small-Shell Duodecal 12-Pin (JETEC No.B12-43)

Basing Designation for BOTTOM VIEW. 12E

Pin 1 - Heater

Pin 2 - Grid No.1

Pin 3 - Cathode

Pin 4 - Grid No.3

Pin 5[▲] - Internal
 Connection-
 Do Not Use

Pin 6 - Deflecting
 Electrode
 DJ₃

Pin 7 - Deflecting
 Electrode
 DJ₄

Pin 8 - Ultor


(Grid No.2,
 Grid No.4,
 Collector)

Pin 9 - Deflecting
 Electrode
 DJ₂

Pin 10 - Deflecting
 Electrode
 DJ₁

Pin 11[▲] - Internal
 Connection-
 Do Not Use

Pin 12 - Heater

*DJ₁ and DJ₂ are nearer the screen**DJ₃ and DJ₄ are nearer the base*[▲] Pins 5 and 11 are omitted from the 10-pin base.

JULY 1, 1955

TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

TENTATIVE DATA 1



3RP1-A OSCILLOGRAPH TUBE

With DJ_1 positive with respect to DJ_2 , the spot is deflected toward pin 4. With DJ_3 positive with respect to DJ_4 , the spot is deflected toward pin 1.

The plane through the tube axis and pin 1 may vary from the trace produced by DJ_3 and DJ_4 by 10° (measured about the tube axis).

The angle between $DJ_1 - DJ_2$ trace and $DJ_3 - DJ_4$ trace is $90^\circ \pm 3^\circ$.

Maximum Ratings, Design-Center Values:

ULTOR ^o VOLTAGE	2500 max.	volts
ULTOR INPUT (AVERAGE)	6 max.	watts
GRID-No.3 VOLTAGE	1000 max.	volts
GRID-No.1 VOLTAGE:		
Negative bias value	200 max.	volts
Positive bias value	0 max.	volts
Positive peak value	2 max.	volts
PEAK VOLTAGE BETWEEN ULTOR AND		
ANY DEFLECTING ELECTRODE	500 max.	volts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode.	125 max.	volts
Heater positive with respect to cathode.	125 max.	volts

Equipment Design Ranges:

For any ultor voltage (E_{c4}) between 500* and 2500 volts

Grid-No.3 Voltage		
for Focus	16.5% to 31% of E_{c4}	volts
Maximum Grid-No.1		
Voltage for Visual		
Extinction of Un-		
deflected Focused		
Spot	-6.75% of E_{c4}	volts
Grid-No.3 Current for		
Any Operating Con-		
dition		
	-15 to +10	μ amp
Deflection Factor:		
DJ_1 & DJ_2	73 to 99	v dc/in./kv of E_{c4}
DJ_3 & DJ_4	52 to 70	v dc/in./kv of E_{c4}
Spot Position	##	

^o The "ultor" in a cathode-ray tube is the electrode to which is applied the highest dc voltage for accelerating the electrons in the beam prior to its deflection. In the 3RP1-A, the ultor function is performed by grid No.4. Since grid No.4, grid No.2, and collector are connected together within the 3RP1-A, they are collectively referred to simply as "ultor" for convenience in presenting data and curves.

* Brilliance and definition decrease with decreasing ultor voltage. A value as low as 500 volts is recommended only for low-velocity deflection and low ambient-light levels.

The center of the undeflected focused spot will fall within a circle having 7.5-mm radius concentric with the center of the tube face.



3RPI-A

OSCILLOGRAPH TUBE

3RPI-A


Examples of Use of Design Ranges:

For ultor voltages of	1000	2000	volts
Grid-No.3 Voltage			
for Focus.	165 to 310	330 to 620	volts
Maximum Grid-No.1			
Voltage for Visual			
Extinction of Un-			
deflected Focused			
Spot	-67.5	-135	volts
Deflection Factors:			
DJ1 & DJ2.	73 to 99	146 to 198	volts dc/in.
DJ3 & DJ4.	52 to 70	104 to 140	volts dc/in.

Maximum Circuit Values:

Grid-No.1-Circuit Resistance	1.5 max.	megohms
Resistance in Any Deflecting-		
Electrode Circuit	5 max.	megohms

■ It is recommended that the deflecting-electrode circuit resistances be approximately equal.

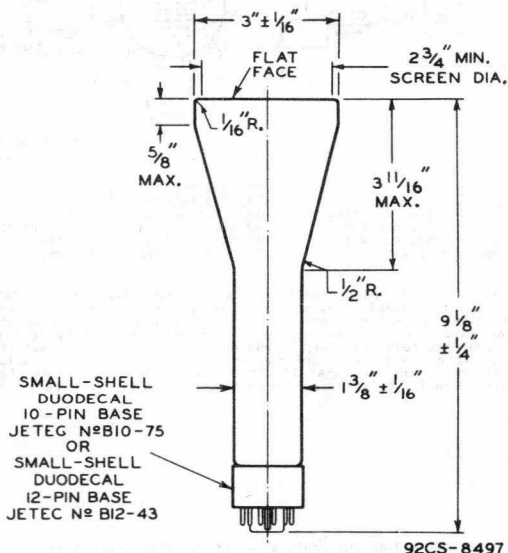

CENTER LINE OF BULB WILL NOT DEVIATE MORE THAN 2° IN ANY DIRECTION FROM PERPENDICULAR ERECTED AT CENTER OF BOTTOM OF BASE.

JULY 1, 1955

TUBE DIVISION

TENTATIVE DATA 2

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


3RP1-A



3RP1-A

OSCILLOGRAPH TUBE

TYPICAL OSCILLOGRAPH CIRCUIT

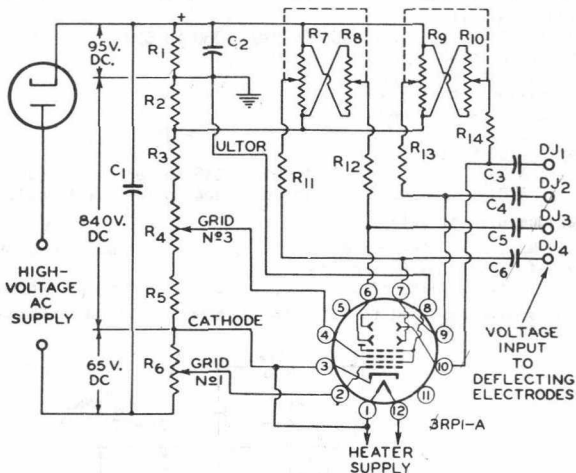

92CS-6777R1

C1: 0.2 μ f
 C2: 1.0 μ f
 C3 C4 C5 C6: 0.05- μ f Blocking
 Capacitors
 R1 R2: 2.5 Megohms, 0.5 Watt
 R3: 2.5 Megohms, 1 Watt

R4: 1.0-Megohm Potentiometer
 R5: 0.5 Megohm, 0.5 Watt
 R6: 0.35 Megohm, 0.5 Watt
 R7 R8: Dual 5-Megohm Potentiometer
 R9 R10: Dual 5-Megohm Potentiometer
 R11 R12 R13 R14: 2 Megohms, 0.5 Watt


* When cathode is grounded, capacitors should have high voltage rating; when ultor is grounded, they may have low voltage rating. For dc amplifier service, deflecting electrodes should be connected direct to amplifier output. In this service, it is preferable usually to remove deflecting-electrode resistors to minimize loading effect on amplifier. In order to minimize spot defocusing, it is essential that ultor be returned to a point in the amplifier system which will give the lowest possible potential difference between ultor and the deflecting electrodes.

Devices and arrangements shown or described herein may use patents of RCA or others. Information contained herein is furnished without responsibility by RCA for its use and without prejudice to RCA's patent rights.



3RPI-A

3RPI-A CHARACTERISTICS

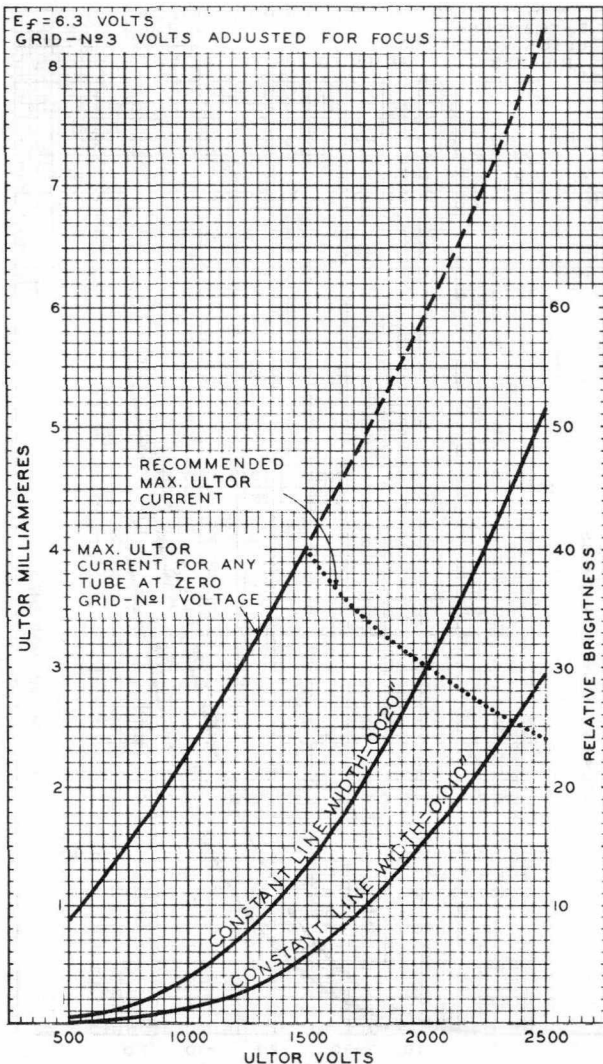

MAR. 24, 1955

TUBE DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-7143RI

3RP1-A



3RP1-A

AVERAGE CHARACTERISTICS

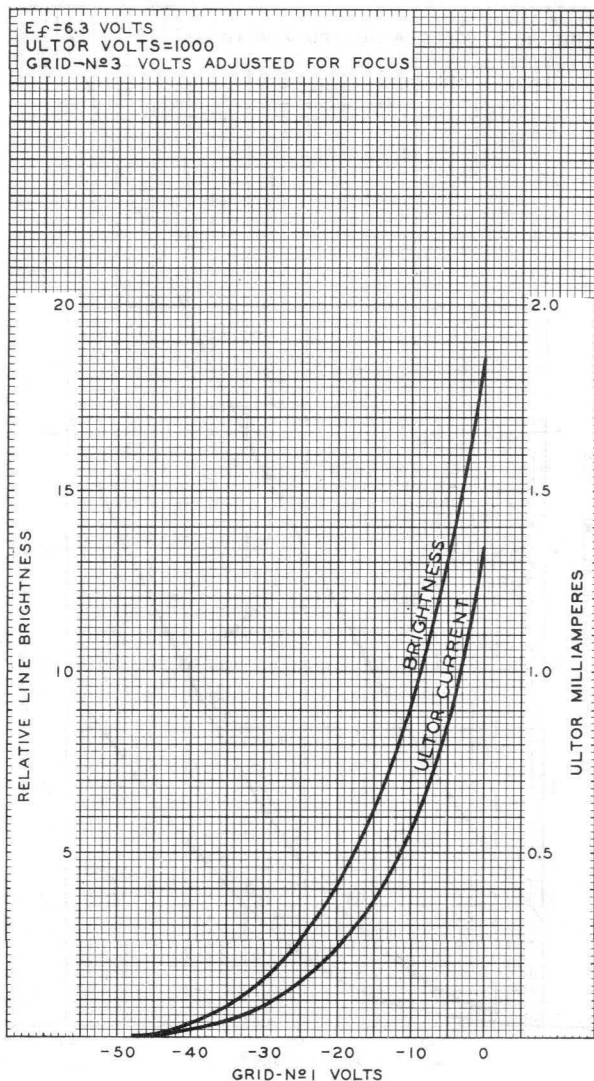

MAR. 24, 1955

TUBE DIVISION
 RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-714IR1