

SUBMINIATURE V.H.F. OUTPUT PENTODE

DL70

*Subminiature output pentode suitable for
v.h.f. applications in battery-operated equipment.*

This valve is primarily intended for use in communications equipment of the 'push to talk' type and its continuous life rating under typical supply voltage conditions is relatively short and is chiefly a function of hours of filament operation and filament temperature.

Under 'push to talk' conditions an operating life of about 200 hours may be expected.

FILAMENT

Suitable for d.c. operation only.

V_f	1.25	V
I_f	110	mA

MOUNTING POSITION

Any

Note – Direct soldered connections to the leads of this valve must be at least 5mm from the seal and any bending of the valve leads must be at least 1.5mm from the seal.

If the valve is used with an earthed metal clip a decrease in output power of approximately 10% can be expected up to 200Mc/s.

CAPACITANCES

	Shielded	Unshielded
C_{a-g1}	<0.1	0.08 pF
C_{in}	3.0	3.1 pF
C_{out}	5.6	3.9 pF

CHARACTERISTICS

V_{a1}	135	V
V_{g2}	90	V
I_a	7.5	mA
I_{g2}	1.5	mA
V_{g1}	-7.5	V
g_m	1.9	mA/V
r_a	150	kΩ
$ Z_{g1-g2} $	6.5	

OPERATING CONDITIONS AS A CLASS 'C' TELEGRAPHY R.F. OSCILLATOR

f	10	50	Mc/s
V_{a1}	150	150	V
V_{g2}	110	110	V
I_a	10	10	mA
I_{g2}	3.0	3.0	mA
I_{g1}	40	40	μA
R_{g1}	470	390	kΩ
P_{load}	800	800	mW
η_{load}	53	53	%
$v_a(pk)$	120	—	V
$v_{g1(pk)}$	23	—	V



*Subminiature output pentode suitable for
v.h.f. applications in battery-operated equipment.*

OPERATING CONDITIONS AS A CLASS 'C' TELEGRAPHY R.F. AMPLIFIER

f	50	200	Mc/s
V _a	150	150	V
V _{g2}	110	110	V
V _{g1}	-22	-22	V
I _a	9.7	10.5	mA
I _{g2}	3.2	2.5	mA
I _{g1}	80	60	μA
P _{load}	820	450	mW
η _{load}	56	29	%

P_{drive} measured at the control-grid is approximately 50mW at f=200Mc/s and does not include the power lost in the grid tuned circuit.

OPERATING CONDITIONS AS A FREQUENCY MULTIPLIER

Doubler

f _{out}	50	50	100	100	Mc/s
V _a	90	150	90	150	V
V _{g2}	90	110	90	110	V
V _{g1}	-32	-40	-32	-40	V
I _a	4.3*	9.4	4.7*	9.9	mA
I _{g2}	1.5	3.4	1.3	3.0	mA
I _{g1}	13	140	8.0	90	μA
P _{load}	180	590	150	510	mW
η _{load}	47	42	36	34	%

Trebler

f _{out}	50	50	100	100	Mc/s
V _a	90	150	90	150	V
V _{g2}	90	110	90	110	V
V _{g1}	-60	-70	-60	-70	V
I _a	4.4*	9.3	4.6*	9.7	mA
I _{g2}	1.6	3.4	1.4	3.1	mA
I _{g1}	30	24	24	190	μA
P _{load}	140	420	120	360	mW
η _{load}	35	30	29	25	%

Quadrupler

f _{out}		50	50	Mc/s
V _a		90	150	V
V _{g2}		90	110	V
V _{g1}		-65	-80	V
I _a		4.5*	6.2	mA
I _{g2}		1.5	1.8	mA
I _{g1}		32	27	μA
P _{load}		100	220	mW
η _{load}		25	24	%

*For class 'C' r.f. operation at V_a ≤ 90V, I_k max. = 6.0mA.



SUBMINIATURE V.H.F. OUTPUT PENTODE

DL70

*Subminiature output pentode suitable for
v.h.f. applications in battery-operated equipment.*

OPERATING CONDITIONS AS SINGLE VALVE CLASS 'A' AMPLIFIER

V_a	45	67.5	90	120	135	V
V_{g2}	45	67.5	90	120	90	V
V_{g1}	-2.9	-3.8	-6.5	-12	-7.5	V
I_a	3.0	7.5	9.0	8.0	7.5	mA
$I_{g2(0)}$	0.8	1.8	2.1	1.8	1.5	mA
$I_{g2(max. sig.)}$	1.2	2.7	3.1	3.0	2.5	mA
R_a	12	6.5	7.0	13	16	k Ω
$V_{in(r.m.s.)}$ ($P_{out}=50mW$)	1.9	1.5	1.5	1.3	1.1	V
P_{out}	58	190	360	460	500	mW
$V_{in(r.m.s.)}$	2.2	3.4	4.7	4.7	4.0	V
D_{tot}	10	10	10	10	10	%

OPERATING CONDITIONS FOR TWO VALVES IN CLASS 'AB' PUSH-PULL

V_{a-e}	90	150	V
V_{g2-e}	90	120	V
$I_{a(0)}$	2×6.5	2×6.3	mA
$I_a(max. sig.)$	2×7.6	2×7.95	mA
$I_{g2(0)}$	2×1.5	2×1.4	mA
$I_{g2(max. sig.)}$	2×2.6	2×2.65	mA
R_k	390	680	Ω
R_{a-a}	11	18	k Ω
$V_{in(g1-g1)r.m.s.} (P_{out}=50mW)$	2.8	4.2	V
P_{out}	0.65	1.35	W
$V_{in(g1-g1)r.m.s.}$	14.5	11.3	V
D_{tot}	5.7	4.7	%

LIMITING VALUES


V_a max.	150	V
p_a max.	1.0	W
V_{g2} max.	150	V
p_{g2} max.	450	mW
R_{g1-f} max.	2.2	M Ω
V_f max. (absolute)	1.35	V
V_{g1} max.:—r.f. amplifier	-25	V
frequency doubler	-40	V
frequency trebler	-70	V
frequency quadrupler	-80	V
I_k max.:—	13	mA
frequency quadrupler ($V_a \geq 90V$)	8.0	mA




DL70

SUBMINIATURE V.H.F. OUTPUT PENTODE

*Subminiature output pentode suitable for
v.h.f. applications in battery-operated equipment.*




3230



B 8D/F Base


All dimensions in mm

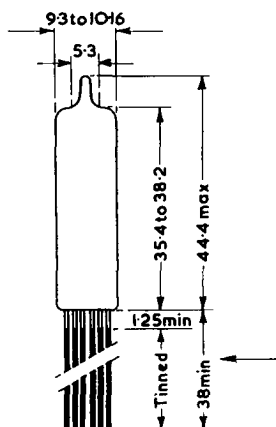

SUBMINIATURE V.H.F. OUTPUT PENTODE

DL70

Subminiature output pentode suitable for
v.h.f. applications in battery-operated equipment.

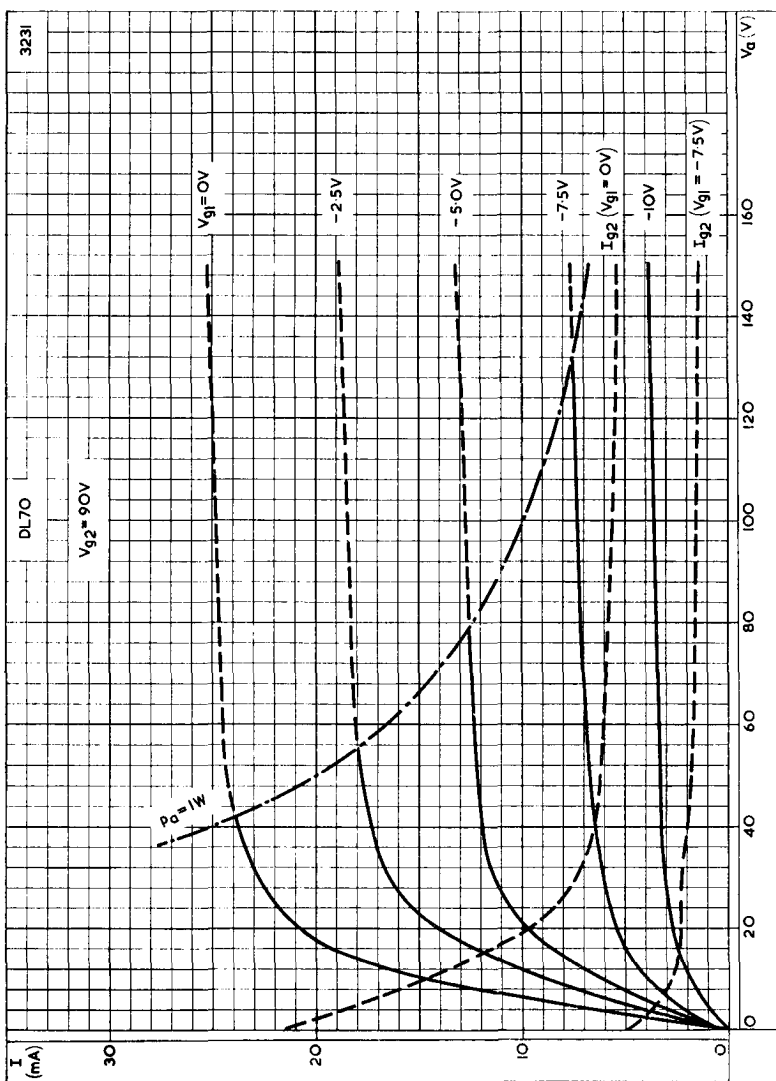


ANODE AND SCREEN-GRID CURRENTS PLOTTED AGAINST ANODE VOLTAGE WITH CONTROL-GRID VOLTAGE AS PARAMETER. $V_{g2} = 90V$

DL70

SUBMINIATURE V.H.F. OUTPUT PENTODE

*Subminiature output pentode suitable for
v.h.f. applications in battery-operated equipment.*

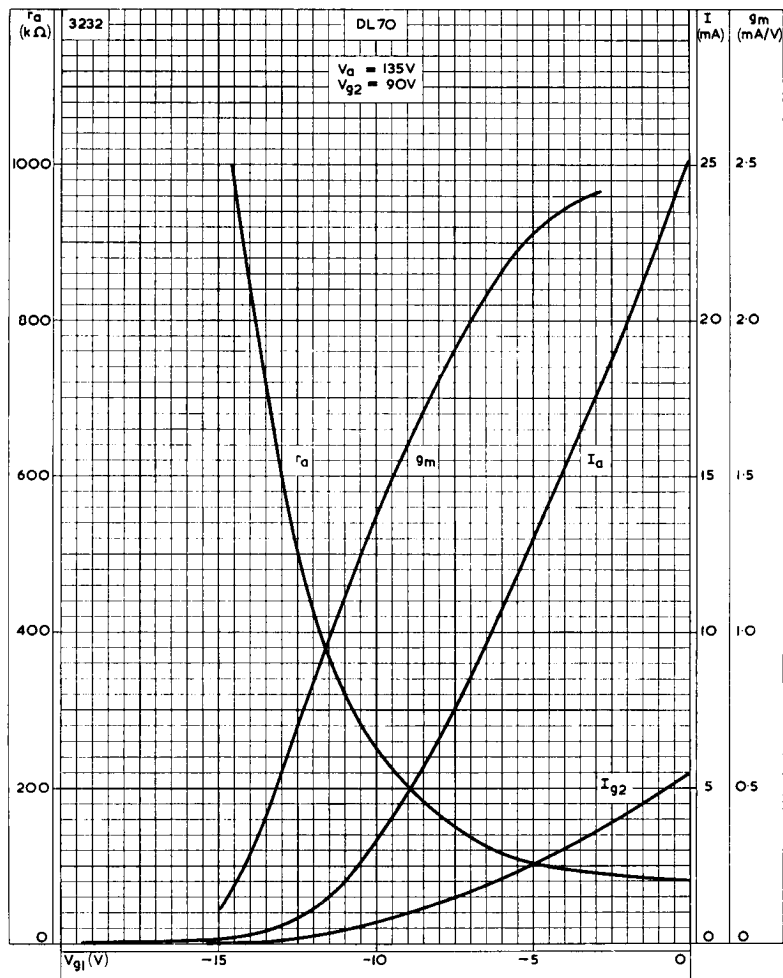


ANODE AND SCREEN-GRID CURRENTS, MUTUAL CONDUCTANCE AND
ANODE IMPEDANCE PLOTTED AGAINST CONTROL-GRID VOLTAGE

$V_a = 135V$, $V_{g2} = 90V$

SUBMINIATURE V.H.F. OUTPUT PENTODE

DL70

Subminiature output pentode suitable for
v.h.f. applications in battery-operated equipment.

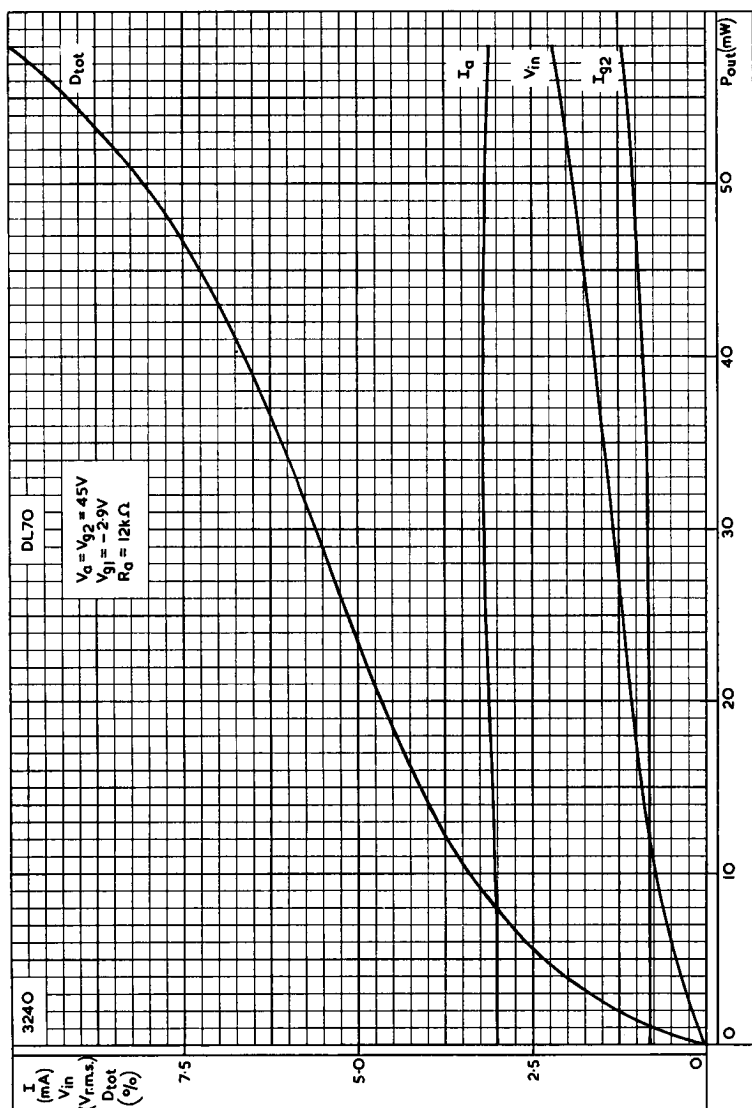


PERFORMANCE OF SINGLE DL70 AS CLASS 'A' AMPLIFIER. $V_a = V_{g2} = 45V$

DL70

SUBMINIATURE V.H.F. OUTPUT PENTODE

*Subminiature output pentode suitable for
v.h.f. applications in battery-operated equipment.*

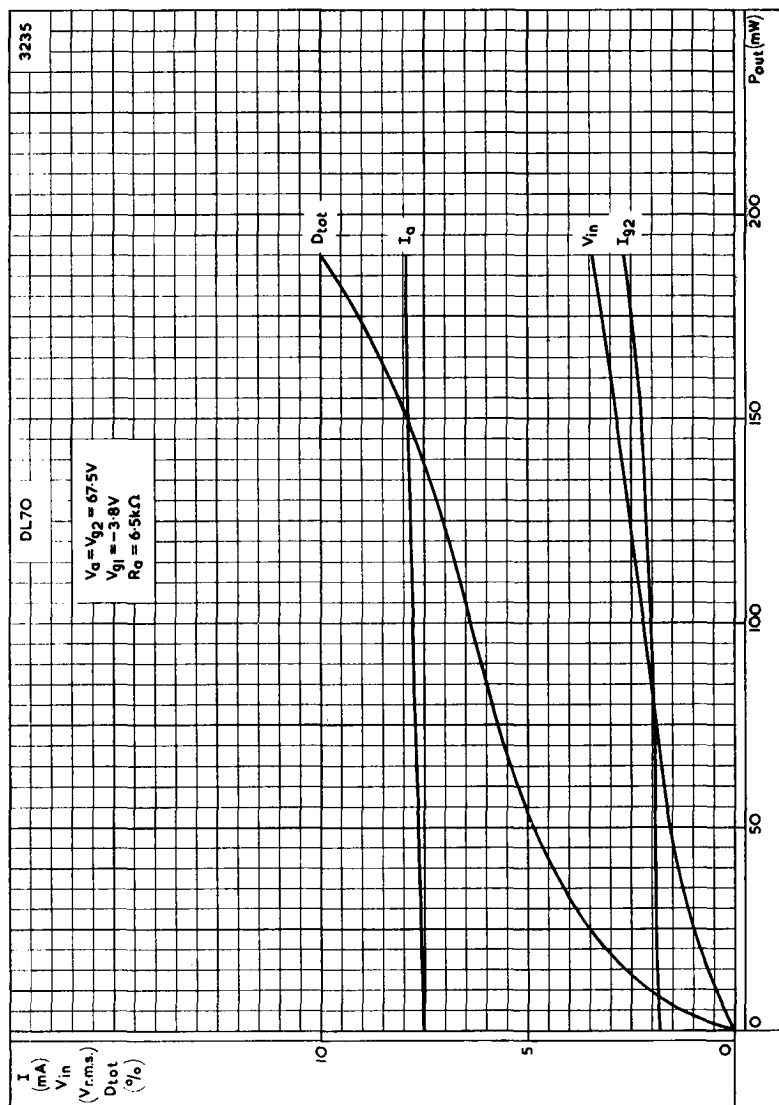


PERFORMANCE OF SINGLE DL70 AS CLASS 'A' AMPLIFIER. $V_{a1} = V_{g2} = 67.5V$

SUBMINIATURE V.H.F. OUTPUT PENTODE

DL70

Subminiature output pentode suitable for
v.h.f. applications in battery-operated equipment.

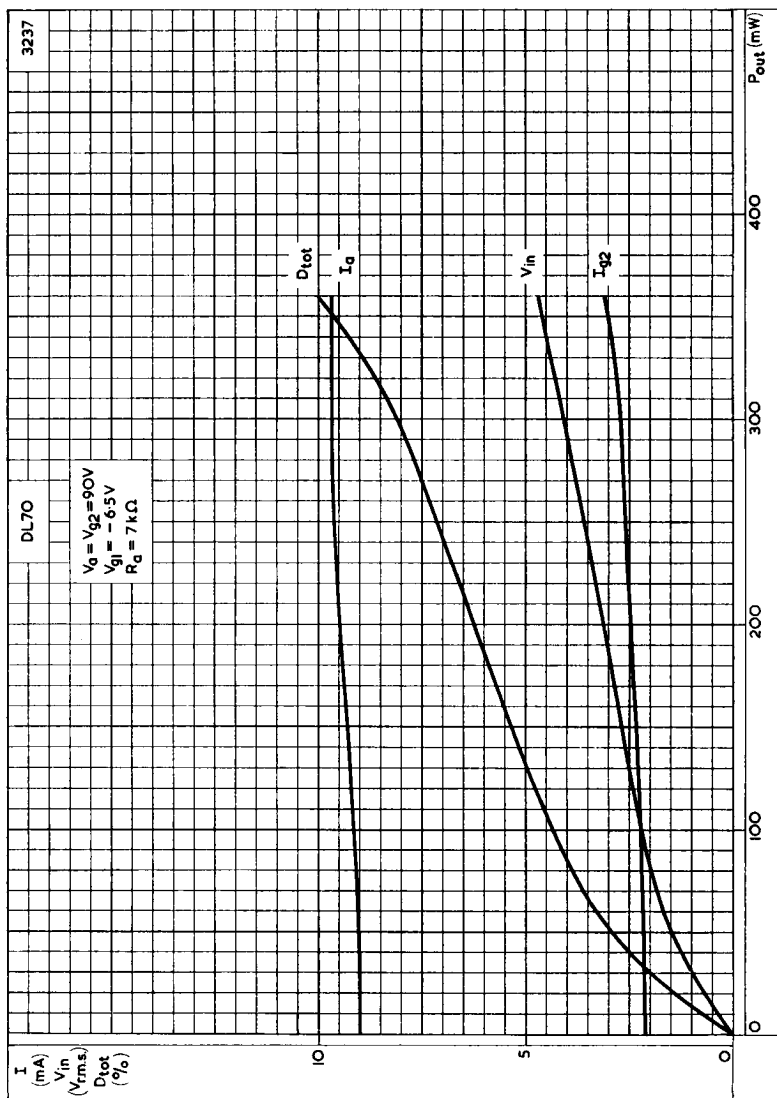


PERFORMANCE OF SINGLE DL70 AS CLASS 'A' AMPLIFIER. $V_a = V_{g2} = 90V$

DL70

SUBMINIATURE V.H.F. OUTPUT PENTODE

*Subminiature output pentode suitable for
v.h.f. applications in battery-operated equipment.*

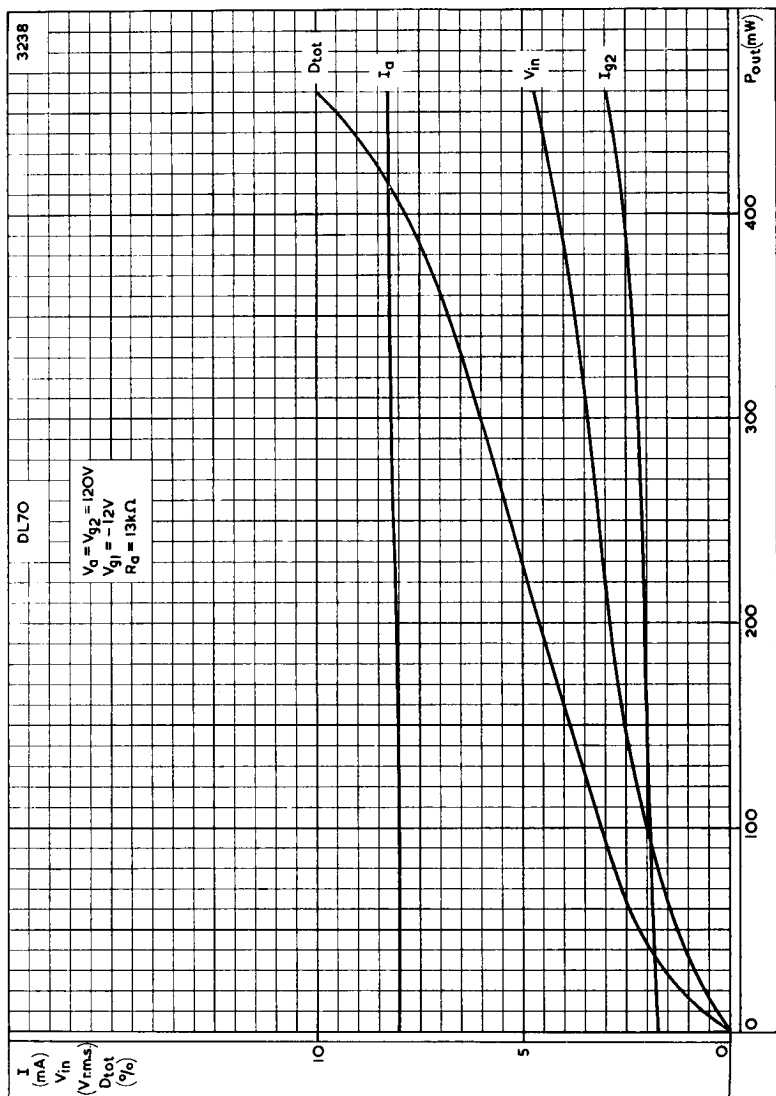


PERFORMANCE OF SINGLE DL70 AS CLASS 'A' AMPLIFIER. $V_a = V_{g2} = 120V$

SUBMINIATURE V.H.F. OUTPUT PENTODE

DL70

Subminiature output pentode suitable for
v.h.f. applications in battery-operated equipment.

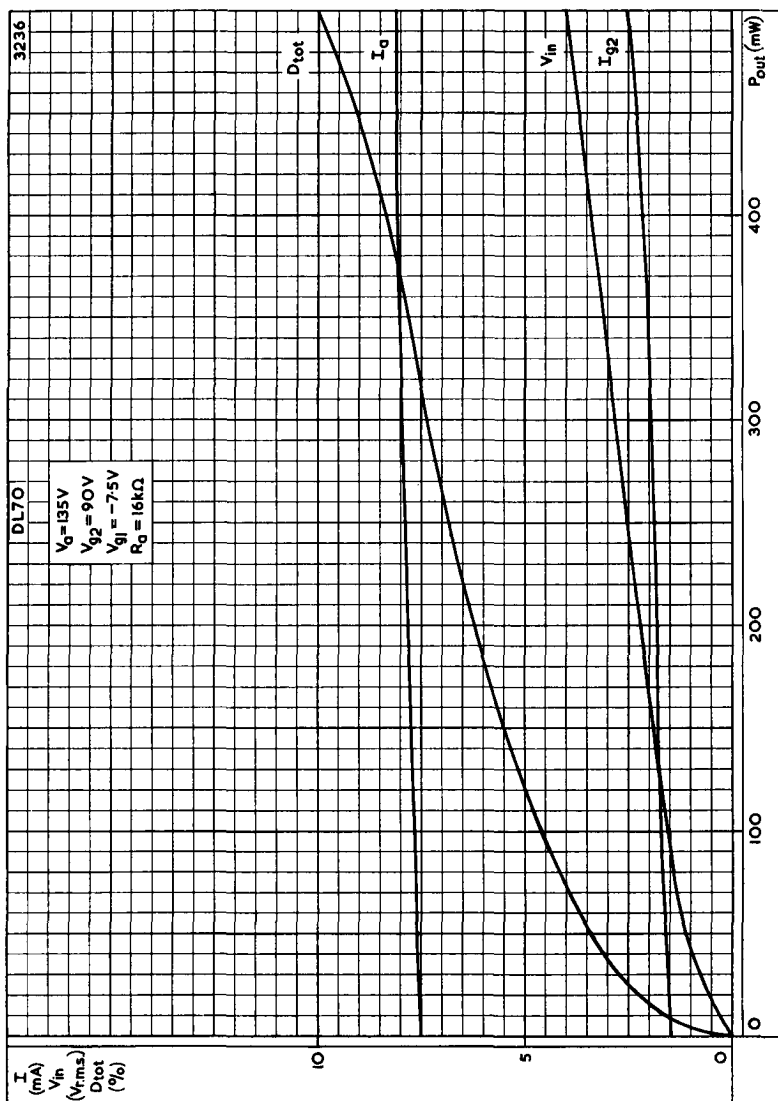


PERFORMANCE OF SINGLE DL70 AS CLASS 'A' AMPLIFIER. $V_a = 135V$, $V_{g2} = 90V$

DL70

SUBMINIATURE V.H.F. OUTPUT PENTODE

Subminiature output pentode suitable for
v.h.f. applications in battery-operated equipment.

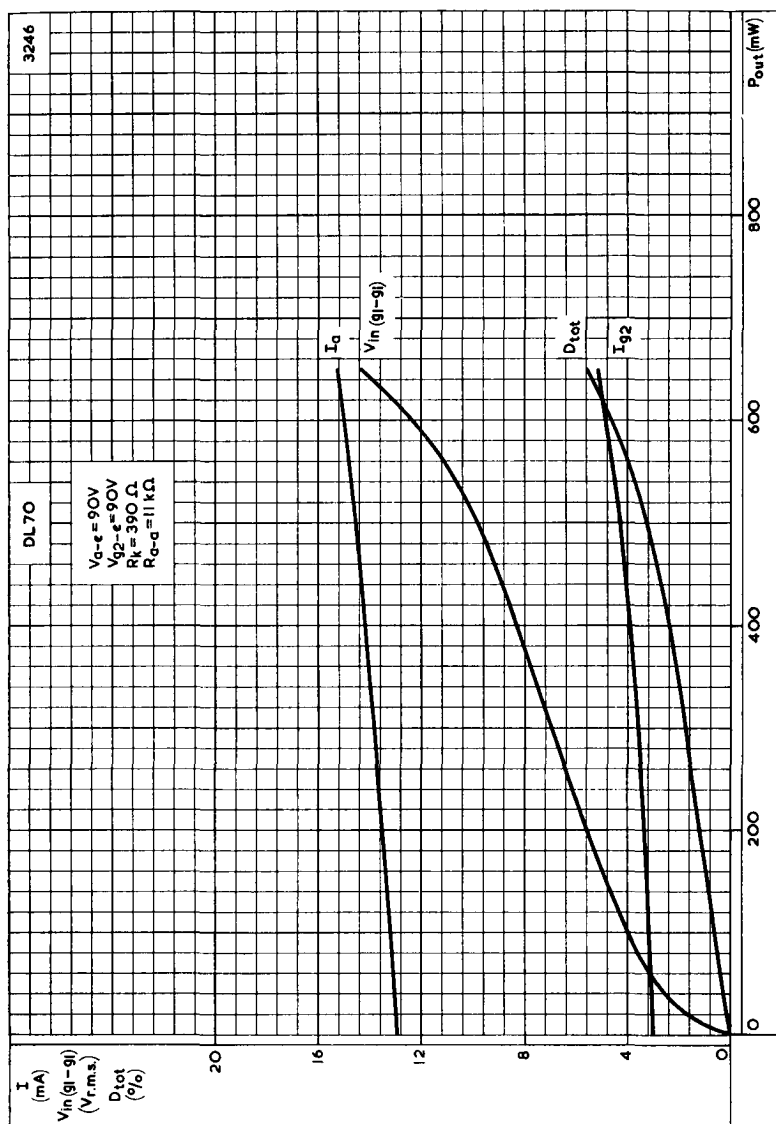


PERFORMANCE OF TWO DL70 IN CLASS 'AB' PUSH-PULL
 $V_{g2-e} = V_{g2-e} = 90V$



SUBMINIATURE V.H.F. OUTPUT PENTODE

DL70

Subminiature output pentode suitable for
v.h.f. applications in battery-operated equipment.

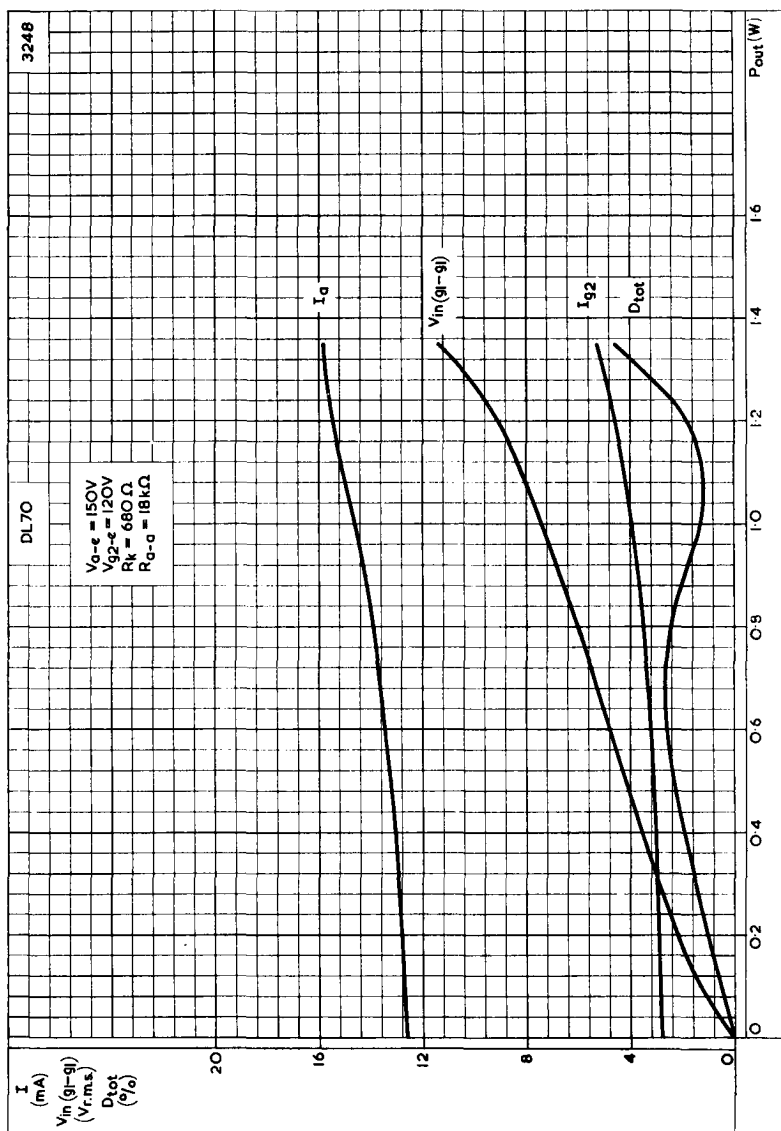

PERFORMANCE OF TWO DL70 IN CLASS 'AB' PUSH-PULL
 $V_{a-e} = 150V$, $V_{g2-e} = 120V$