

—Standard Valves—

4016-B
Valve

4016-B VALVE

TRIODE.

SPECIFICATION.

Cathode.

Pure Tungsten filament.
Constant voltage type.


Dimensions.

Overall length 15" (38 cms.)
Bulb diameter $4\frac{1}{8}$ " (10.5 cms.)
Net weight $2\frac{1}{4}$ lbs. (1,000 gms.)

Constants.

Filament voltage 14 volts
Nominal filament current 18 amps.
Total emission 1.2 amp.
* Impedance 7,700 ohms
* Amplification factor 17
* Mutual conductance 2.2 m.a. per volt
Grid-anode capacity 10 $\mu\mu\text{F}$.
Anode-filament capacity 2.5 $\mu\mu\text{F}$.
Grid-filament capacity 10 $\mu\mu\text{F}$.

* at anode current of 0.1 amps,
 $V_p = 4,000$ volts.

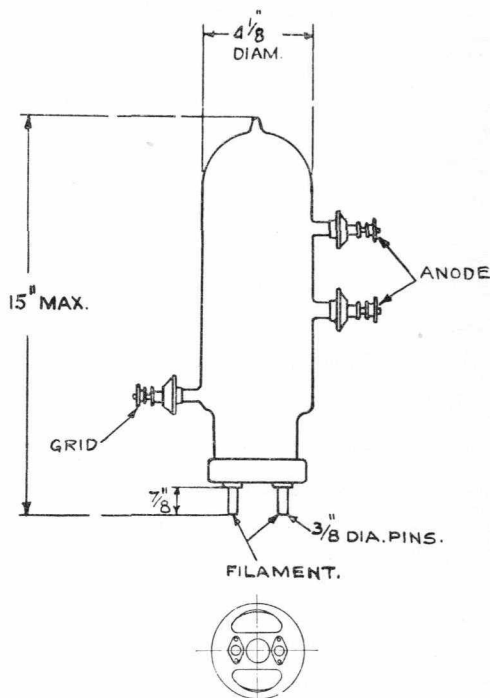

LIMITING CONDITIONS FOR SAFE OPERATION.

Maximum direct anode voltage	4,000 volts
Maximum direct anode current	0.3 amps.
Maximum anode dissipation	400 watts
Maximum grid dissipation	100 watts
Maximum frequency for above ratings	33 Mc.
Maximum anode voltage for frequency of 50 Mc.	3,500 volts

Tentative data.

V.4016-B.1
Nov. 1937

—Standard Valves—

TYPICAL OPERATING CONDITIONS.

	Class B (A.F. Amp. and Mod.) for balanced 2 valve circuit
Direct anode voltage	4,000 volts
Grid bias	—100 volts
Direct anode current per valve—zero signal	0.03 amps.
Direct anode current per valve—maximum signal	0.16 amps.
Anode dissipation	280 watts
Load resistance—anode to anode	23,000 ohms
Maximum output—2 valves	700 watts



RADIO FREQUENCY OPERATION.

	Class B Telephony Modulated carrier applied to grid			
Direct anode voltage	4,000	4,000	4,000	3,500 volts
Direct anode current	0.12	0.12	0.12	0.10 amps.
Grid bias	—130	—130	—130	—100 volts
Power output	0.15	0.14	0.12	0.10 Kw.
Anode dissipation	0.33	0.34	0.36	0.25 Kw.
FREQUENCY	6	10	33	50 Mc.

	Class C Telephony				Class C Telegraphy			
	Subject to anode modulation				Unmodulated			
Direct anode voltage	3,000	3,000	3,000	2,500	4,000	4,000	4,000	3,500 volts
Direct anode current	0.2	0.2	0.2	0.16	0.2	0.2	0.2	0.16 amps.
Grid bias	—200	—200	—200	—150	—300	—300	—300	—250 to —350 volts
Carrier output	0.4	0.375	0.36	0.18	0.5	0.45	0.4	0.3 Kw.
Anode dissipation	0.2	0.225	0.24	0.22	0.3	0.35	0.4	0.22 Kw.
FREQUENCY	6	10	33	50	6	10	33	50 Mc.

—Standard Valves—

4016-B
Valve

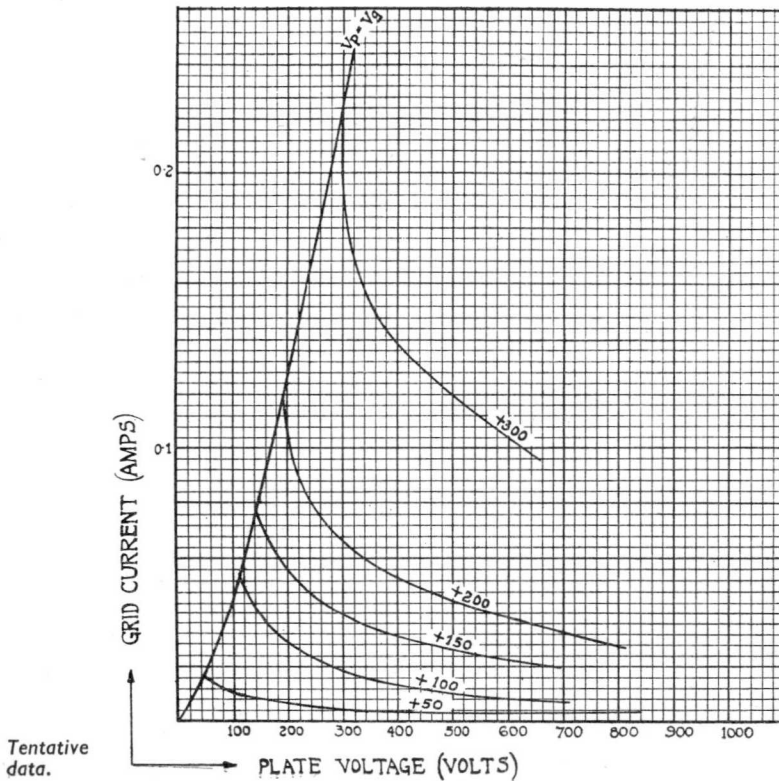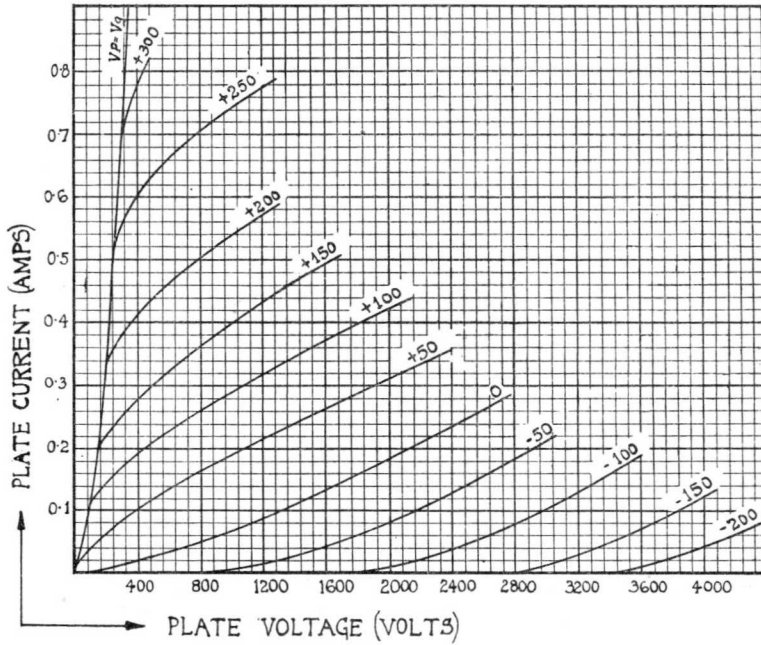

V.4016-B.2
Nov. 1937

8-5107
Voice

Standard 1-11-53

PRINTED IN
ENGLAND