

High-Mu Triode

CERAMIC-METAL PENCIL TUBE
FAST WARM-UP TIME WITH EXCELLENT THERMAL STABILITY

For Plate- or Grid-Pulsed Oscillator and Grid- or Cathode-Pulsed Amplifier Applications to 4000 Mc/s and for Frequency Multiplier Service to over 1000 Mc/s


ELECTRICAL

Heater, for Unipotential Cathode			
Voltage (AC or DC)	6.3 $\pm$ 10%		V
Current at heater volts = 6.3.	0.295		A
Amplification Factor	70		
Transconductance, for dc plate mA = 40,			
dc plate volts = 150	35000	μ mhos	
Direct Interelectrode Capacitances^a			
Grid to plate.	1.9		pF
Grid to cathode.	5.5		pF
Plate to cathode	0.07 max		pF

MECHANICAL

Operating Position	Any
Weight	0.4 oz
Altitude (without pressurization, 3500 V dc applied between plate cylinder and grid flange).	25000 ft
Dimensions and Terminal Connections.	See Accompanying <i>Dimensional Outline</i>
Socket for Heater Pins . . Grayhill No.22-3 ^b , Cinch 54A16325 ^c , or equivalent	
Terminal Connections (See <i>Dimensional Outline</i>)	

H - Heater
K - Cathode



G - Grid
P - Plate

THERMAL

Plate-Seal Temperature	225 max	$^{\circ}$ C
----------------------------------	---------	--------------

PLATE-PULSED SERVICE - Class C
Maximum Ratings, Absolute-Maximum Values

*For a maximum "ON" time^d of 50 microseconds
in any 5000-microsecond interval*

Peak Positive-Pulse Plate-Supply Voltage	3500	V
Peak Plate Current (from pulse supply)	3	A
DC Plate Current	40	mA
DC Grid Current.	15	mA
Plate Dissipation.	10	W
Pulse Duration	5	μ s
Duty Factor.	0.01	



Typical Operation

As Plate-Pulsed Oscillator with Rectangular Shape at 3300 Mc/s

With duty factor^f of 0.001 and pulse duration^e of
1 microsecond at a pulse repetition rate of 1000 pps

Peak Positive-Pulse Plate-Supply Voltage	1750	V
DC Plate Current	3	mA
DC Grid Current	1.4	mA
Grid Resistor	2000	Ω
Useful Power Output at Peak of Pulse	1300	W

GRID-PULSED OR CATHODE-PULSED SERVICE - Class C

Maximum Ratings, Absolute-Maximum Values

With duty factor of 0.01 and pulse width of 5 microseconds

Plate Supply Voltage	2000	V
Peak Plate Current	3	A
DC Grid Bias Voltage	-100 min	V
Peak Grid Current	1.5	A
Plate Dissipation	10	W

Typical Operation

As Grid-Pulsed Amplifier with Rectangular Shape at 1090 Mc/s

With pulse duration of 0.5 microsecond at a
pulse repetition rate of 2000 pps

Plate Supply Voltage	1000	V
Peak Plate Current	1.5	A
DC Grid Bias Voltage	-30	V
Peak Driver Power	50	W
Peak Power Output	600	W

^a With external shield.

^b Grayhill, Inc., 561 Hillgrove Ave., LeGrange, Ill.

^c Cinch Mfg. Co., 1026 South Homan Ave., Chicago, Ill.


^d "ON" time is defined as the sum of the duration of all individual pulses occurring during the indicated interval.

^e Pulse Duration is defined as the time interval between the 2 points on the pulse at which the instantaneous value is 70% of the peak power value.

^f Duty Factor is the product of pulse duration and repetition rate. For variable pulse durations and pulse repetition rates (pps), the duty factor is defined as the ratio of time "ON" to total elapsed time in any 5000-microsecond interval.



DIMENSIONAL OUTLINE

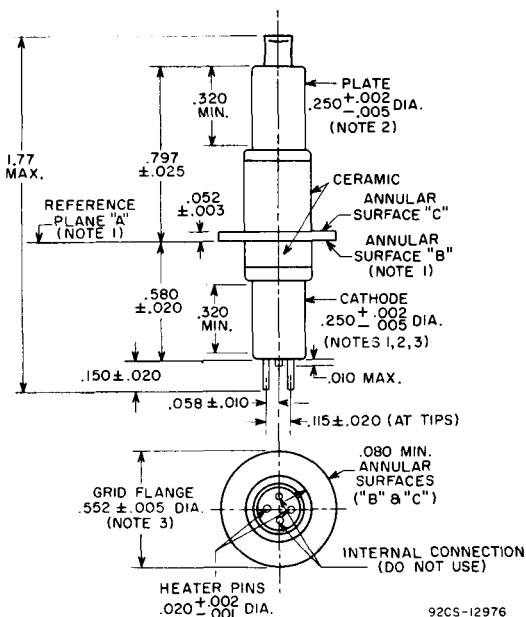

92CS-12976

DIMENSIONS IN INCHES

Reference Plane "A" is defined as that plane against which annular surface "B" of the grid flange abuts.

Annular Surface "B" is on the side of the grid flange toward the cathode cylinder.

Annular Surface "C" is on the side of the grid flange toward the plate cylinder.


Note 1: With annular surface "B" resting on reference plane "A", the axis of the cathode cylinder will be within 2° of a line perpendicular to reference plane "A".

Note 2: The axes of the plate cylinder and cathode cylinder will coincide within 0.010 inch.

Note 3: The axes of the cathode cylinder and grid flange will coincide within 0.010 inch.




Plate-Current Cutoff Characteristic

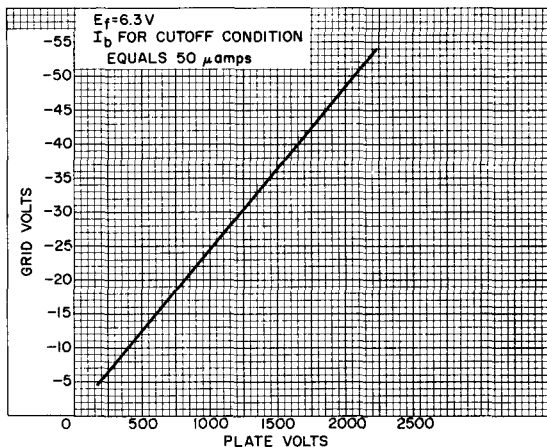

92CS-13207


Average Characteristics in Cathode-Drive Service

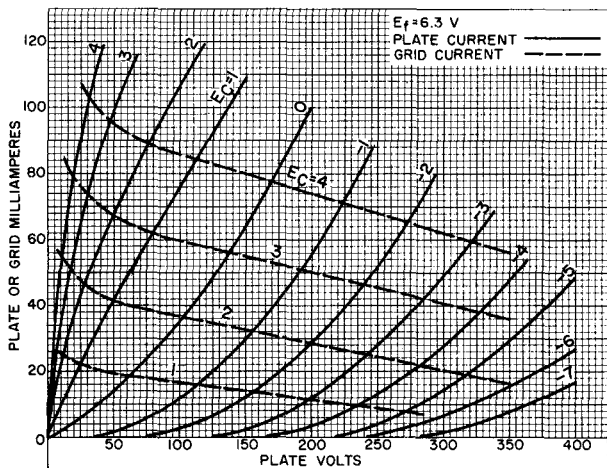

92CS-13208



Average Constant-Current Characteristics in Cathode-Drive Service

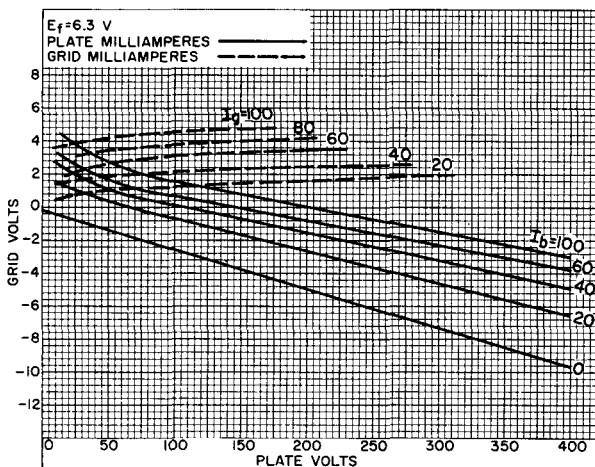

92CS-13209



High-Mu Triode

CERAMIC-METAL PENCIL TUBE OPERATING FREQUENCIES UP TO 4 GHz AND ABOVE

For Plate-Pulsed Operation as a Power Amplifier, Oscillator, and Frequency Multiplier in Compact Mobile and Aircraft Equipment at Altitudes up to 50,000 Feet without Pressurization

ELECTRICAL

Heater, for Unipotential Cathode

Voltage (AC or DC) 6.3 $\pm$ 10% V
Current at 6.3 volts 0.295 A

Cathode Warmup Time (Average) to reach 80%
of operating power output as rf oscillator
or amplifier 5 s

Amplification Factor 70

Transconductance, for dc plate mA = 35, dc
plate volts = 150, and cathode resistor
= 11 Ω 35000 μ mho

Direct Interelectrode Capacitances^a

Grid to plate. 2.0 pF
Grid to cathode. 5.5 pF
Plate to cathode 0.08 max pF

MECHANICAL

Operating Position Any
Weight 0.4 oz
Dimensions and Terminal Connections. See accompanying
Dimensional Outline


Sockets

Heater-Terminals Connector. Grayhill^a No.22-5,
or equivalent

Socket for operation up to about
550 MHz (Including heater-
terminals connector) . . Jettron^b No.CD7010, or equivalent

TERMINAL DIAGRAM (Bottom View)

H-Heater
K-Cathode



G-Grid
P-Plate

← Indicates a change.



RADIO CORPORATION OF AMERICA
Electronic Components and Devices Harrison, N. J.

DATA 1
9-67

PLATE-PULSED SERVICE—Class C

Maximum Ratings, Absolute-Maximum Values Up to 4 GHz

For a maximum duty factor of 0.01

	<i>For Altitudes up to 25,000 ft</i>	<i>For Altitudes up to 50,000 ft</i>	
Peak Plate Voltage	3500 max	2000 max	V
Peak Plate Current	3.0 max	3.0 max	A
DC Plate Current	40 max	40 max	mA
DC Grid Current	15 max	15 max	mA
Plate Dissipation ^c	10 max	10 max	W
Peak Heater-Cathode Voltage			
Heater negative with respect to cathode.	60 max	60 max	V
Heater positive with respect to cathode.	60 max	60 max	V

Typical Operation as Plate-Pulsed Oscillator at 3.3 GHz*With duty factor of 0.001 and pulse duration of 1 μ s*


Peak Plate Voltage	1750 V
DC Plate Current	3.0 mA
DC Grid Current	1.4 mA
Grid Resistor	2000 Ω
Useful Power Output at Peak of Pulse (Approx.) . . .	1300 W

**Typical Operation as a Power Amplifier in Frequency
Range of 1 to 1.2 GHz***With duty factor of 0.001 and pulse duration of 7 μ s*

Peak Plate Voltage	1300 V
Peak Plate Current	1.5 A
Peak Driving Power	250 W
Useful Power Output at Peak of Pulse (Approx.) . . .	1000 W

^a Grayhill, Inc., 561 Hillgrove Ave., La Grange, Ill.^b Jettron Products, Inc., 56 Route 10, Hanover, N. J.^c When used in a heat sink that will limit the plate-seal temperature to 225° C.

DIMENSIONAL OUTLINE

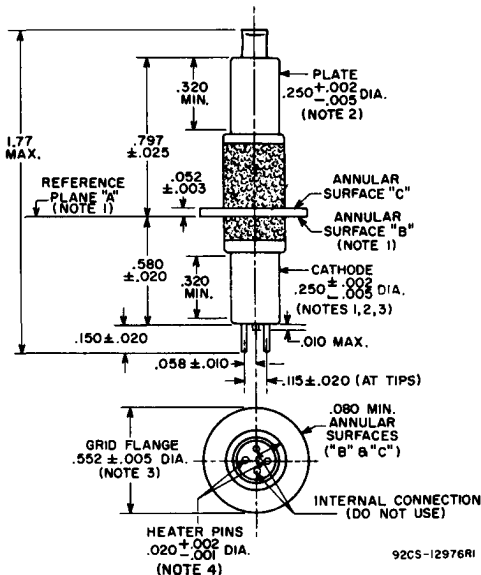

DIMENSIONS IN INCHES

Reference Plane "A" is defined as that plane against which annular surface "B" of the grid flange abuts.

Annular Surface "B" is on the side of the grid flange toward the cathode cylinder.

Annular Surface "C" is on the side of the grid flange toward the plate cylinder.

Note 1: With annular surface "B" resting on reference plane "A". The axis of the cathode cylinder will be within 2° of a line perpendicular to reference plane "A".

Note 2: The axes of the plate cylinder and cathode cylinder will coincide within 0.010 inch.


Note 3: The axes of the cathode cylinder and grid flange will coincide within 0.005 inch.

Note 4: Pin diameter is slightly greater when pretinned.

← Indicates a change.




Plate-Current Cutoff Characteristic

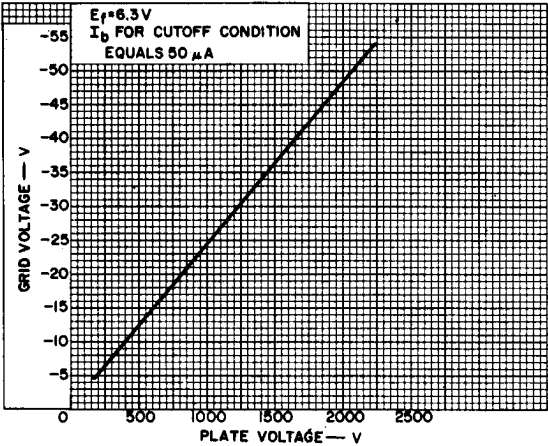

92CS-13207


Average Plate and Grid Characteristics

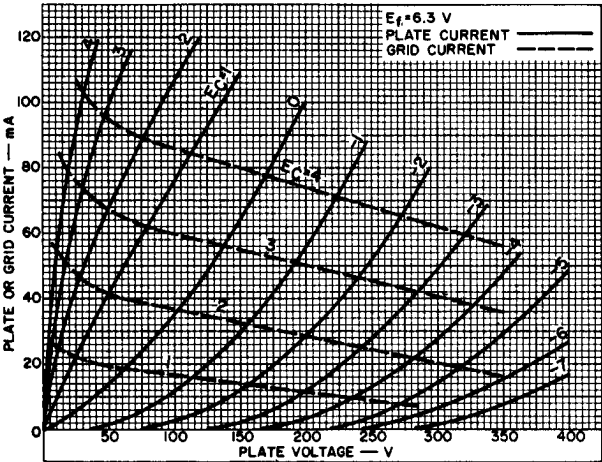

92CS-13208R1



Average Constant-Current Characteristics in Cathode-Drive Service

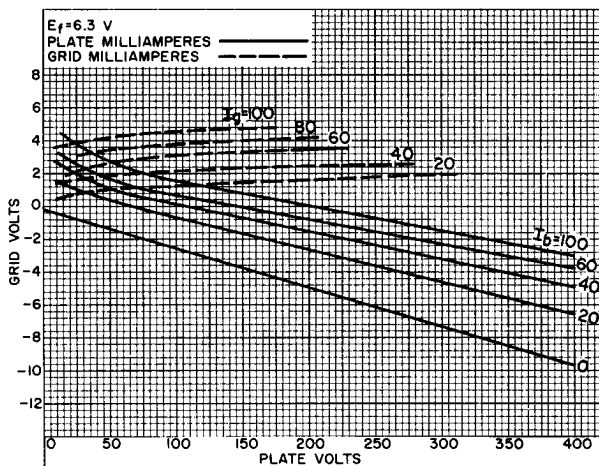

92CS-13209

