

TRIODE PENTODE

ECL83

Combined triode and output pentode with separate cathodes intended for use in audio frequency applications.

HEATER Suitable for parallel operation a.c. or d.c.

V_h	6.3	V
I_h	600	mA

MOUNTING POSITION

Any

CAPACITANCES (measured without an external shield)

C_{at-gp}	<0.1	pF
C_{at-ap}	<1.6	pF
C_{gt-gp}	<0.03	pF
C_{gt-ap}	<0.05	pF

Pentode section

C_{a-g1}	<0.2	pF
C_{in}	5.7	pF
C_{out}	4.7	pF
C_{g1-h}	0.4	pF

Triode section

C_{a-g}	1.6	pF
C_{in}	2.3	pF
C_{out}	0.32	pF

CHARACTERISTICS

Pentode section

V_a	170	200	V
V_{g2}	170	200	V
I_a	30	27	mA
I_{g2}	5.0	4.4	mA
V_{g1}	-9.5	-13	V
g_m	5.5	5.0	mA/V
r_a	53	65	k Ω
μ_{g1-g2}	10	10	

Triode section

V_a	170	200	V
I_a	1.6	2.4	mA
V_g	-1.5	-1.5	V
g_m	2.1	2.5	mA/V
r_a	40	34	k Ω
μ	82	85	

ECL83

TRIODE PENTODE

Combined triode and output pentode with separate cathodes intended for use in audio frequency applications.

PENTODE SECTION AS AUDIO OUTPUT VALVE

Single valve class 'A'

V_a	170	200	V
V_{g2}	170	200	V
V_{g1}	-9.5	-13	V
$I_{a(o)}$	30	27	mA
$I_{g2(o)}$	5.0	4.4	mA
R_k	270	410	Ω
R_a	5.5	7.5	k Ω
$V_{in(r.m.s.)}$	5.0	5.2	V
P_{out}	2.2	2.5	W
D_{tot}	10	10.5	%

Two valves in class 'AB' push-pull

V_a	170	200	V
V_{g2}	170	200	V
* R_k	180	220	Ω
$I_{a(o)}$	2×24	2×25	mA
I_a (max. sig.)	2×27.5	2×29	mA
$I_{g2(o)}$	2×3.8	2×3.9	mA
I_{g2} (max. sig.)	2×6.25	2×8.5	mA
R_{a-a}	6.5	7.5	k Ω
$V_{in(g1-g1)r.m.s.}$	17	23.5	V
P_{out}	5.0	7.2	W
D_{tot}	3.6	4.2	%

*Common cathode bias resistor

TRIODE SECTION AS A.F. VOLTAGE AMPLIFIER

V_b (V)	R_a (k Ω)	I_a (μ A)	R_k (k Ω)	$\frac{V_{out}}{V_{in}}$	V_{out} (V _{r.m.s.})	R_{g1}^* (k Ω)
170	100	650	1.8	49	15.3	330
200	100	720	2.2	47	17.7	330

$\frac{V_{out}}{V_{in}}$ measured with an input of 100mV

V_{out} measured for a total harmonic distortion of 5%

*Grid resistor of following valve.

TRIODE PENTODE

ECL83

Combined triode and output pentode with separate cathodes intended for use in audio frequency applications.


LIMITING VALUES

Pentode section

$V_{a(b)}$ max.	550	V
V_a max.	250	V
p_a max.	5.4	W
$V_{g2(b)}$ max.	550	V
V_{g2} max.	250	V
p_{g2} max.	1.2	W
p_{g2} max. (speech and music)	2.4	W
I_k max.	45	mA
R_{g1-k} max. (self-bias)	500	k Ω
R_{g1-k} max. (fixed bias)	250	k Ω
V_{h-k} max. (d.c. cathode positive or a.c.r.m.s.)	250	V
V_{h-k} max. (d.c. cathode negative)	100	V

Triode section


$V_{a(b)}$ max.	550	V
V_a max.	250	V
p_a max.	3.5	W
I_k max.	15	mA
R_{g1-k} max. (fixed bias)	1.0	M Ω
R_{g1-k} max. (grid current biasing)	22	M Ω
V_{h-k} max. (d.c. cathode positive or a.c.r.m.s.)	250	V
V_{h-k} max. (d.c. cathode negative)	100	V

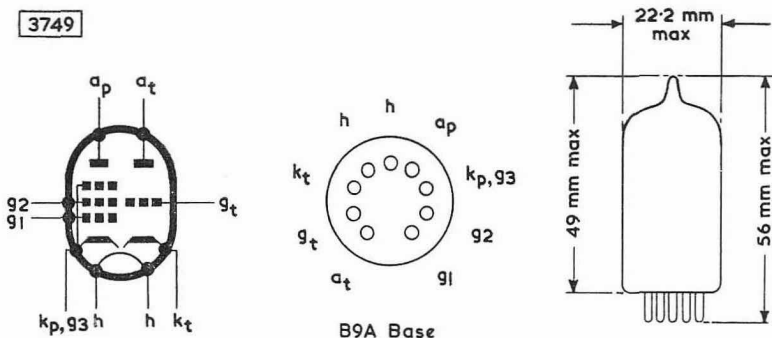

ECL83

TRIODE PENTODE

Combined triode and output pentode with separate cathodes intended for use in audio frequency applications.

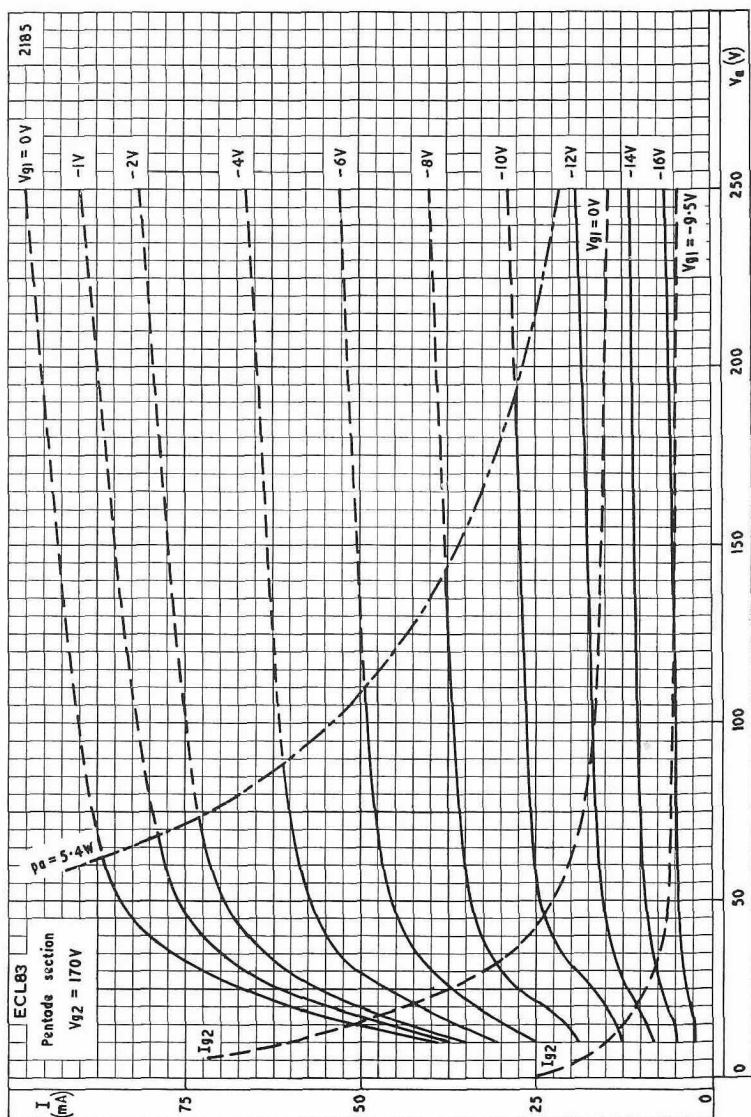


ANODE AND SCREEN-GRID CURRENTS PLOTTED AGAINST ANODE VOLTAGE WITH CONTROL-GRID VOLTAGE AS PARAMETER. $V_{g2} = 170V$

TRIODE PENTODE

ECL83

Combined triode and output pentode with separate cathodes intended for use in audio frequency applications.

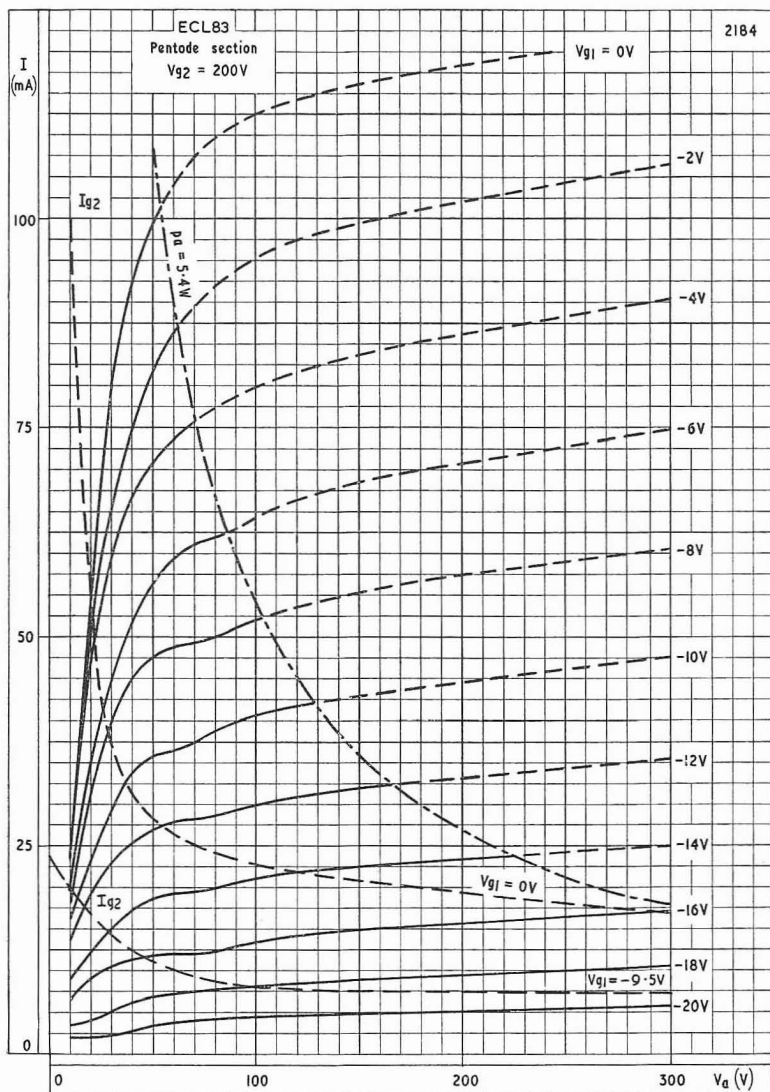


ANODE AND SCREEN-GRID CURRENTS PLOTTED AGAINST ANODE VOLTAGE WITH CONTROL-GRID VOLTAGE AS PARAMETER. $V_{g2} = 200V$

ECL83

TRIODE PENTODE

Combined triode and output pentode with separate cathodes intended for use in audio frequency applications.

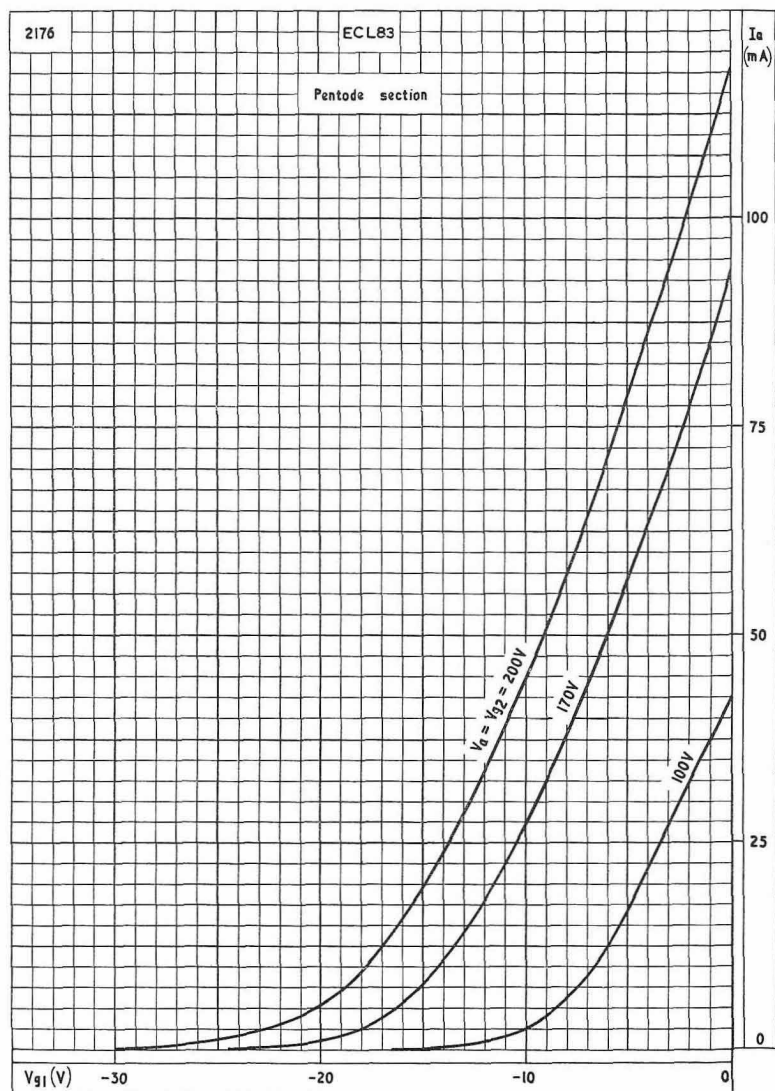


ANODE CURRENT PLOTTED AGAINST CONTROL-GRID VOLTAGE FOR VARIOUS ANODE AND SCREEN-GRID VOLTAGES

TRIODE PENTODE

ECL83

Combined triode and output pentode with separate cathodes intended for use in audio frequency applications.

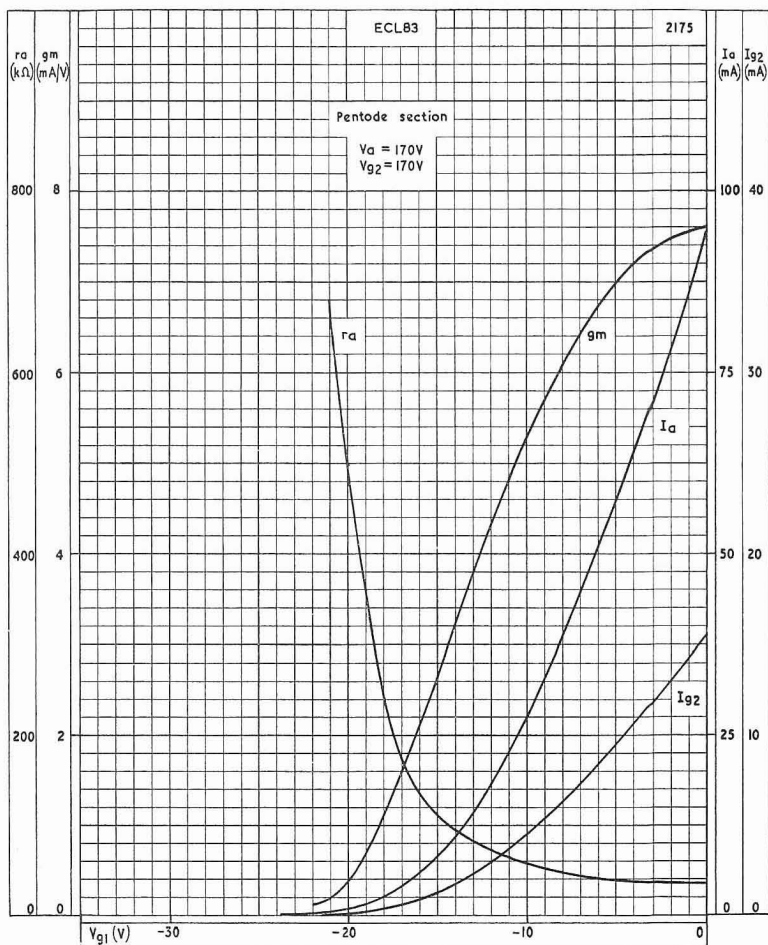


ANODE CURRENT, SCREEN-GRID CURRENT, MUTUAL CONDUCTANCE AND ANODE IMPEDANCE PLOTTED AGAINST CONTROL-GRID VOLTAGE.
 $V_a = V_{g2} = 170V$

ECL83

TRIODE PENTODE

Combined triode and output pentode with separate cathodes intended for use in audio frequency applications.

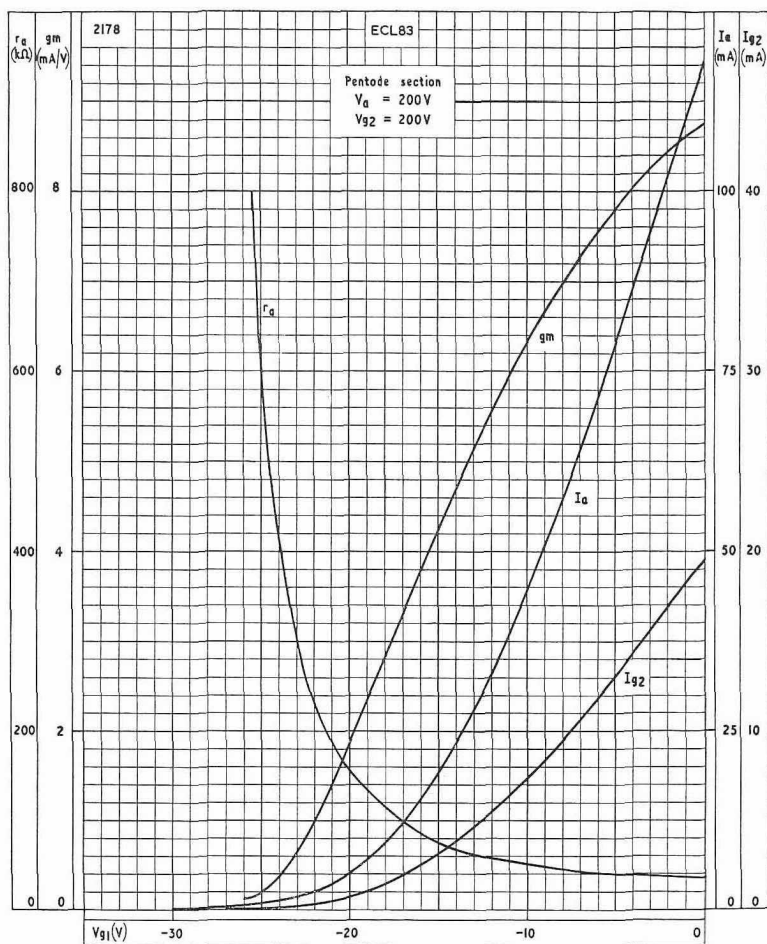


ANODE CURRENT, SCREEN-GRID CURRENT, MUTUAL CONDUCTANCE AND ANODE IMPEDANCE PLOTTED AGAINST CONTROL-GRID VOLTAGE.
 $V_a = V_{g2} = 200V$

TRIODE PENTODE

ECL83

Combined triode and output pentode with separate cathodes intended for use in audio frequency applications.

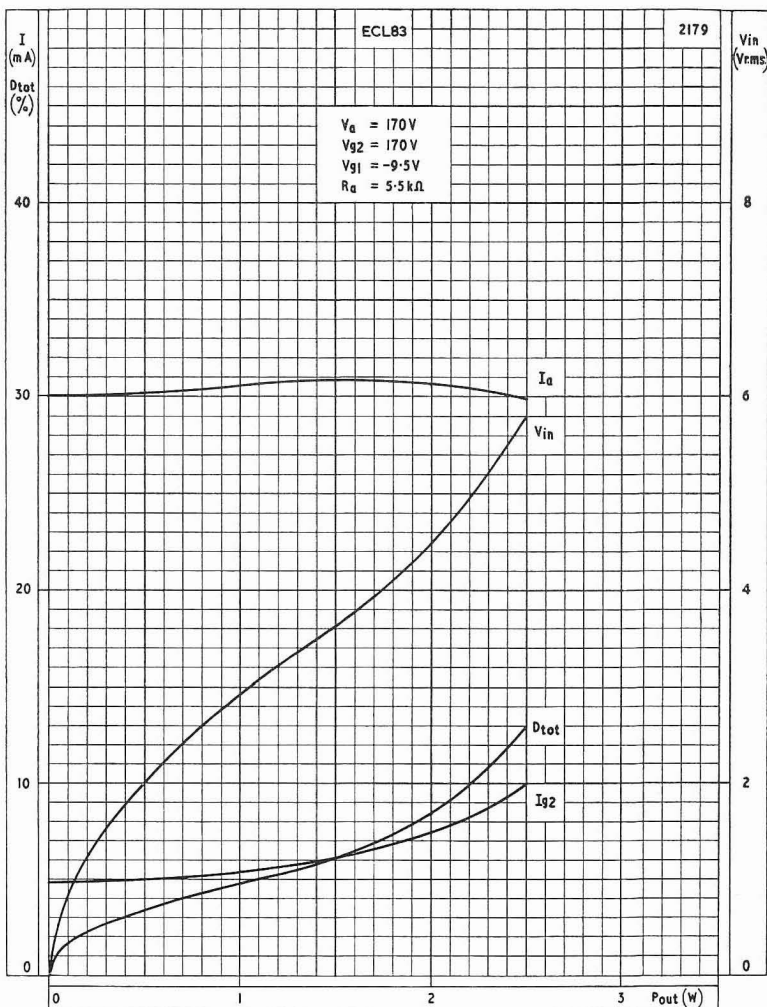


PERFORMANCE OF PENTODE SECTION AS CLASS 'A' AMPLIFIER WITH FIXED BIAS. $V_a=170V$

ECL83

TRIODE PENTODE

Combined triode and output pentode with separate cathodes intended for use in audio frequency applications.

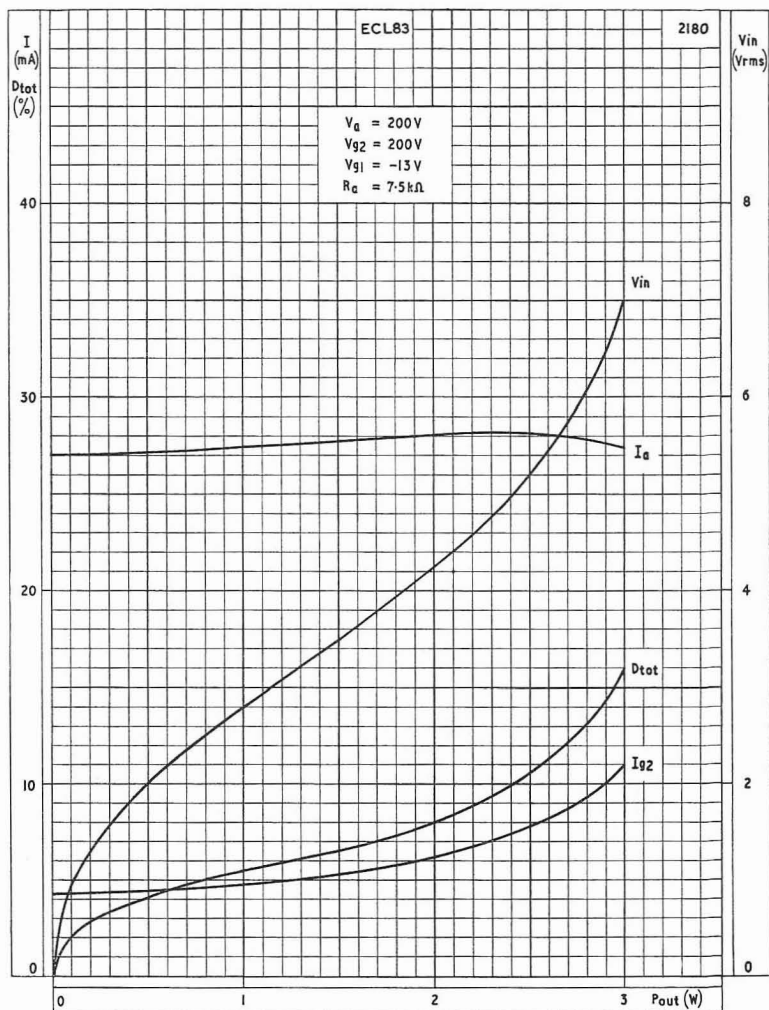


PERFORMANCE OF PENTODE SECTION AS CLASS 'A' AMPLIFIER WITH FIXED BIAS. $V_a=200V$

TRIODE PENTODE

ECL83

Combined triode and output pentode with separate cathodes intended for use in audio frequency applications.

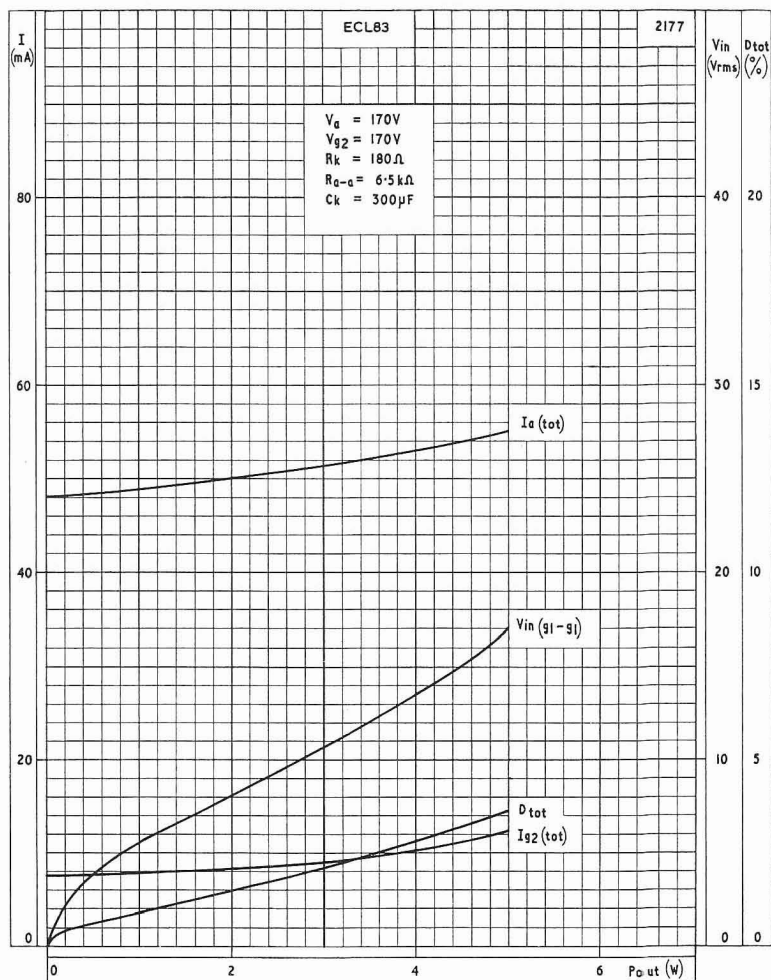


PERFORMANCE OF ECL83 IN PUSH-PULL. $V_a = 170V$

ECL83

TRIODE PENTODE

Combined triode and output pentode with separate cathodes intended for use in audio frequency applications.

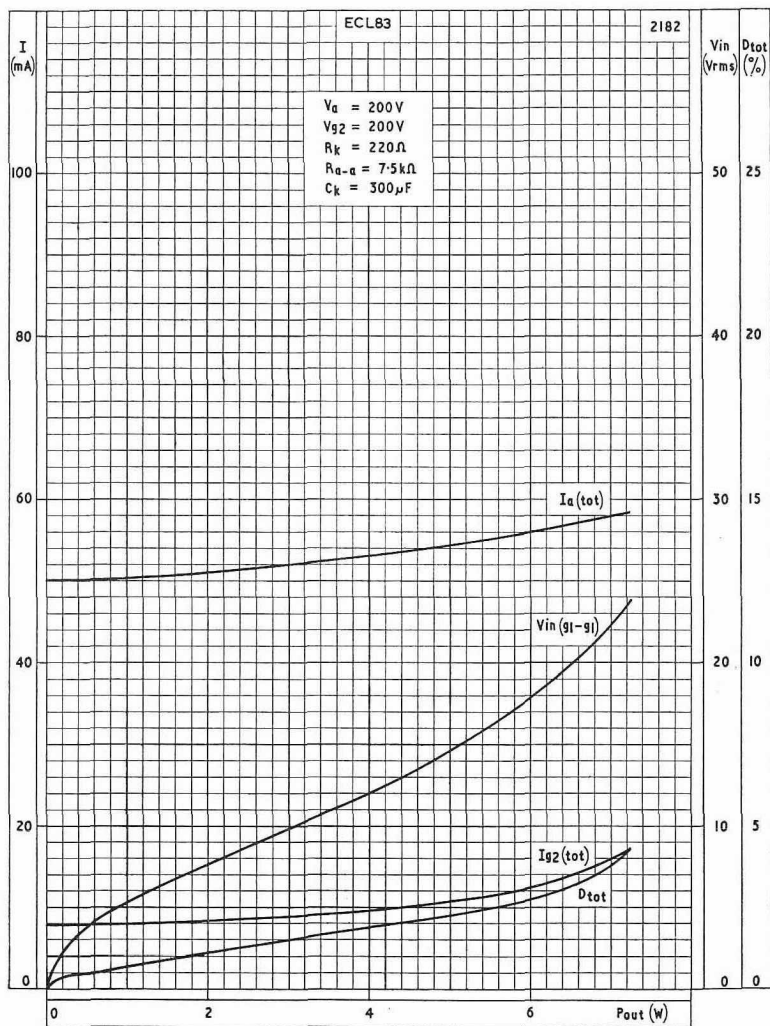


PERFORMANCE OF ECL83 IN PUSH-PULL. $V_a=200V$

TRIODE PENTODE

ECL83

Combined triode and output pentode with separate cathodes intended for use in audio frequency applications.

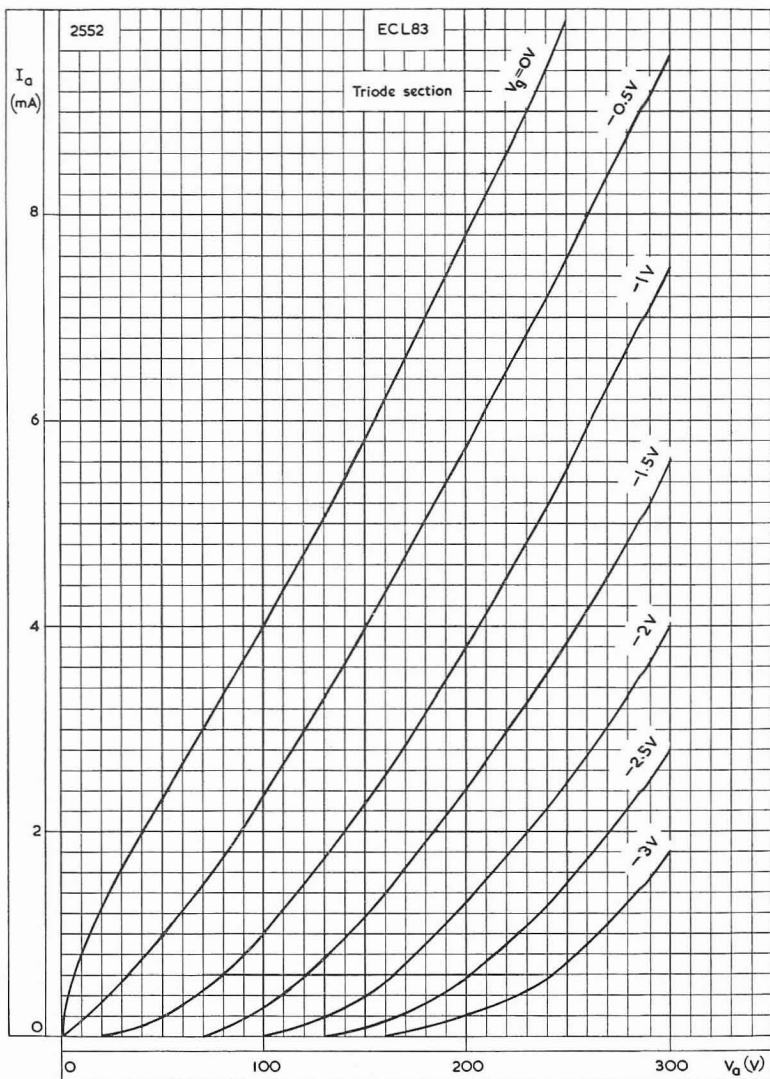


ANODE CURRENT PLOTTED AGAINST ANODE VOLTAGE WITH GRID VOLTAGE AS PARAMETER

ECL83

TRIODE PENTODE

Combined triode and output pentode with separate cathodes intended for use in audio frequency applications.

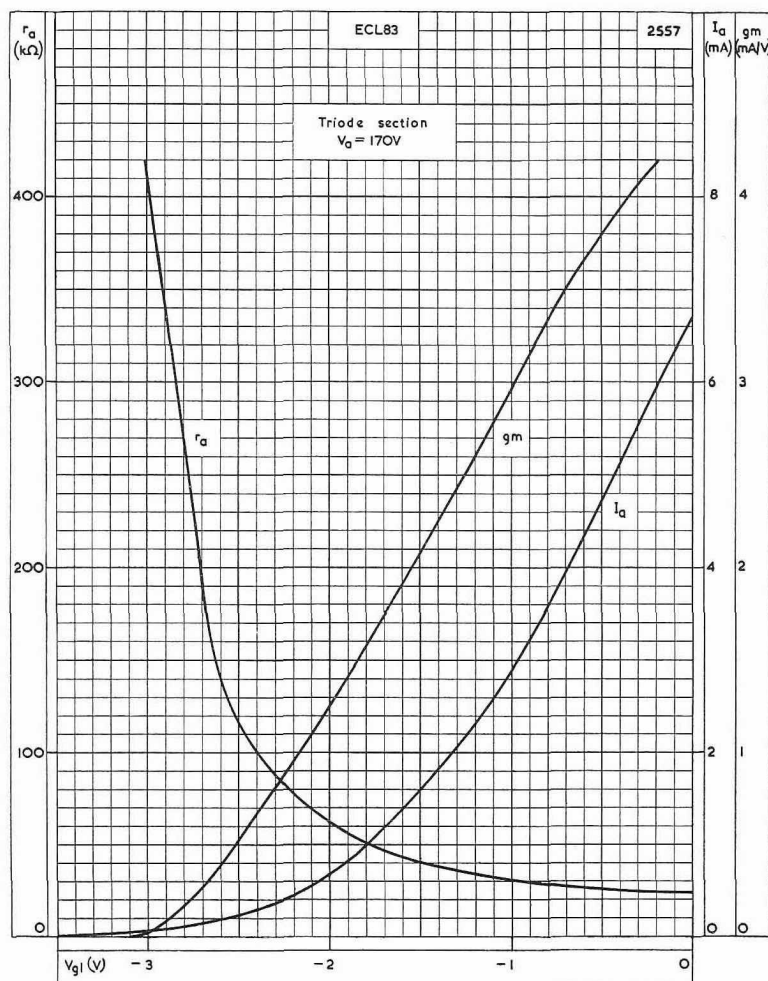


ANODE CURRENT, MUTUAL CONDUCTANCE AND ANODE IMPEDANCE
PLOTTED AGAINST GRID VOLTAGE. $V_a = 170V$

TRIODE PENTODE

ECL83

Combined triode and output pentode with separate cathodes intended for use in audio frequency applications.

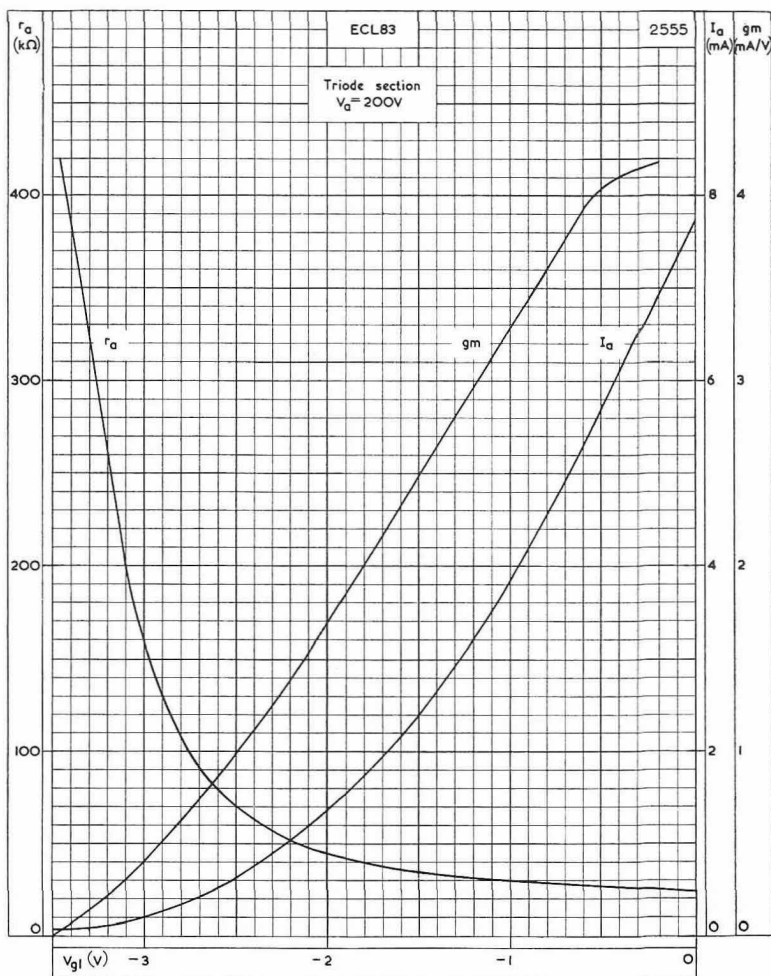

ANODE CURRENT, MUTUAL CONDUCTANCE AND ANODE IMPEDANCE
PLOTTED AGAINST GRID VOLTAGE. $V_a = 200V$

