

R.F. OR A.F. PENTODE

EF36

High impedance pentode for use as general purpose voltage amplifier, and in phase inverters, etc. For curves, see EF37.

HEATER

This valve is suitable for DC/AC operation.

V_h	6.3	V
I_h	0.2	A

CAPACITANCES

C_{a-g}	< 0.02	$\mu\mu F$
C_{in}	5.5	$\mu\mu F$
C_{out}	8.5	$\mu\mu F$

OPERATING CONDITIONS AS R.F. OR I.P. AMPLIFIER

V_a	100	200	250	V
V_{g2}	100	100	100	V
I_a	3	3	3	mA
V_{g1}	-2	-2	-2	V
I_{g2}	0.8	0.8	0.8	mA
μ	1,800	3,600	4,500	
g_m	1.8	1.8	1.8	mA/V
r_a	1.0	2.0	2.5	megohms

LIMITING VALUES

$V_{a(b)} \text{ max.}$	550	V
$V_a \text{ max.}$	300	V
$w_a \text{ max.}$	1	W
$I_k \text{ max.}$	6	mA
$V_{g2(b)} \text{ max.}$	550	V
$V_{g2} \text{ max.}$	125	V
$w_{g2} \text{ max.}$	0.3	W
$V_{g1} \text{ max. (} I_{g1}=0.3\mu A \text{)}$	-0.6	V
$I_{g2} \text{ max.}$	1.4	mA
$I_{g2} \text{ min.}$	0.8	mA
$R_{g1} \text{ max (self bias)}$	3	megohms
$R_{g1} \text{ max (fixed bias)}$	1	megohm
$V_{h-k} \text{ max.}$	100	V
$R_{h-k} \text{ max.}$	20,000	ohms

OPERATING CONDITIONS CONNECTED AS TRIODE

g_2 connected to a; g_3 connected to k

V_a	150	V
V_{g1}	-3	V
I_a	6	mA
μ	28	
g_m	2.8	mA/V
r_a	10,000	ohms

NOTE: FOR CURVES, SEE DATA SHEET ON TYPE EF.37



EF36

R.F. OR A.F. PENTODE

High impedance pentode for use as general purpose voltage amplifier, and in phase inverters, etc. For curves, see EF37.


OPERATING CONDITIONS AS RESISTANCE-COUPLED A.F. AMPLIFIER CONNECTED AS PENTODE

V_b V	R_a M Ω	I_a mA	R_{g2} M Ω	I_{g2} mA	R_k Ω	V_{out} (V _{rms})	V_{out} V _{in}	D _{tot} (%)
300	0.3	0.7	0.8	0.25	4000	11.2	175	1.4
250	0.3	0.6	0.8	0.2	4000	8.5	165	1.6
200	0.3	0.45	0.6	0.17	6400	5.0	130	1.8
100	0.3	0.22	0.6	0.08	6400	2.4	105	<1.0
300	0.2	1.1	0.4	0.4	3000	11.2	150	<1.0
250	0.2	0.9	0.4	0.35	3000	8.5	140	1.3
200	0.2	0.6	0.4	0.23	5000	5.0	115	1.0
100	0.2	0.3	0.4	0.12	5000	2.4	100	0.9
300	0.1	1.9	0.25	0.65	1600	11.2	115	1.0
250	0.1	1.6	0.25	0.5	1600	8.5	110	1.0
200	0.1	1.2	0.2	0.4	3000	5.0	95	<1.0
100	0.1	0.6	0.2	0.2	3000	2.4	85	<1.0

* I_a and I_{g2} measured at zero signal.


NOTE: Resistance of grid leak of following valve = 0.7 M Ω

ARRANGEMENT OF ELECTRODES AND BASE CONNECTIONS

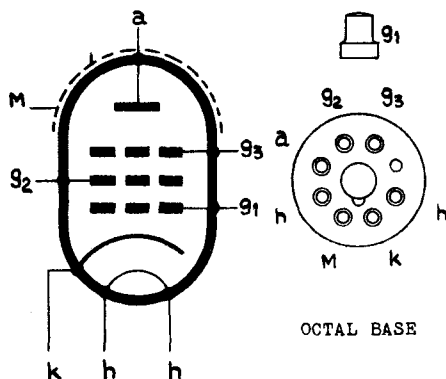

OCTAL BASE

DIMENSIONS

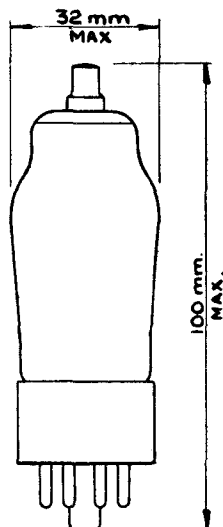

NOTE: FOR CURVES, SEE DATA SHEET ON TYPE EF.37

