



GRID CONTROL RECTIFIER TUBE

Xenon Gas Filling

EL C6H-1
EL C6H-2
EL C6H-3
EL C6H-4
EL C6H-5

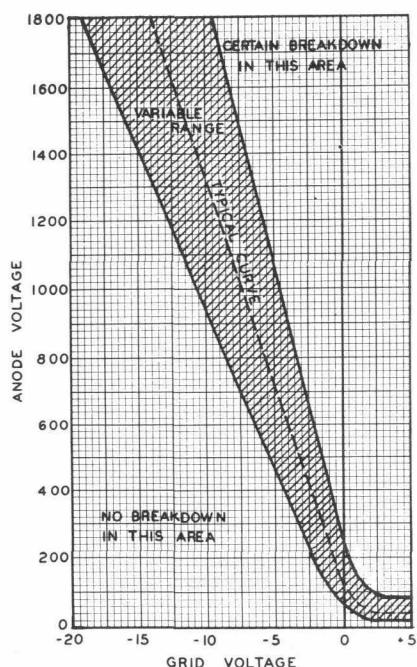

Control
Characteristic

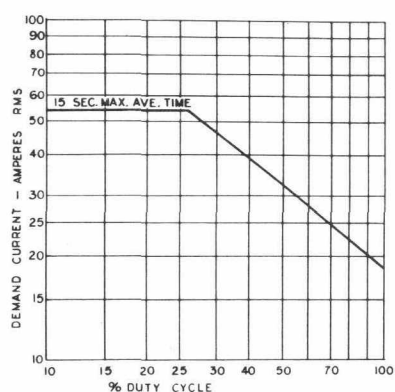

Back-To-Back
Contactor Rating

Two tubes connected in inverse parallel demand current with full conduction during each half cycle.

Maximum Rated Anode Current

D-c. Meter Value — Continuous	6.4 amps
D-c. Meter Value — Overload less than 3 sec.	12.8 amps
Averaging Time	15 secs
Oscillograph Peak — Continuously recurring	80 amps

Peak Forward Voltage (Max. Instantaneous) 1700 volts

Peak Inverse Voltage (Max. Instantaneous) 1700 volts

Max. Commutation Factor ($V/\mu\text{sec} \times A/\mu\text{sec}$) 130

Min. Frequency 25 cycles

Filament

Voltage	2.5 volts
Current	21 ± 2 amps
Heating Time (minimum)	60 secs

Average Arc Drop

Average Tube	11 volts
Highest Tube	15 volts

Anode Starting Voltage @ +3V d-c grid voltage

Average Tube	40 volts
Highest Tube	80 volts

Max. Anode Emission 100 μamps

Grid Characteristics

Critical Grid Voltage @ 1700 p.f.v.	-8.0 to -18 volts
Critical Grid Current	Less than 20 μamps
Grid-Anode Capacitance	approx. 5 μmf
Grid-Filament Capacitance	approx. 21 μmf

Maximum Negative Grid Voltage 100 volts

Deionization Time Less than 1000 μsecs

Max. Peak A-c Fault Current (Max. duration 0.1 sec.) 770 amps

Ambient Temperature Limits -55° to +75° C

Overall Dimensions (See outline drawing on back page)

The filament must be lit before drawing load current.

The above values are for return to filament transformer center tap.

Filament phasing during conduction must be as indicated on drawings.

The Engineering Manual contains additional information which should be considered in circuit design.



EL C6H-1
EL C6H-2
EL C6H-3
EL C6H-4
EL C6H-5

OUTLINE DRAWINGS


EL C6H Series

(NOTE: Dimensions nominal unless otherwise stated.)



EL C6H-1

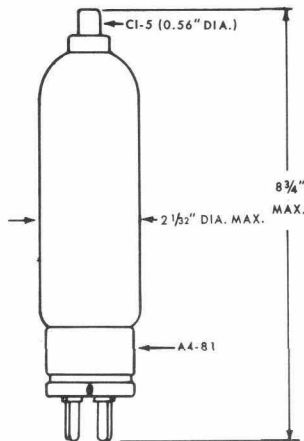


EL C6H-4

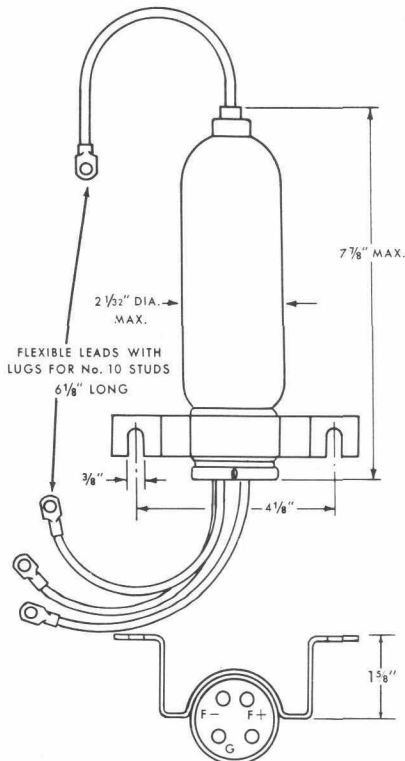


EL C6H-3

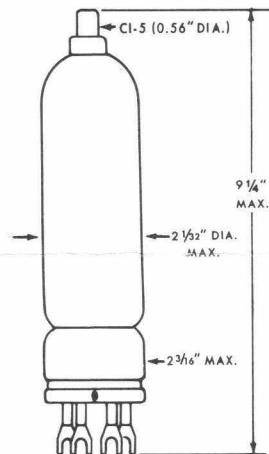

EL C6H-2

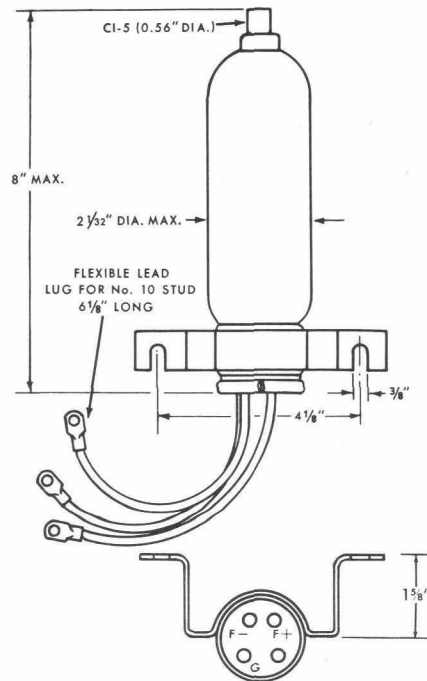

EL C6H-5

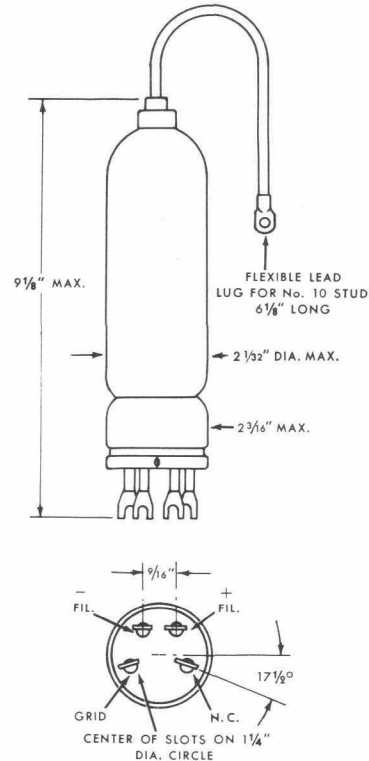

ELECTRONS

I N C O R P O R A T E D

127 SUSSEX AVENUE, NEWARK 3, N. J.