

Primed Trigger Tube**GDT120M**

An inexpensive trigger tube with light diode
suitable for operation in poor light conditions

Limit Ratings

Maximum anode voltage to prevent self-ignition in all tubes (Trigger voltage 0 V)	+340 V
Maximum trigger to cathode voltage at which breakdown will not occur in any tubes (anode voltage 315 V)	Cathode 0 V, Trigger +105 V Trigger 0 V, Cathode +70 V
Minimum trigger voltage necessary to cause breakdown in all tubes (anode voltage 315 V)	+155 V
Maximum cathode current	9 mA
Minimum cathode current	3 mA
Minimum supply voltage for priming diode	315 V

Characteristics

Anode running voltage at 4.5 mA (N.B.—Tubes may exhibit jumps of up to 20 V in operation).	94—130 V
Deionization time ($I_a = 4.5$ mA)	3 mS max. ←
Ionisation time ($V_T = 175$ V pulse)	500 μ S max.

Recommended Operating Conditions

Anode supply voltage	315 V
Cathode current	3.4 mA
Anode load resistor	47 k Ω
Trigger bias with respect to cathode (Trigger resistor 330 k Ω)	+80 V
Light anode to be connected via 10 M Ω to +315 V.	
Light cathode to be connected via 10 M Ω to 0 V.	

N.B. ← Indicates a change from previous data sheets.



GDT120M

Primed Trigger Tube

An inexpensive trigger tube with light diode
suitable for operation in poor light conditions

Mechanical Data


Mounting position

Any



Base

B7G

Base Connections
(underside view)




- 1 Trigger
- 2 } Cathode
- 3 }
- 4 Do not connect
- 5 Light cathode
- 6 Light anode
- 7 Anode

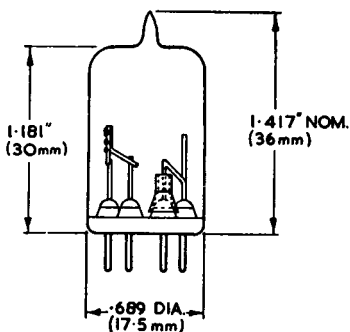

Primed Trigger Tube

GDT120M

An inexpensive trigger tube with light diode
suitable for operation in poor light conditions

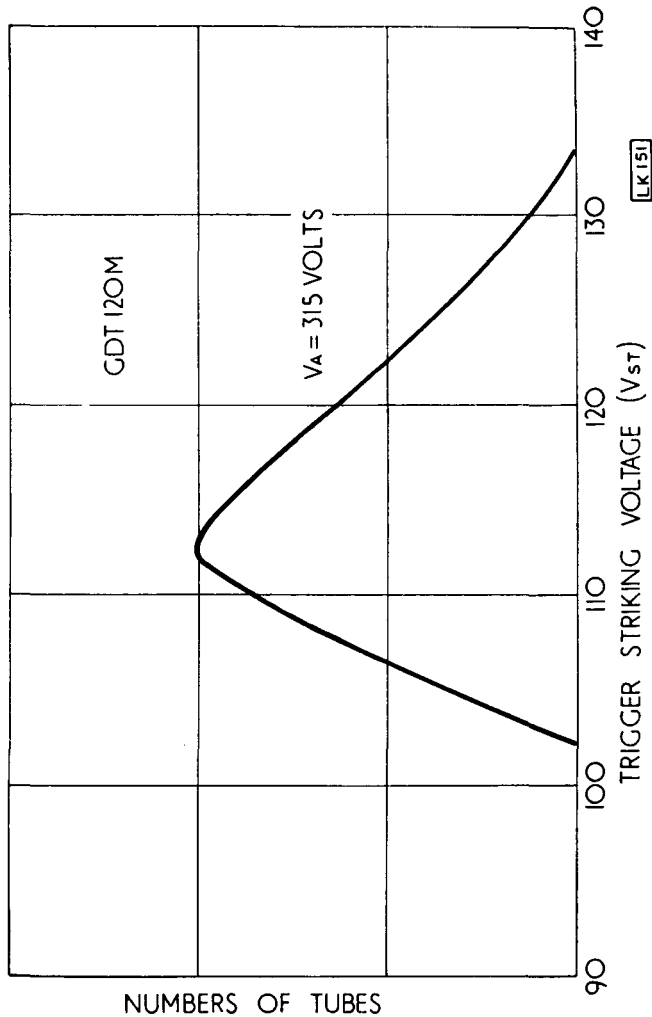

Distribution of Trigger Striking Volts



