

—Standard Valves—

4274-A
Valve

4274-A VALVE

FULL WAVE THERMIONIC HIGH VACUUM RECTIFIER.

SPECIFICATION.

Cathode.

Oxide coated filament.
Constant voltage type.

Base.



American medium 4-pin bayonet.

Dimensions.

Overall length $5\frac{5}{8}"$ (14.3 cms.)
Overall diameter $2\frac{3}{16}"$ (5.5 cms.)
Net weight 0.12 lbs. (55 gms.)

Constants.

Filament voltage 5 volts
Nominal filament current 2 amps.

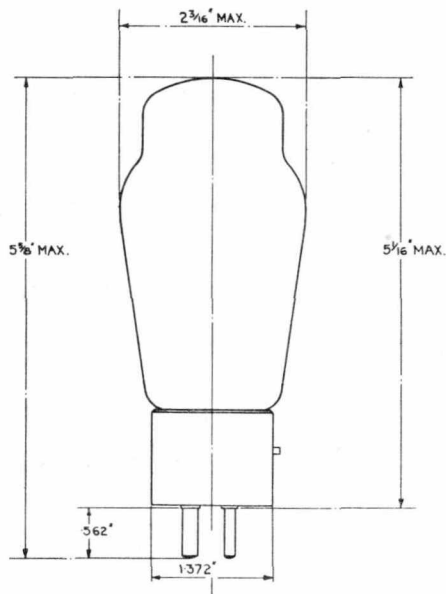

V.4274-A.1
Nov. 1937


—Standard Valves—

TYPICAL OPERATING CONDITIONS.


Input Filter	R.M.S. A.C. voltage per anode	Total rectified current—mA.
Choke—circuit A	550	160
	*550	200
	*660	160
Condenser—Circuit B	450	140
	*450	†150

* Maximum operating conditions.

† 4 u/F. max. input filter capacity.

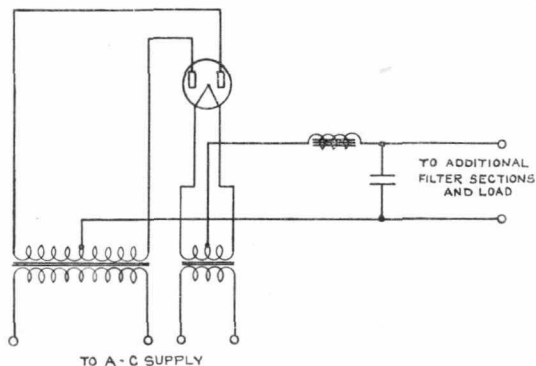



CHOKE INPUT FILTER
CIRCUIT A

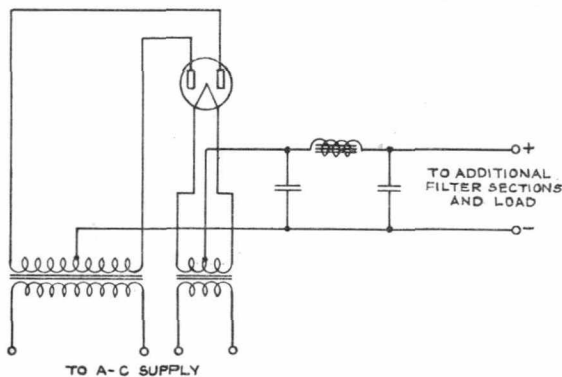

CONDENSER INPUT FILTER
CIRCUIT B

—Standard Valves—

4274-A
Valve

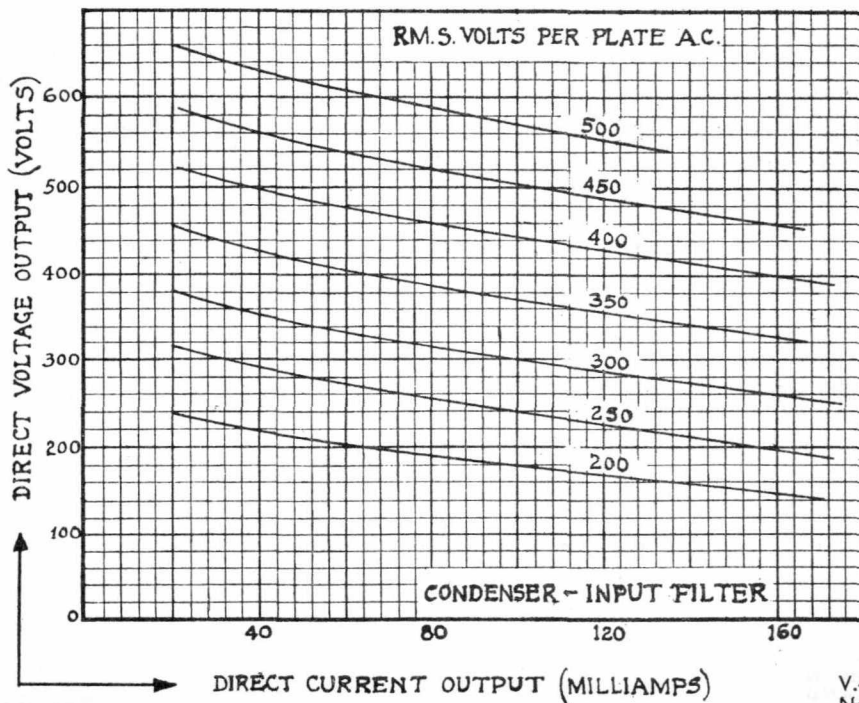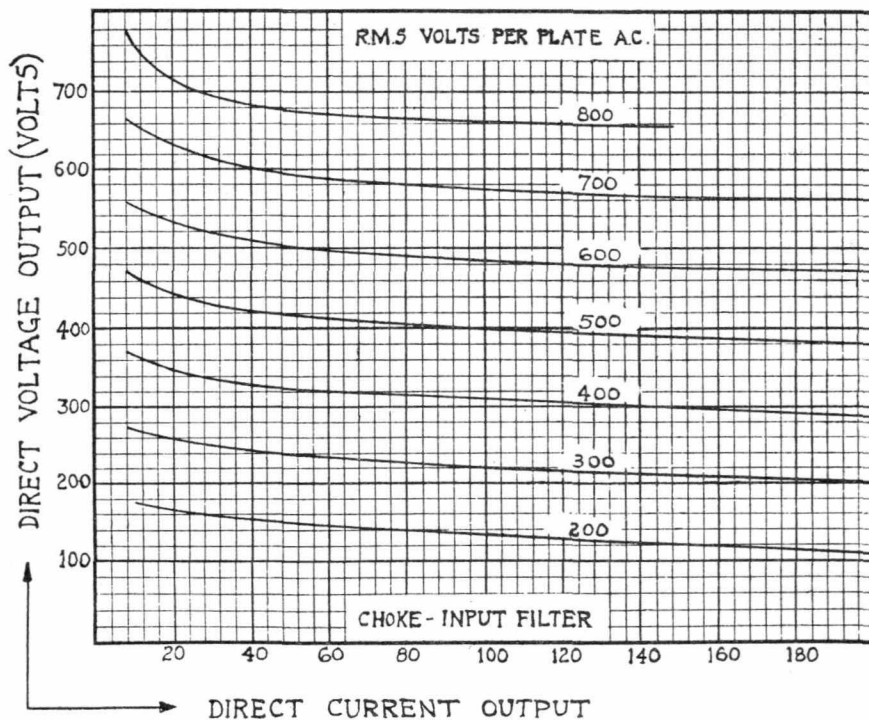

V.4274-A.2
Nov. 1937

PRINTED IN
ENGLAND