


AMPEREX TRANSMITTING TUBE HF-150/211-H

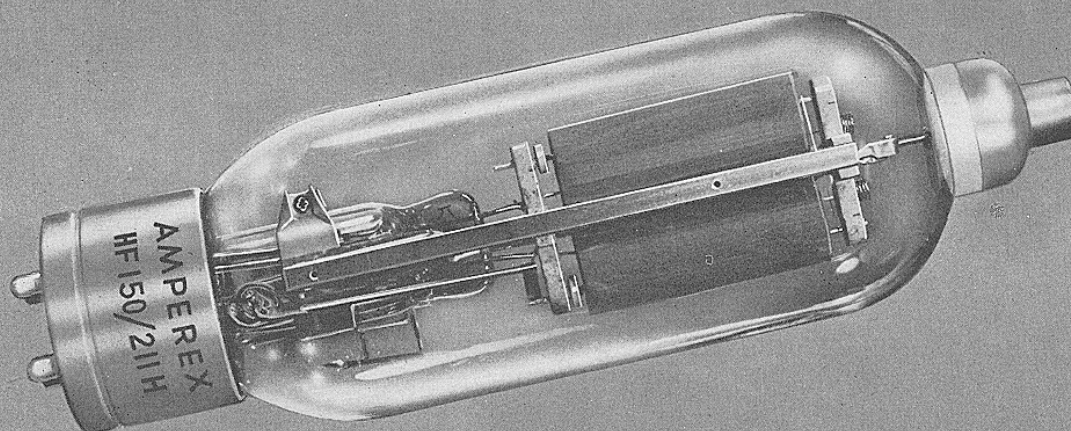

RF Power Amplifier or Oscillator
AF Power Amplifier or Modulator

GENERAL CHARACTERISTICS

RADIATION COOLED TRIODE

ELECTRICAL

Filament	Thoriated Tungsten
Voltage	10-10.5 volts
Current	3.25 amperes
Amplification Factor	12.5
Grid to Plate Transconductance, $I_p = 100$ ma	4300 micromhos
Direct Interelectrode Capacitances	
Grid to Plate	7.2 $\mu\mu\text{f}$
Grid to Filament	5.5 $\mu\mu\text{f}$
Plate to Filament	1.9 $\mu\mu\text{f}$
Frequency for Maximum Ratings	30 megacycles

MECHANICAL

Overall Dimensions	
Maximum Length	9 $\frac{9}{16}$ inches
Maximum Diameter	2 $\frac{11}{16}$ inches
Base	Standard Jumbo 4-Pin Bayonet
Mounting Position—Vertical	Base up or down
Horizontal	Plane of electrodes vertical
Net Weight (approx.)	8 ounces
Shipping Weight (approx.) (one tube)	3 pounds

HF-150 /
211-H

HF-150/211-H—AMPEREX TRANSMITTING TUBE

MAXIMUM RATINGS AND TYPICAL OPERATING CONDITIONS

A.F. Amplifier and Modulator—Class A

	Maximum Rating per Tube	Typical Operation One Tube	
A.C. Filament Voltage		10	10
D.C. Plate Voltage	1500	1200	1500
D.C. Grid Voltage		—70	—97
Peak A.F. Grid Voltage		65	92
D.C. Plate Current (ma)		80	66
Plate Dissipation (watts)	100		
Load Resistance (ohms)		7600	14500
Power Output (watts)		21	30
Distortion (% Second Harmonic)		3	2

A.F. Power Amplifier and Modulator—Class B

	Maximum Rating per Tube	Typical Operation Two Tubes	
A.C. Filament Voltage		10	10
D.C. Plate Voltage	1500	1250	1500
D.C. Grid Voltage		—90	—110
Load Resistance (ohms per tube)		1675	2050
Effective Load Resistance (ohms)		6700	8200
Zero Signal D.C. Plate Current (ma)		50	50
Peak A.F. Grid to Grid Voltage		380	420
Max. Signal D.C. Plate Current (ma)	210	400	400
Max. Signal Plate Input (watts)	315	500	600
Plate Dissipation (watts)	125	180	200
Max. Signal Driving Power (approx.) (watts)		4.5	5
Max. Signal Plate Power Output (watts)		320	400

R.F. Power Amplifier—Class B—Telephony

(Carrier conditions for use with modulation factor of 1.0)

	Maximum Rating per Tube	Typical Operation One Tube	
A.C. Filament Voltage		10	10
D.C. Plate Voltage	1500	1250	1500
D.C. Grid Voltage		—85	—110
Peak R.F. Grid Voltage		105	120
D.C. Plate Current (ma)	150	120	120
Plate Input (watts)	185	150	180
D.C. Grid Current (approx.) (ma)		.5	.2

(continued from previous column)

Plate Dissipation (watts)	125	100	118
Driving Power at Peak Modulation (approx.) (watts)		2.5	3.5
Plate Power Output (watts)		50	62.5
Frequency Limit for Above Operation (mc)	30		
F.C.C. Rating (for use in final stage of Broadcast Transmitters) (watts)	50		

Plate Modulated R.F. Power Amplifier

Class C—Telephony

(Carrier conditions for use with modulation factor of 1.0)

	Maximum Rating per Tube	Typical Operation One Tube	
A.C. Filament Voltage		10.5	10.5
D.C. Plate Voltage	1250	1000	1250
D.C. Grid Voltage	—400	—250	—300
Peak R.F. Grid Voltage		380	430
D.C. Plate Current (ma)	175	170	166
Plate Input (watts)	220	170	207
D.C. Grid Current (approx.) (ma)	50	10	8
Plate Dissipation (watts)	85	55	59
Driving Power (approx.) (watts)		3.5	3.5
Plate Power Output (watts)		115	148
Frequency Limit for Above Operation (mc)	30		
F.C.C. Rating (for use in final stage of Broadcast Transmitters) (watts)	125		

R.F. Power Amplifier and Oscillator




Class C—Telegraphy

	Maximum Rating per Tube	Typical Operation One Tube	
A.C. Filament Voltage		10	10
D.C. Plate Voltage	1500	1250	1500
D.C. Grid Voltage	—400	—250	—300
Peak R.F. Grid Voltage		385	440
D.C. Plate Current (ma)	210	200	200
Plate Input (watts)	315	250	300
D.C. Grid Current (approx.) (ma)	50	10	10
Plate Dissipation (watts)	125	80	80
Driving Power (approx.) (watts)		3.5	4
Plate Power Output (watts)		170	220
Frequency Limit for Above Operation (mc)	30	30	30

**HF-150 /
211-H**


A graph showing the relationship between Plate Current (Y-axis, 0 to 200+ milliamperes) and Plate Voltage (X-axis, 0 to 3000 volts) for a 6X4 tube. The graph displays several curves for different grid voltages: 0, -40, -80, -120, -160, and -200. The curves show that plate current increases with plate voltage and decreases as the grid voltage becomes more negative.

Plate Voltage (V)	Grid 0 (mA)	Grid -40 (mA)	Grid -80 (mA)	Grid -120 (mA)	Grid -160 (mA)	Grid -200 (mA)
0	0	0	0	0	0	0
500	100	50	20	10	5	2
1000	180	120	60	30	15	8
1500	220	160	90	45	25	12
2000	240	180	110	55	30	15
2500	250	190	120	60	35	18
3000	255	195	125	65	40	20

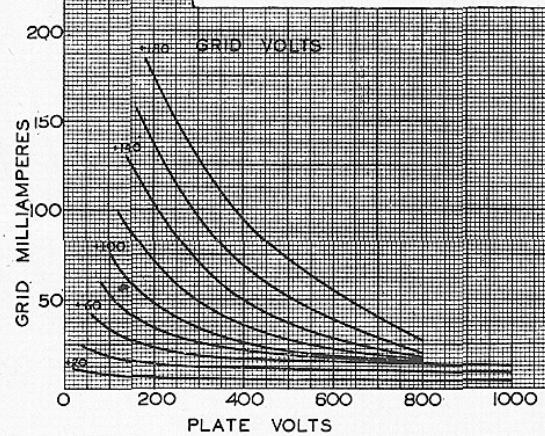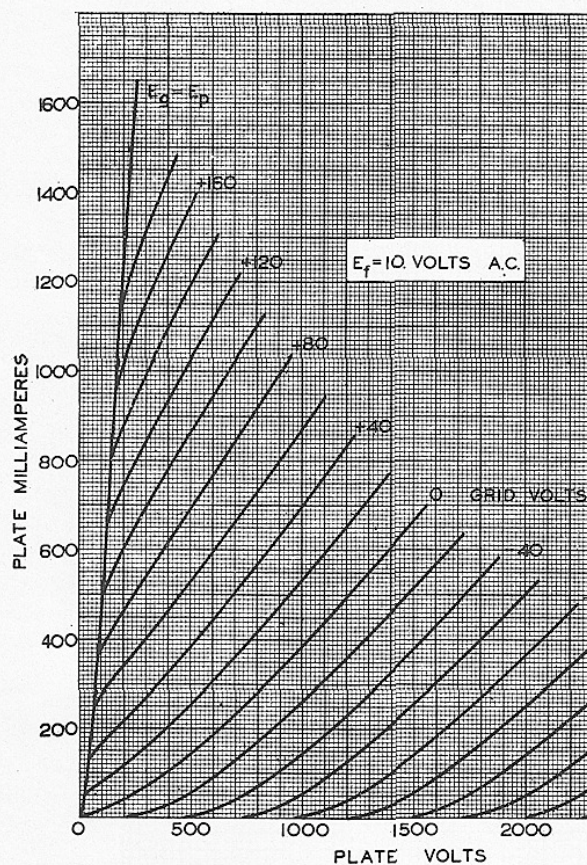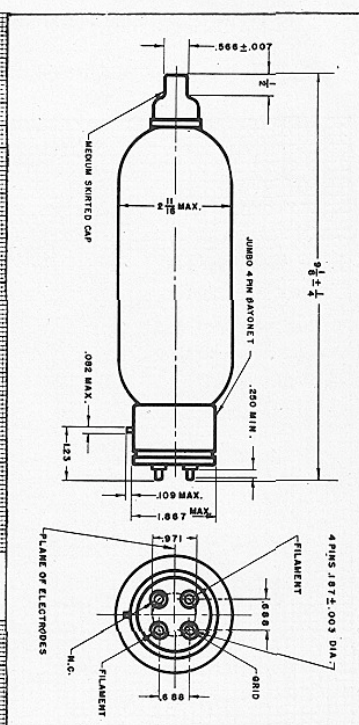

HF-150 /
211-H

HF-150/211-H-AMPEREX TRANSMITTING TUBE

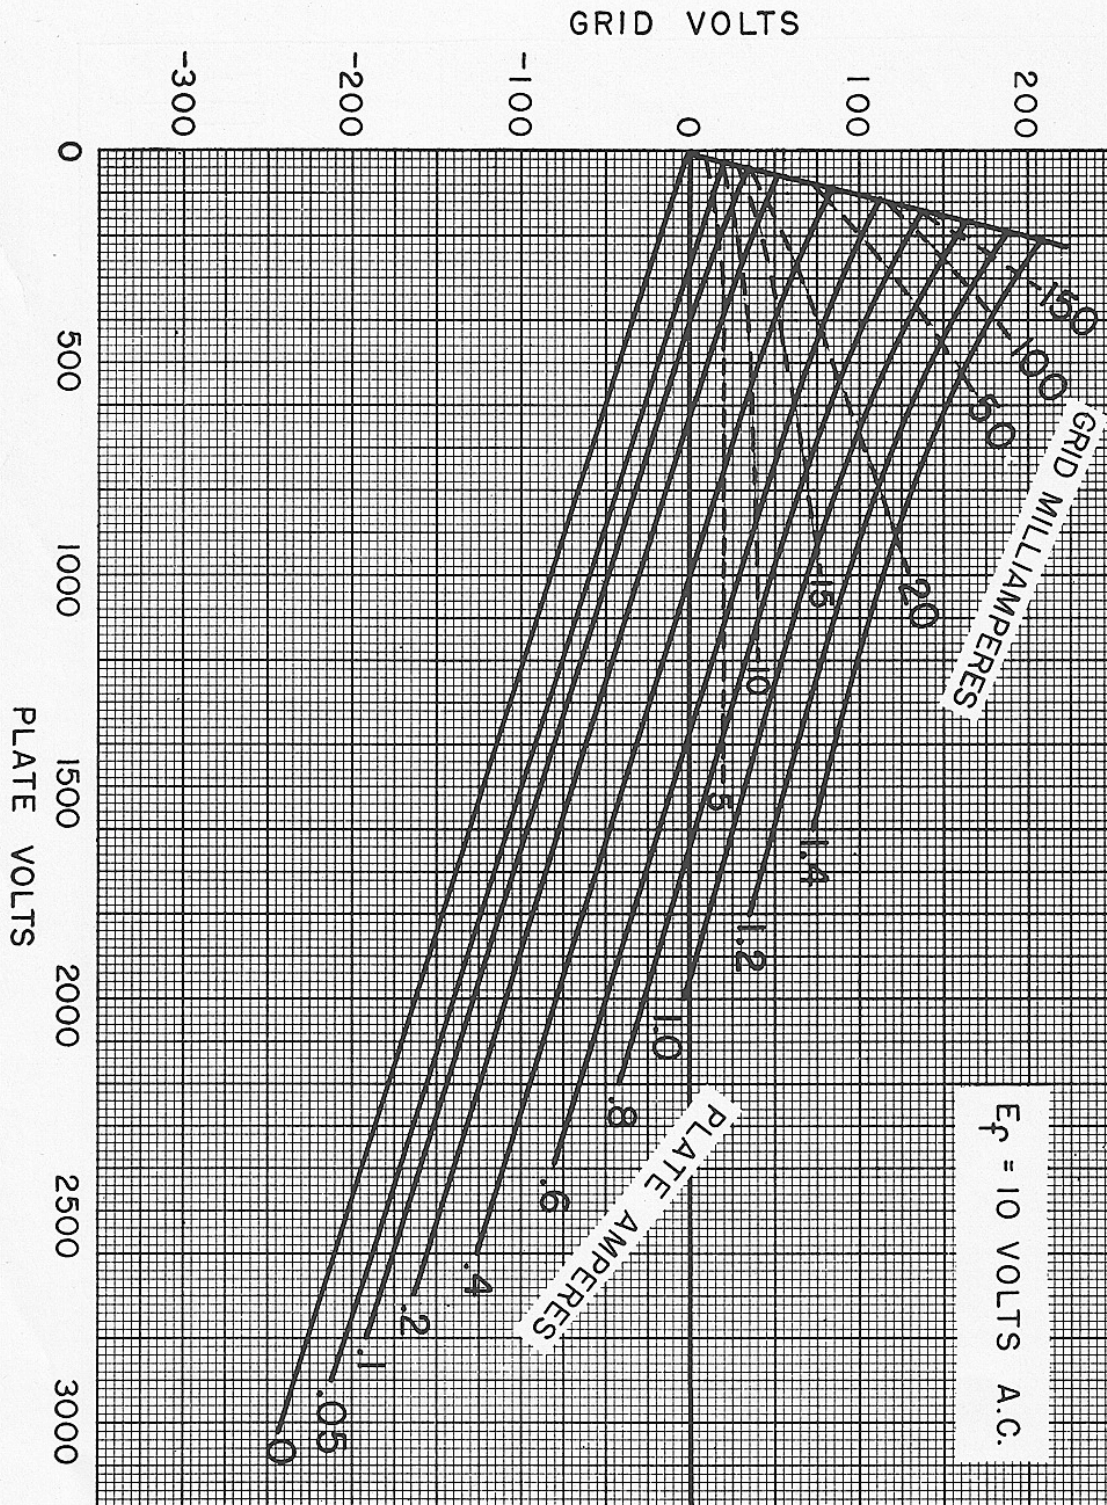

HF-150 /
211-H