

Beam Power Tube

CERMOLOX

17 kW Pulsed RF Output

Matrix Cathode

Full Input to 1215 MHz

Forced-Air Cooled

UHF Pulsed RF Amplifier

For Use In Airborne, Shipboard, Mobile,
Stationary Equipment

ELECTRICAL

Heater^a

Type	Matrix, Oxide Coated Unipotential Cathode	
Voltage (ac or dc)	6.3	V
Current at 6.3 V	3.2	A
Minimum heating time	60	s

MAXIMUM RATINGS, Absolute-Maximum Values

For frequencies up to 1215 MHz and for a maximum "ON" time as specified in any 1000-microsecond interval.

Peak Positive-Pulse Plate Voltage	7000	V
DC Plate Voltage	4000	V
DC or Peak Positive-Pulse		
Grid-No. 2 Voltage	1000	V
Negative Pulse Grid-No. 1 Voltage	200	V
DC Plate Current During Pulse		
With 5-microsecond "ON" time	6	A
DC Plate Current		
With 5-microsecond "ON" time	0.050	A
Plate Dissipation (Average)	125	W
Useful Peak Power Output		
With 5-microsecond "ON" time	17000	W

MECHANICAL

Operating Position	Any
Weight (Approx.)	2 oz (0.06 kg)

THERMAL^b

Seal Temperature	250 max.	°C
Radiator Core	250 max.	°C

^aSee *Electrical Considerations-Filament or Heater*, under *RCA Transmitting Tube Operating Considerations* given at front of this section.

^bSee *Dimensional Outline* for temperature measurement points.

^cKeep all stippled regions clear. Do not allow contacts or circuit components to protrude into these annular regions.


Detailed performance and application information is available through your RCA Sales Office, Distributor, or write to RCA Commercial Engineering, Harrison, N.J. 07029.



Electronic
Components

DATA
9-68

DIMENSIONAL OUTLINE

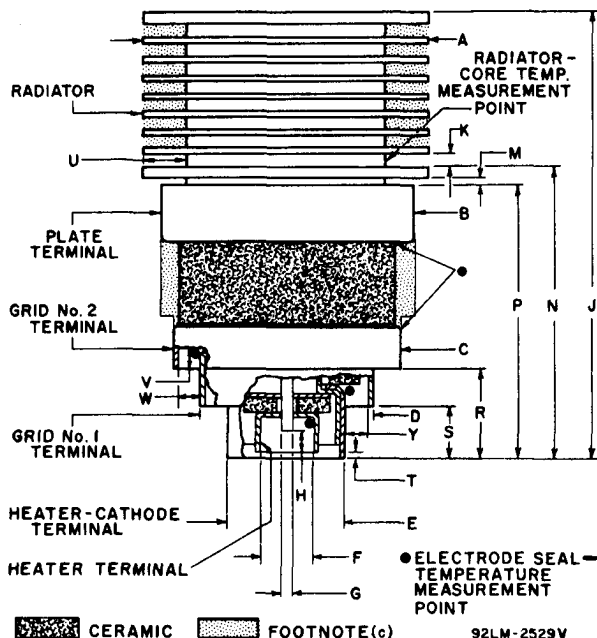

DIMENSION	INCHES	MILLIMETERS	DIMENSION	INCHES	MILLIMETERS
A Dia.	$1.250 \pm .015$	$31.75 \pm .38$	M	0.035 Min.	0.89 Min.
B Dia.	$1.100 \pm .015$	$27.94 \pm .38$	N	$1.335 \pm .045$	33.91 ± 1.14
C Dia.	$1.000 \pm .015$	$25.40 \pm .38$	P	$1.230 \pm .030$	$31.22 \pm .76$
D Dia.	$0.750 \pm .015$	$19.05 \pm .38$	R	$0.370 \pm .020$	$9.40 \pm .50$
E Dia.	$0.500 \begin{smallmatrix} +.017 \\ -.020 \end{smallmatrix}$	$12.70 \begin{smallmatrix} +.43 \\ -.50 \end{smallmatrix}$	S	$0.175 \pm .015$	$4.45 \pm .38$
F Dia.	$0.250 \pm .010$	$6.35 \pm .25$	T	$0.025 \pm .025$	$0.64 \pm .63$
G Dia.	0.070 Max.	1.78 Max.	U	0.200 Min.	5.08 Min.
H	0.054 Min.	1.37 Min.	V	0.060 Min.	1.52 Min.
J	$2.080 \pm .050$	52.8 ± 1.2	W	0.090 Min.	2.29 Min.
K	0.050 Min.	1.27 Min.	X	0.120 Min.	3.05 Min.
			Y	0.095 Min.	2.41 Min.