



High vacuum HALF-WAVE RECTIFIER
 REDRESSEUR MONOPLAQUE à vide poussé
 Hochvakuum EINWEGGLEICHRICHTER

Heating: direct by A.C.;
 parallel supply
 Chauffage: direct par C.A.; $V_f = 4 \text{ V}$
 alimentation en parallèle $I_f = 1,3 \text{ A}$
 Heizung: direkt durch Wechselstrom;
 Parallelspeisung

Dimensions in mm
 Dimensions en mm
 Abmessungen in mm





Operating conditions and limiting values
 Caractéristiques d'utilisation et limites
 Betriebs- und Grenzwerte

$V_{tr} = \text{max. } 1000 \text{ V}_{eff}$
 $I_o = \text{max. } 75 \text{ mA}$

$R_t = \text{min. } 200 \Omega$
 $C = \text{max. } 12 \mu\text{F}$

4646

"Miniwatt"

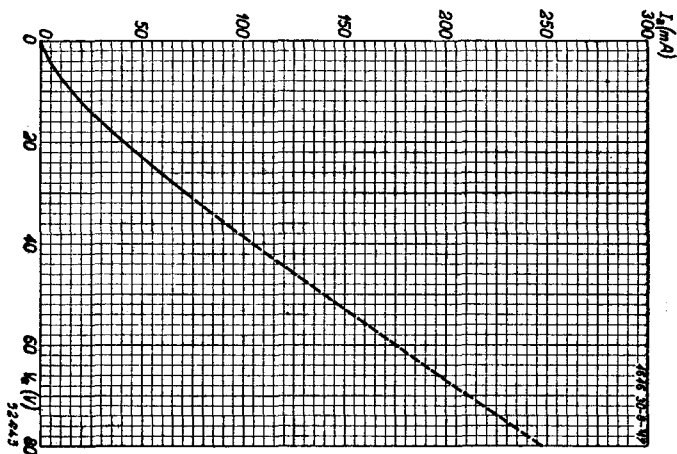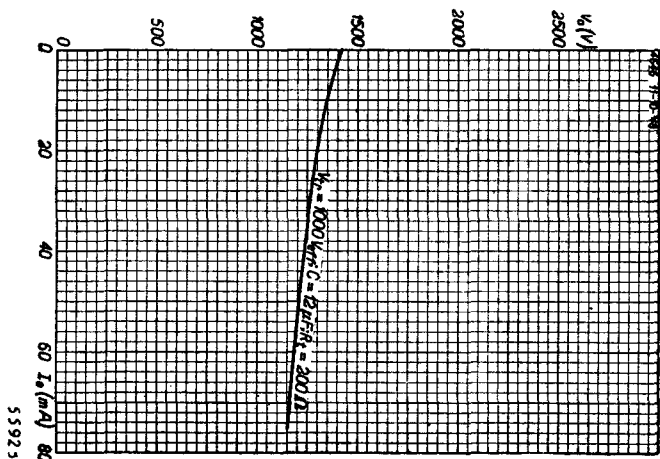



	4646	
page	sheet	date
1	1	1948.09.15
2	2	1948.11.08
3	FP	1999.06.07