



Gasfilled FULL WAVE RECTIFYING VALVE
 TUBE REDRESSEUR BIPLAQUE à gaz
 Gasgefüllte VOLLWEGGLEICHRICHTERRÖHRE

Heating: direct by A.C.
 Chauffage: direct par C.A.
 Heizung: direkt durch Wechselstrom

$V_f = 4,0 \text{ V}$

$I_f = 2,4 \text{ A}$

Dimensions in mm
 Dimensions en mm
 Abmessungen in mm



Operating conditions and limiting values
 Caractéristiques d'utilisation et limites
 Betriebs - und Grenzdaten

$V_{tr} = \text{max. } 2 \times 500 \quad V_{eff}$

$I_o = \text{max. } 125 \text{ mA}$

$V_{arc} = \text{max. } 15 \text{ V}$

$R_t = \text{min. } 100 \quad \text{min. } 150 \quad \text{min. } 200 \quad \Omega$

$C = \text{max. } 16 \quad \text{max. } 32 \quad \text{max. } 64 \quad \mu F$

$V_o(V)$

1200 4652/AX I 5-3-43

1000

800

600

400

200


0

50

100

150

200

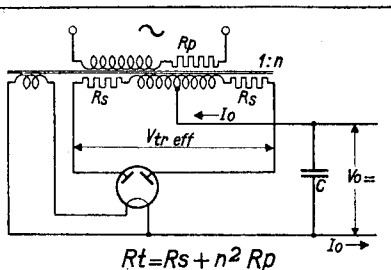

$V_{tr\ eff} = 2 \times 500V; C = 16\mu F$

$R_t = 100\Omega$

$R_t = 200\Omega$

$R_t = 400\Omega$


$R_t = 800\Omega$

53039

4652

"Miniwatt"

AXI

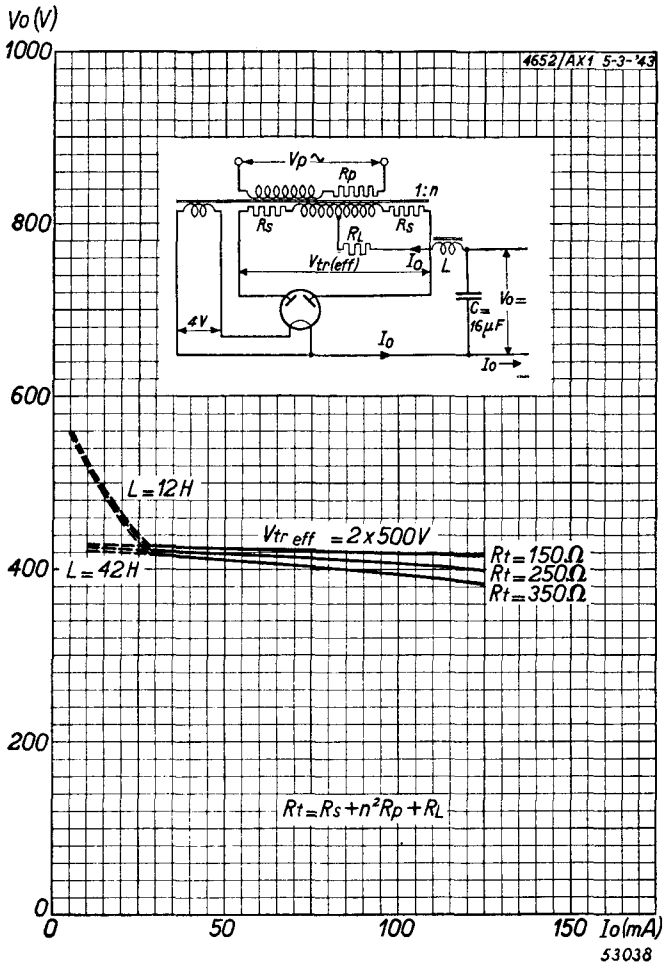



	4652	
page	sheet	date
1	1	1949.04.15
2	2	1948.05.01
3	3	1948.05.01
4	FP	1999.06.07