




MINIATURE TRIODE-HEXODE 6·3v INDIRECTLY HEATED

X79
OCTOBER, 1951

A frequency changer for operation up to 100 Mc/s.

BASE CONNECTIONS AND VALVE DIMENSIONS



View from underside
of base.

Base : B9A

Bulb : Tubular.

Overall length : 49—55 mm.

Seated length : 43—49 mm.

Max. diameter : 22 mm.

RATING

V_h	6·3	V
I_h	0·3 approx.	A
V_{ah}	250 max.	V
$V_{g2, g4}$	100 max.	V
V_{at}	100 max.	V
I_k	20 max.	mA
$v_{gt} \text{ (pk)}$	10 opt.	V

TRIODE SECTION ONLY

At $V_a = 100$, $V_g = 0$

I_a	10	mA
μ	22	
g_m	2·8	mA/V

CAPACITANCES (of unscreened valve)

C_{g1-ah}	0·11	pF	C_{g1-all}	4·1	pF
C_{g1-at}	0·08	pF	$C_{at-all} \text{ (gt earthed)}$	1·5	pF
C_{g1-gt}	0·22	pF	$C_{gt-all} \text{ (at earthed)}$	5·47	pF
C_{gt-at}	1·48	pF	C_{ah-all}	4·34	pF

TYPICAL OPERATION

V_a	250	V
$V_{g2, g4}$	75	V
V_{at}	100	V
$v_{gt} \text{ (pk)}$	10	V
V_{g1}	0	V
I_a	4·5	mA
$I_{g2, g4}$	3·4	mA
I_{at}	4·5	mA
g_c	780 at $V_{g1}=0$	$\mu A/V$
g_c	7·8 at $V_{g1}=-21$	$\mu A/V$
Z_c	0·7 at $V_{g1}=0$	M Ω
R_{gt-k}	0·05	M Ω
* r_{g1-k}	3500	Ω
* C_{g1-k}	6	pF
† r_{g1-k}	150	k Ω
$\left. \begin{array}{l} * \text{ at : } V_{ah} = 175, \\ \dagger \text{ at : } V_{ah} = 175, \end{array} \right\} \begin{array}{l} V_{g2, g4} = 75, \\ V_{g2, g4} = 75, \end{array} \left\{ \begin{array}{l} V_{g1h} = 0, \\ V_{g1h} = 0, \end{array} \right. \left\{ \begin{array}{l} f = 45 \text{ Mc/s.} \\ v_{gt, g3} \text{ (pk)} = 10 \end{array} \right.$		

MARCONI'S WIRELESS TELEGRAPH COMPANY LIMITED

Head Office: Marconi House, Chelmsford . Telephone: Chelmsford 3221 . Telegraphic Address: Expanse, Chelmsford

X79

SCREENING

No internal or external screening is fitted to the valve. A separate screening can should be used.

MICROPHONY

Although this is of a very low order, equipment should be designed to minimise microphony.

RETAINING


A retaining device should be used.


VENTILATION


No special precautions.


MOUNTING

Any position.

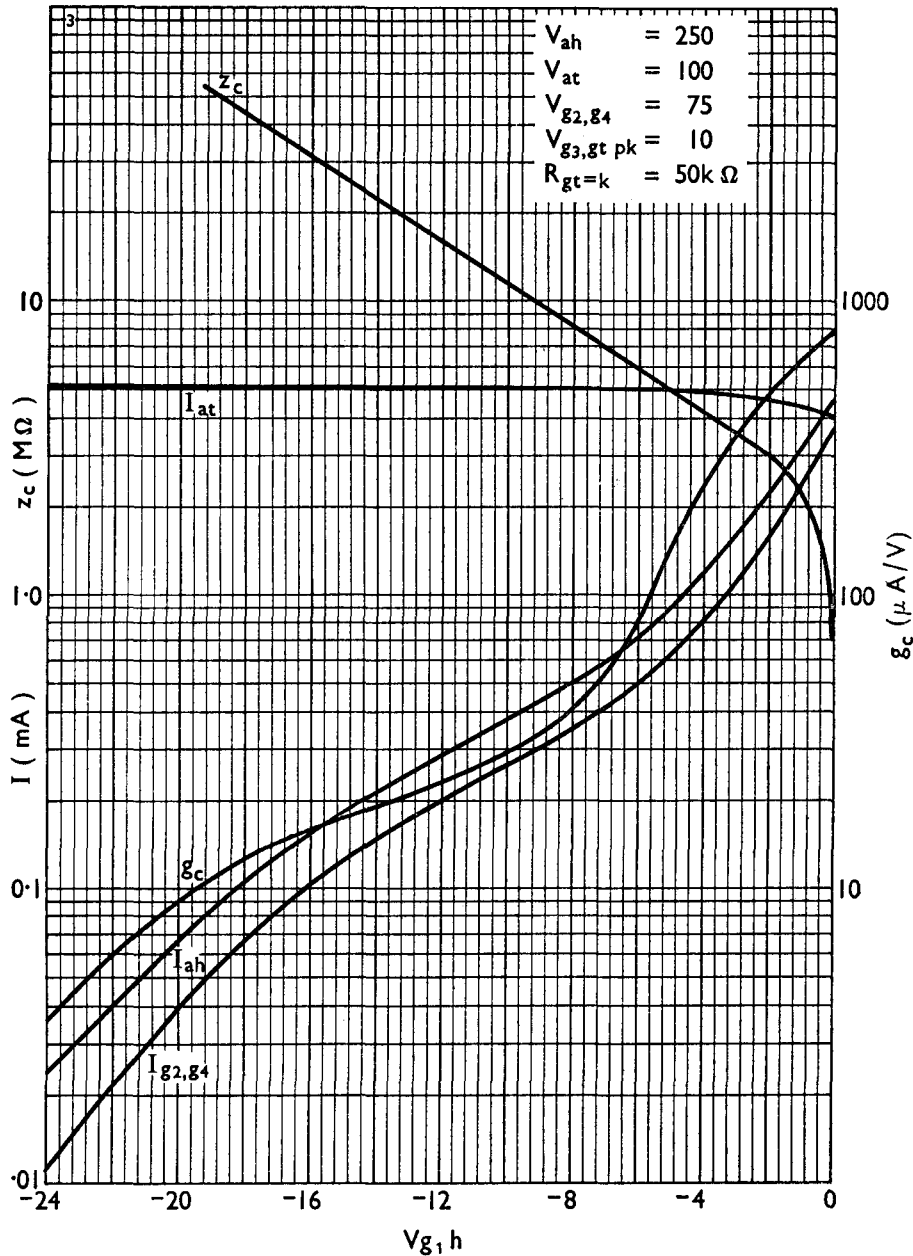

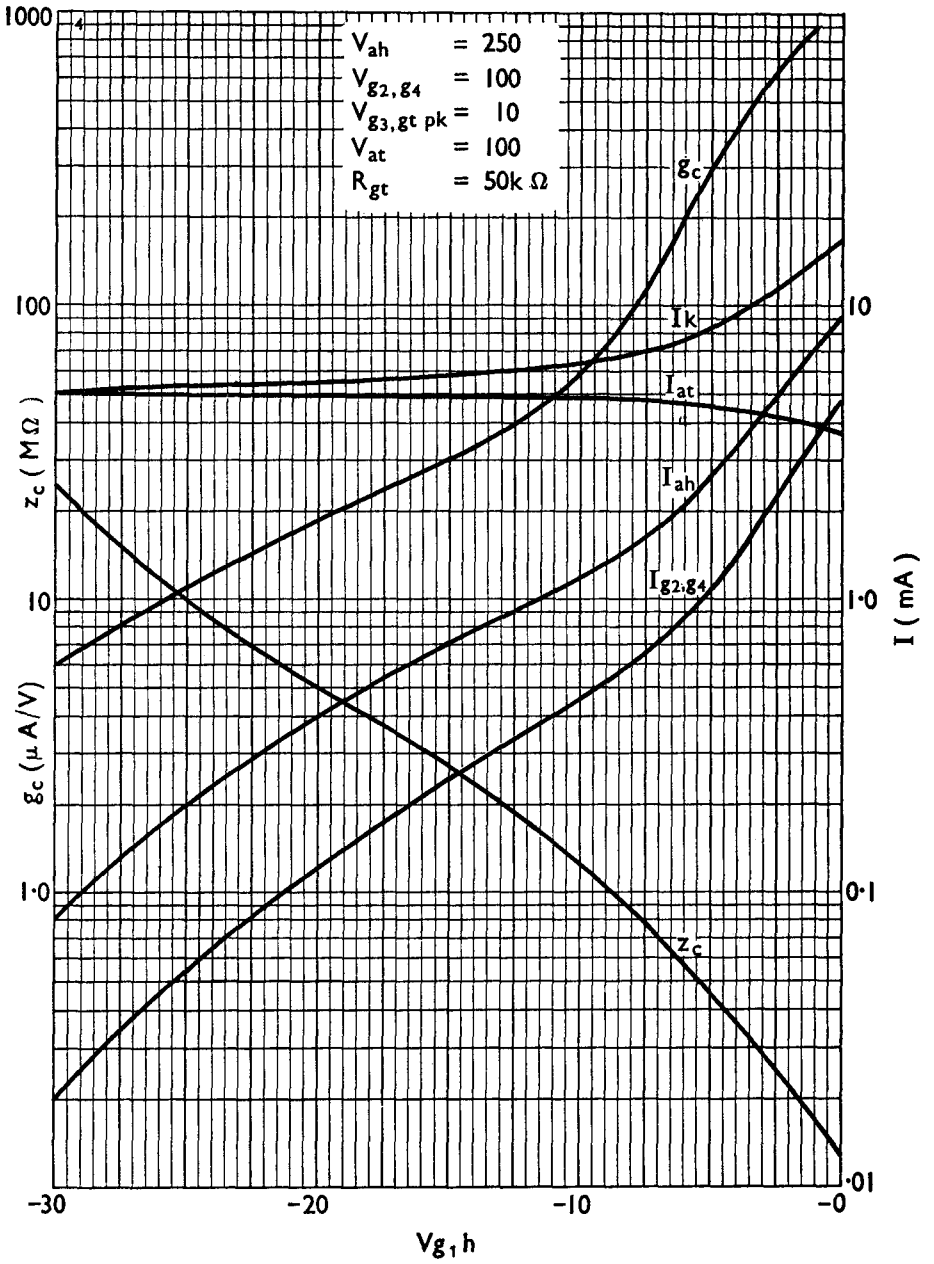

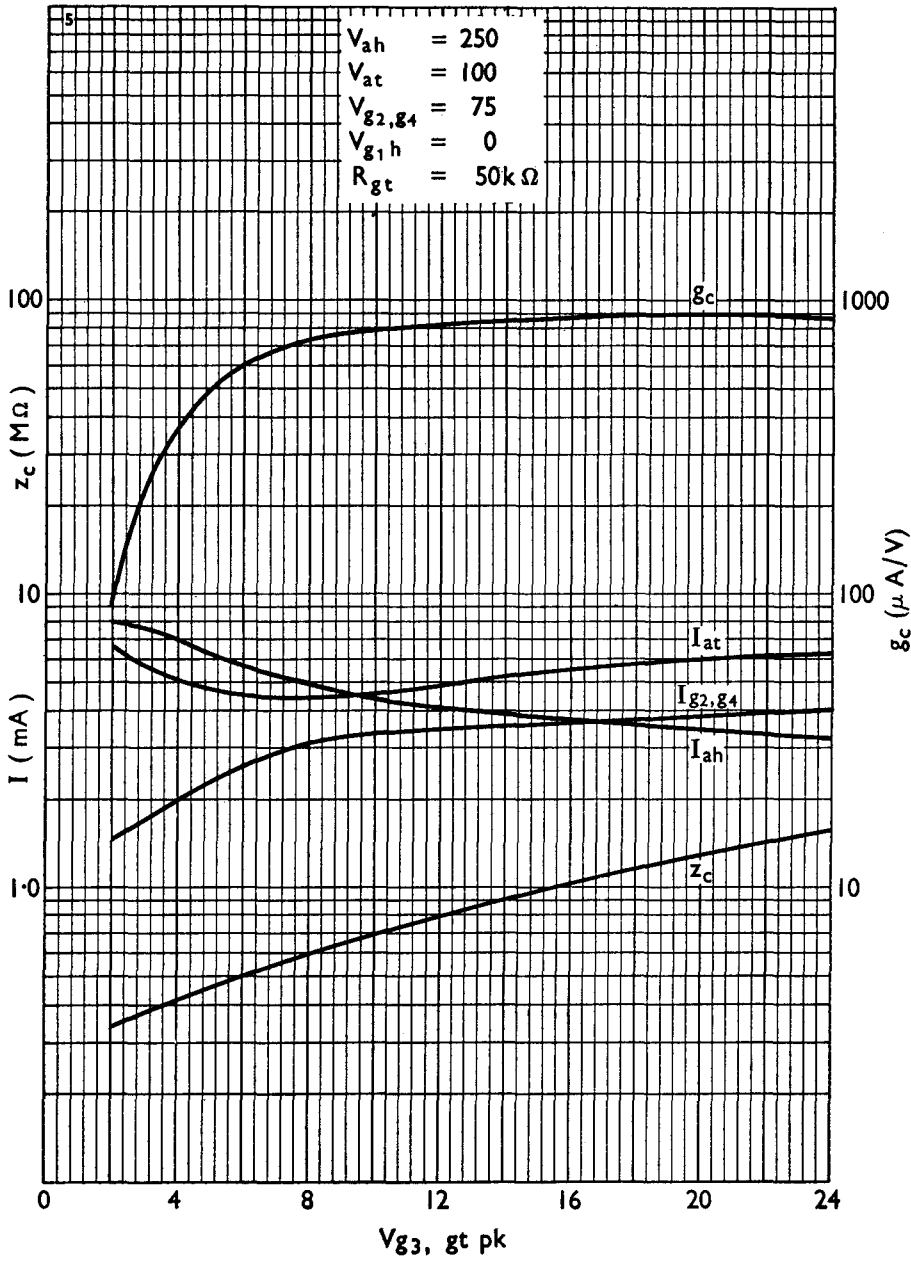

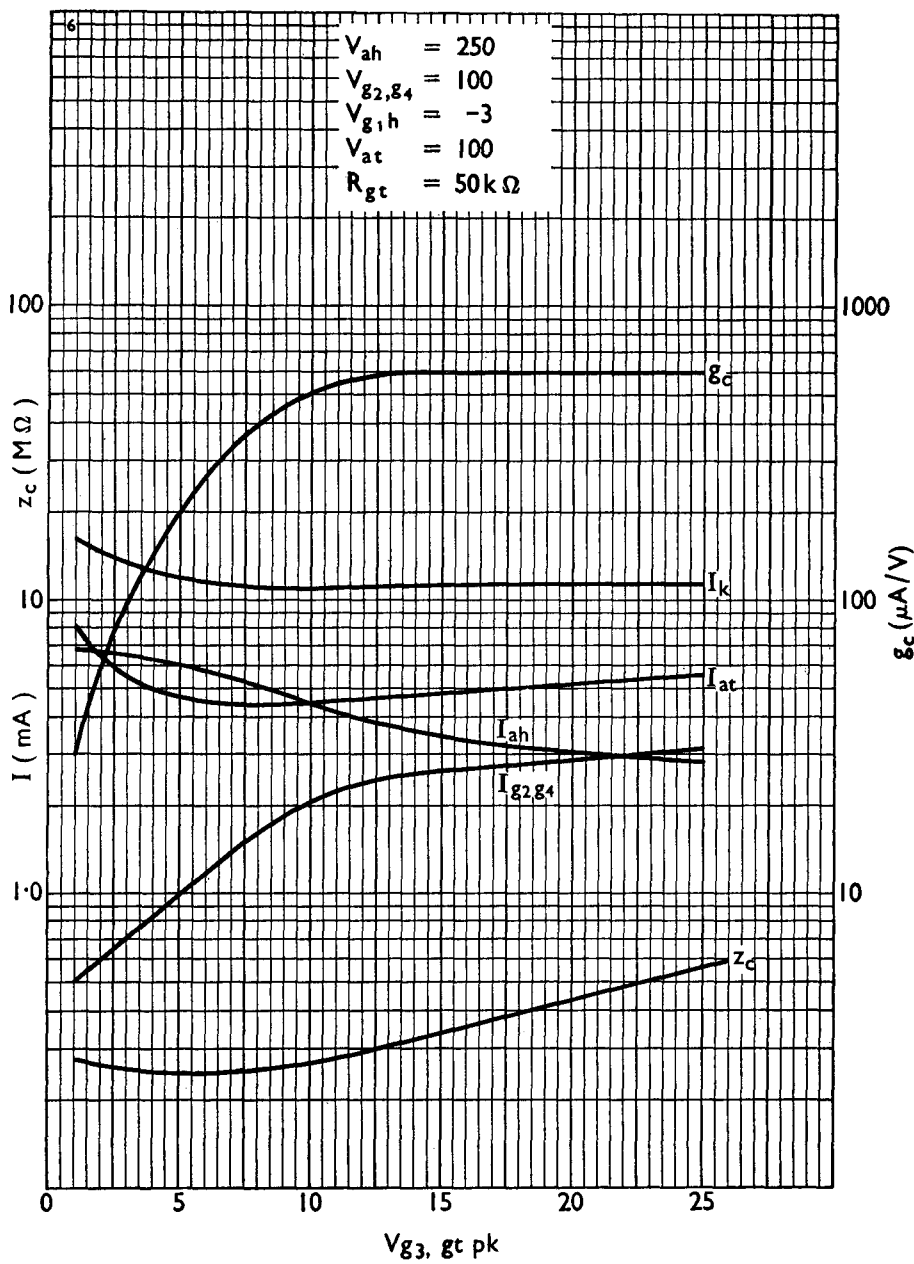

X79

