

TRIODE & FRAME-GRID PENTODE CONVERTER TYPES 4GX7, 5GX7, 6GX7 AND 8GX7

The 4GX7, 5GX7, 6GX7 and 8GX7 are medium-mu triode and sharp-cutoff frame-grid pentode types designed for oscillator-mixer service in V.H.F. television tuners. The pentode section features high transconductance and low grid 1-to-plate capacitance to ensure high gain with good stability in amplifier operation.



The 4GX7, 5GX7 and 8GX7 feature controlled heater warm-up time and render reliable service in properly designed series heater circuits.

ELECTRICAL

Cathodes	Coated Unipotential				
Heater:	4GX7	5GX7	6GX7	8GX7	
Voltage	4.2	5.6	6.3	7.7	Volts
Current	0.60	0.45	0.40	0.30	Amps
Warm-Up Time (Note 1)	11	11	—	11	Seconds
Direct Interelectrode Capacitances: Shielded (Note 2)					
Triode:					
Grid to Plate					1.2 pf
Input					2.3 pf
Output					1.9 pf
Pentode:					
Grid 1 to Plate					0.005 pf
Input					5.40 pf
Output					3.30 pf
Grid 1 to Grid 2					1.6 pf

MECHANICAL

Bulb	T-6½
Base	Miniature 9-Pin (JEDEC E9-1)
Outline	6-2
Basing	9QA
Mounting Position	Any

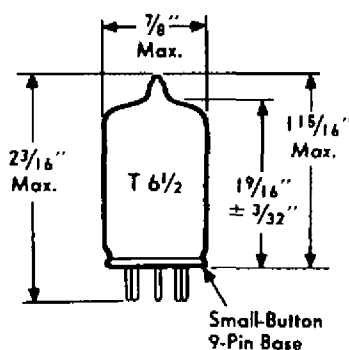

RATINGS

Design Maximum Values

	Triode	Pentode	
Plate Voltage	275	275	max. Volts
Grid 2 Supply Voltage	—	275	max. Volts
Grid 2 Voltage	—	See Grid 2 Input Rating Curve	
Plate Dissipation	1.5	2.2	max. Watts
Grid 2 Dissipation	—	0.45	max. Watts
Positive Grid 1 Voltage	0	0	max. Volts
Negative Grid 1 Voltage	40	40	max. Volts
Cathode Current	20	20	max. Ma.
Grid 1 Circuit Resistance			
Fixed Bias	0.5	0.25	max. Megohm
Cathode Resistor Bias	1.0	0.5	max. Megohm
Heater-Cathode Voltage:			
Heater Negative with Respect to Cathode			
Total DC + Peak	200	200	max. Volts
Heater Positive with Respect to Cathode			
DC Component	100	100	max. Volts
Total DC + Peak	200	200	max. Volts

CHARACTERISTICS AND TYPICAL OPERATION

Triode Unit:

Plate Voltage	100	125	Volts
Grid Voltage	—	-1.0	Volts
Grid Circuit Resistance	0.1	—	Megohm
Amplification Factor	—	40	—
Plate Resistance	—	4700	Ohms
Transconductance	8700	8500	μmhos
Plate Current	12.5	13	Ma.
Grid Cutoff Voltage (Note 3)	-6.0	—	Volts

Pentode Unit:


Plate Voltage	120	125	Volts
Grid 2 Voltage	90	125	Volts
Grid 1 Voltage	—	-1.0	Volts
Grid 1 Circuit Resistance	0.1	—	Megohms
Plate Resistance	—	200000	Ohms
Transconductance	13000	11000	μmhos
Plate Current	8.5	8.0	Ma.
Grid 2 Current	2.8	2.5	Ma.
Grid 1 Cutoff Voltage (Note 3)	-2.5	—	Volts

NOTES

1. Heater Warm-Up Time is defined as the time required for the voltage across the heater to reach 80% of its rated value after applying 4 times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to 3 times rated heater voltage divided by rated heater current.
2. With external shield connected to cathode.
3. For a plate current of 20 microamperes.

4GX7
5GX7
6GX7
8GX7

Westinghouse

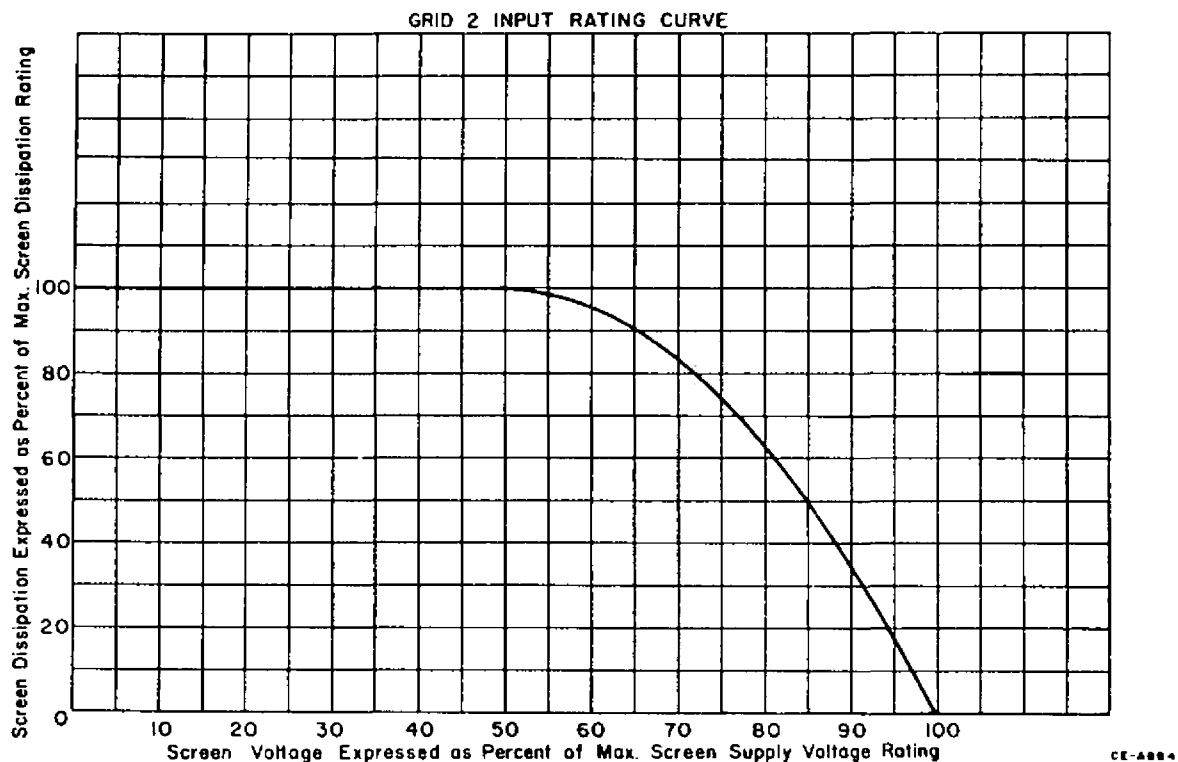

The information contained herein is supplied without assuming responsibility for infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Westinghouse Electric Corporation.

WESTINGHOUSE ELECTRIC CORPORATION, ELECTRONIC TUBE DIVISION, ELMIRA, NEW YORK