

CHARACTERISTICS

GENERAL DATA

Focusing Method	Electrostatic
Deflection Method	Electrostatic
Types*	
4VP1	Fluorescence Green — Persistence Medium
4VP2	Blue-Green Green Long
4VP7	Blue-White Yellow Long
4VP11	Blue — Short

Faceplate Spherical, Clear

**In addition to the types shown, the 4VP- can be supplied with several screen phosphors.*

ELECTRICAL DATA

Heater Voltage	6.3 Volts
Heater Current	$0.6 \pm 10\%$ Amperes
Direct Interelectrode Capacitances (Approx.)	
Cathode to All Other Electrodes	$5\ \mu\mu f$
Grid No. 1 to All Other Electrodes	$6.5\ \mu\mu f$
Between Deflecting Plates 1-2 ¹¹	$2\ \mu\mu f$
Between Deflecting Plates 3-4 ¹¹	$2\ \mu\mu f$
Deflecting Plate 1 to All Other Electrodes	$7.5\ \mu\mu f$
Deflecting Plate 2 to All Other Electrodes	$6\ \mu\mu f$
Deflecting Plate 3 to All Other Electrodes	$5.5\ \mu\mu f$
Deflecting Plate 4 to All Other Electrodes	$6.5\ \mu\mu f$

MECHANICAL DATA

Minimum Useful Screen (Rounded Corners)	27/8 x 27/8 Inches
Bulb Contact (Recessed Small Ball Cap)	J1-22
Bulb	LEA 467 or Equivalent
Weight (Approx.)	1 1/2 Pounds
Base (Small Shell Duodecal 12-Pin)	B12-43
Basing	12EP
Base Alignment	
D1-D2 Trace Aligns with Base Key and Tube Axis ⁶	±10 Degrees
Positive Voltage on D1 Deflects Beam Approx.	
Toward Base Key	
Positive Voltage on D3 Deflects Beam Approx.	
Toward Pin No. 9	
Bulb Contact Alignment	
J1-22 Contact Aligns with D1-D2 Trace	±10 Degrees
J1-22 Contact on Same Side as Base Key	
Trace Alignment	
Angle between D1-D2 and D3-D4 Trace	90 ± 2 Degrees
D1-D2 Trace Aligns with Bulb Wall	±1.5 Degrees



RATINGS

MAXIMUM RATINGS (Absolute Maximum Values)

Anode No. 2 Input	6 Watts
Anode No. 3 Voltage	5500 Volts dc
Anode No. 2 Voltage	2750 Volts dc
Ratio of Anode No. 3 Voltage to Anode No. 2 Voltage ¹	2:1
Anode No. 1 Voltage (Focusing Electrode)	1100 Volts dc
Grid No. 1 Voltage	
Negative Bias Value	200 Volts dc
Positive Bias Value	0 Volts dc
Positive Peak Value	0 Volts
Peak Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	180 Volts
Heater Positive with Respect to Cathode	180 Volts
Peak Voltage Between Anode No. 2 and Any Deflecting Plate	600 Volts

QUICK REFERENCE DATA

3 1/2" x 3 1/2" Direct Viewed
Square Glass Type
Spherical Clear Faceplate
Electrostatic Focus
Electrostatic Deflection
Post Deflection Acceleration

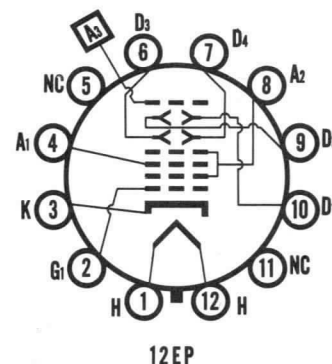

**SYLVANIA
ELECTRONIC TUBES**

A Division of
Sylvania Electric Products Inc.

PICTURE TUBE
OPERATIONS
SENECA FALLS, NEW YORK

Prepared and Released By The
TECHNICAL PUBLICATIONS SECTION
EMPORIUM, PENNSYLVANIA

MARCH, 1963

PAGE 1 OF 3

File Under

SPECIAL AND GENERAL PURPOSE CATHODE RAY TUBES

TYPICAL OPERATING CONDITIONS

Anode No. 3 Voltage	4000 Volts
Anode No. 2 Voltage	2000 Volts
Anode No. 1 Voltage for Focus	200 to 500 Volts
Grid No. 1 Voltage Required for Cutoff ²	-58 to -135 Volts
Deflection Factor	
Deflecting Plates 1-2	98 to 132 Volts dc/Inch
Deflecting Plates 3-4	72 to 98 Volts dc/Inch
Modulation at $I_{b3} = 25 \mu a^3$	30 Volts dc/ Max.
Line Width "A" at $I_{b3} = 25 \mu a^3$	.45 mm Max.
Line Width "B" at $I_{b3} = 25 \mu a^3$	.55 mm Max.
Light Output at $I_{b3} = 25 \mu a^3$	
P1	25 Ft. L Min.
Deflection Factor Uniformity ³	3 Percent Max.
Undelected Spot Position ⁴	Within a 10 mm Square
Useful Scan	2 $\frac{7}{8}$ Inches Min.

CIRCUIT VALUES

Grid No. 1 Circuit Resistance	1.5 Megohms Max.
Deflection Circuit Resistance ⁵	1.0 Megohms Max.

NOTES:

1. This tube is designed for optimum performance when operated at an E_{b3}/E_{b2} ratio of 2.0. Operation of other ratios of E_{b3}/E_{b2} may result in changes of deflection uniformity and pattern distortion.
2. Visual extinction of undeflected focused spot.
3. Measured in accordance with MIL-E-1.
4. Centered with respect to the tube face and with the tube shielded. Connect free deflection electrodes to accelerator.
5. It is recommended that the deflection electrode circuit resistances be approximately equal.
6. Deflecting plates D1 and D2 are nearer the screen while deflecting plates D3 and D4 are nearer the base.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

OUTLINE

