
TUNG-SOL

BEAM PENTODE




GLASS BULB

COATED UNIPOTENTIAL CATHODE

HEATER
50 VOLTS 0.15 AMP.
AC OR DC

ANY MOUNTING POSITION



BOTTOM VIEW

INTERMEDIATE SHELL
7 PIN OCTAL

7AC

THE 50L6GT IS DESIGNED FOR SERVICE IN THE OUTPUT STAGE OF AC/DC RECEIVERS. IT DELIVERS A HIGH POWER OUTPUT WITH HIGH POWER SENSITIVITY FROM LOW SUPPLY VOLTAGES.

RATINGS

INTERPRETED ACCORDING TO DESIGN CENTER SYSTEM

HEATER VOLTAGE	50	VOLTS
MAXIMUM PLATE VOLTAGE	200	VOLTS
MAXIMUM GRID #2 VOLTAGE	125	VOLTS
MAXIMUM PLATE DISSIPATION	10	WATTS
MAXIMUM GRID #2 DISSIPATION	1.25	WATTS
MAXIMUM GRID #1 CIRCUIT RESISTANCE (FIXED BIAS)	0.1	MEGOHM
MAXIMUM GRID #1 CIRCUIT RESISTANCE (SELF BIAS)	0.5	MEGOHM
MAXIMUM HEATER-CATHODE VOLTAGE: ←		
HEATER NEGATIVE WITH RESPECT TO CATHODE		
DC AND PEAK	200	VOLTS
HEATER POSITIVE WITH RESPECT TO CATHODE		
DC	100	VOLTS
DC AND PEAK	200	VOLTS


TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS


CLASS A_1 AMPLIFIER


HEATER VOLTAGE	50	50	VOLTS
HEATER CURRENT	0.15	0.15	AMP.
PLATE VOLTAGE	110	200	VOLTS
GRID #2 VOLTAGE	110	125	VOLTS
GRID #1 VOLTAGE	-7.5	0	VOLTS
CATHODE BIAS RESISTOR	0	180	OHMS
PEAK AF GRID #1 VOLTAGE	7.5	8.5	VOLTS
PLATE RESISTANCE (APPROX.)	13 000	28 000	OHMS
TRANSCONDUCTANCE	8 000	8 000	μMHOS
ZERO-SIGNAL PLATE CURRENT	49	46	MA.
MAXIMUM-SIGNAL PLATE CURRENT	50	47	MA.
ZERO-SIGNAL GRID #2 CURRENT	4	2.2	MA.
MAXIMUM-SIGNAL GRID #2 CURRENT	10	8.5	MA.
LOAD RESISTANCE	2 000	4 000	OHMS
TOTAL HARMONIC DISTORTION (APPROX.)	10	10	PERCENT
POWER OUTPUT	2.1	3.8	WATTS


→ INDICATES A CHANGE.

PRINTED IN U.S.A.

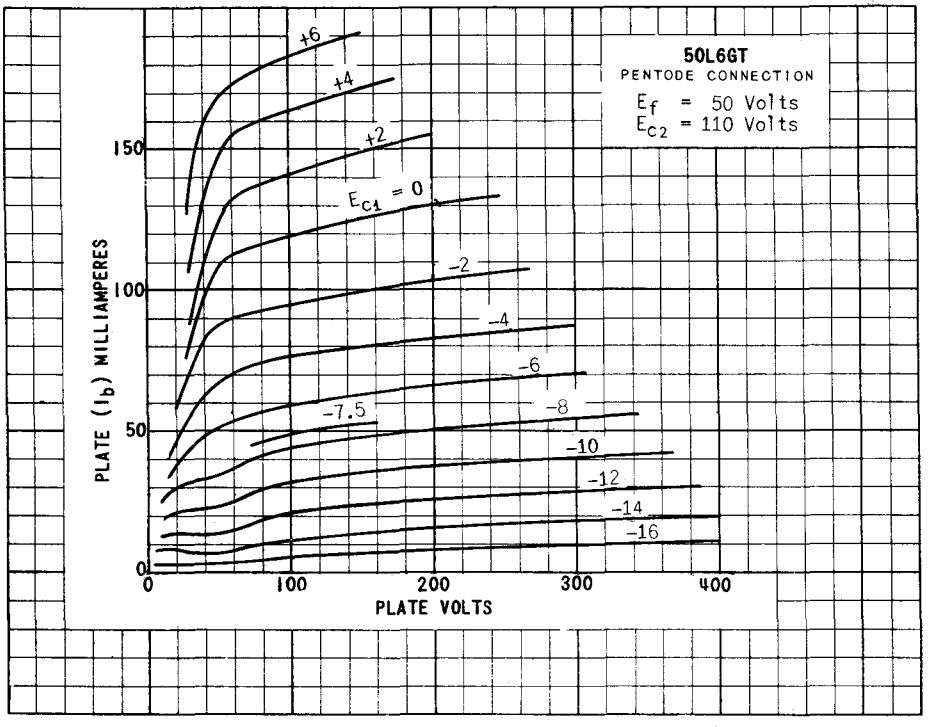
50L6GT
PENTODE CONNECTION
E_f = 50 Volts
E_{c2} = 110 Volts
+6
+4
+2
E_{c1} = 0
-2
-4
-6
-7.5
-8
-10
-12
-14
-16
PLATE (I_b) MILLIAMPERES
0
50
100
150
0
100
200
300
400
PLATE VOLTS

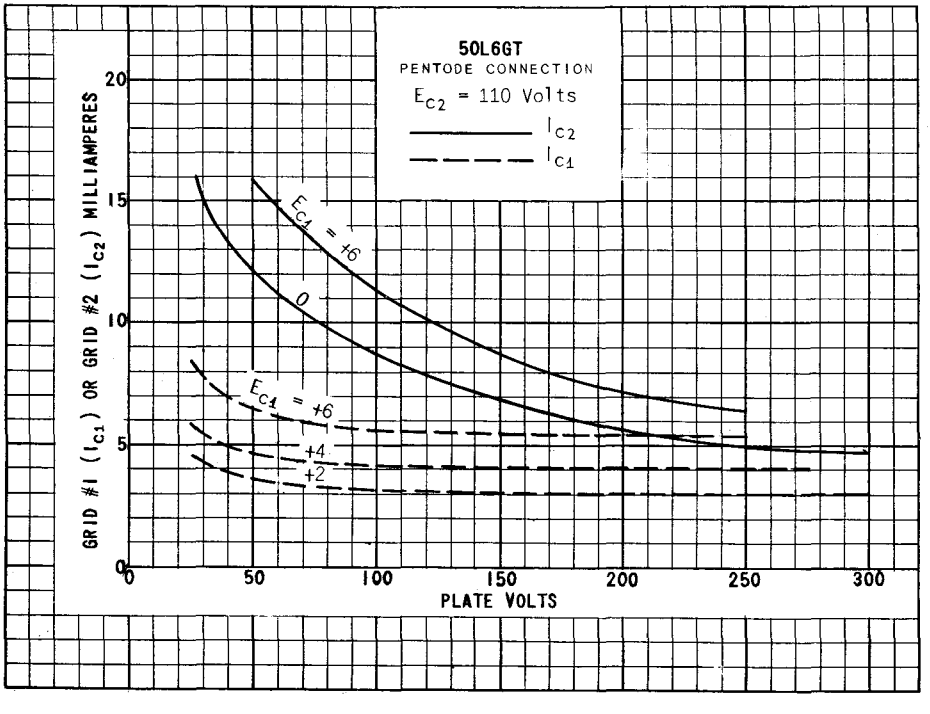
50L6GT
PENTODE CONNECTION
E_{c2} = 110 Volts
I_{c2}
I_{c1}
E_{c1} = +6
0
E_{c1} = +6
+4
+2
GRID #1 (I_{c1}) OR GRID #2 (I_{c2}) MILLIAMPERES
0
5
10
15
20
0
50
100
150
200
250
300
PLATE VOLTS

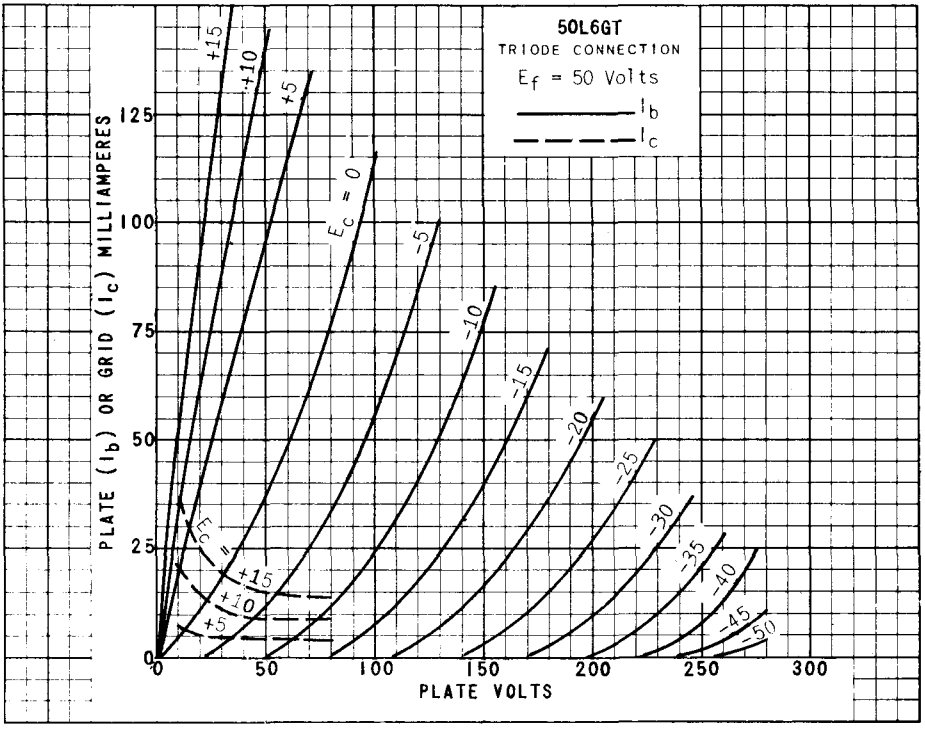

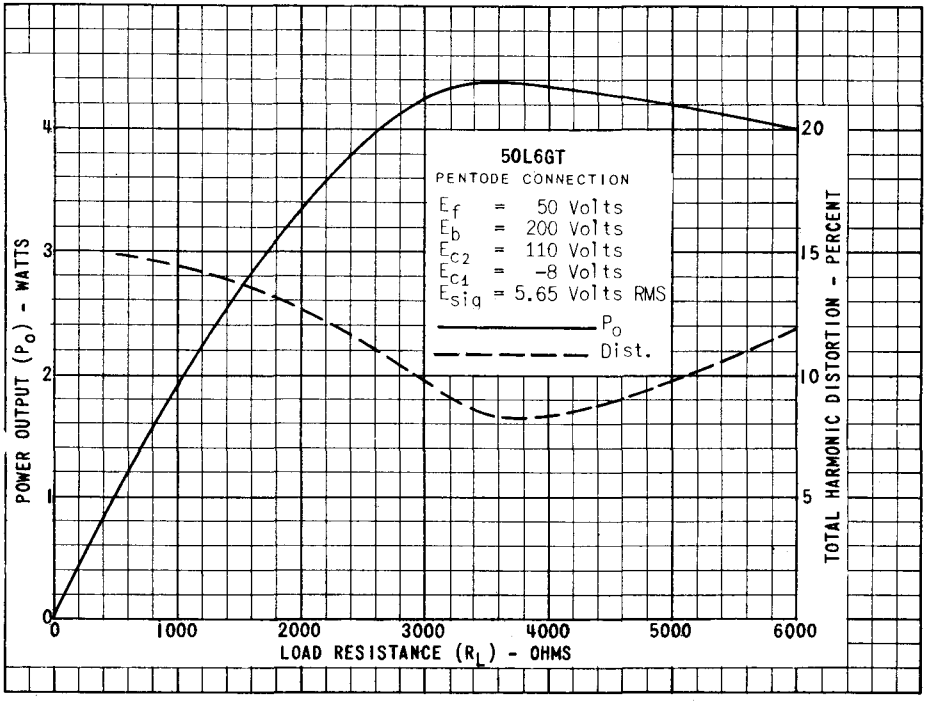

PRINTED IN U.S.A.

PLATE
2690
JUNE 1
1951

COPYRIGHT 1949 BY TUNG-SOL LAMP WORKS INC. ELECTRONIC TUBE DIVISION NEWARK, NEW JERSEY, U. S. A.