



50L6-GT

50L6-GT
★

BEAM POWER AMPLIFIER

Heater	Coated Unipotential Cathode	
Voltage	50	a-c or d-c volts
Current	0.15	amp.
Maximum Overall Length		3-5/16"
Maximum Seated Height		2-3/4"
Maximum Diameter		1-5/16"
Bulb		T-9
Base	Intermediate Shell Octal 7-Pin	
Pin 1—No Connection		Pin 5—Grid
Pin 2—Heater		Pin 7—Heater
Pin 3—Plate		Pin 8—Cathode
Pin 4—Screen		
Mounting Position		Any



BOTTOM VIEW (G-7AC)

AMPLIFIER

Plate Voltage	200 max.	volts
Screen Voltage	117 max.	volts
Plate Dissipation	10 max.	watts
Screen Dissipation	1.25 max.	watts

Typical Operation and Characteristics - Class A₁ Amplifier:

Plate	110	200	volts
Screen	110	110	volts
Grid *	-7.5	-8	volts
Peak A-F Grid Voltage	7.5	8	volts
Zero-Sig. Plate Cur.	49	50	ma.
Max.-Sig. Plate Cur.	50	55	ma.
Zero-Sig. Screen Cur.	4	2 approx.	ma.
Max.-Sig. Screen Cur.	11	7 approx.	ma.
Plate Resistance	13000	30000	approx. ohms
Transconductance	9000	9500	μmhos
Load Resistance	2000	3000	ohms
Total Harmonic Dist.	10	10	%
Power Output	2.1	4.3	watts

■ In circuits where the cathode is not directly connected to the heater, the potential difference between heater and cathode should be kept as low as possible.

* The type of input coupling should not introduce too much resistance in the grid circuit. Transformer- or impedance-coupling devices are recommended. When the grid circuit has a resistance not higher than 0.1 megohm, fixed bias may be used; for higher values, cathode bias is required. With cathode bias, the grid circuit may have a resistance not to exceed 0.5 megohm.

Curves under type 25L6-GT also apply to the 50L6-GT.

← Indicates a change.

Sept. 2, 1941

RCA RADOTRON DIVISION
RCA MANUFACTURING COMPANY, INC.

DATA


50L6-GT



50L6-GT

OPERATION CHARACTERISTICS


$E_f = 50$ VOLTS PLATE VOLTS = 200 SCREEN VOLTS = 110
CONTROL-GRID VOLTS = -8
SIGNAL VOLTS (RMS) = 5.65

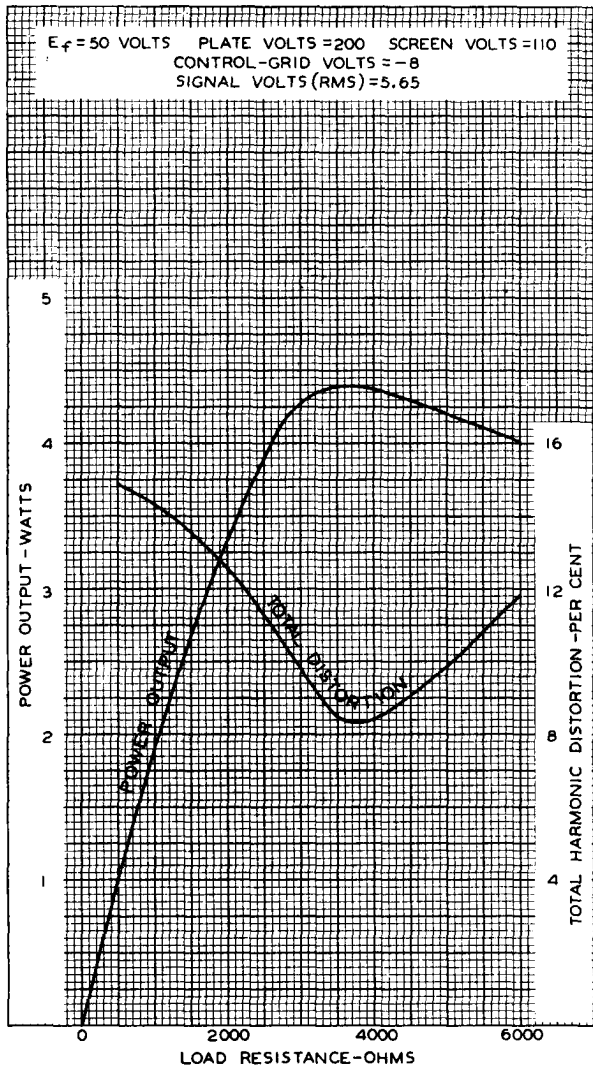



50L6-GT

50L6-GT AVERAGE PLATE CHARACTERISTICS PENTODE CONNECTION

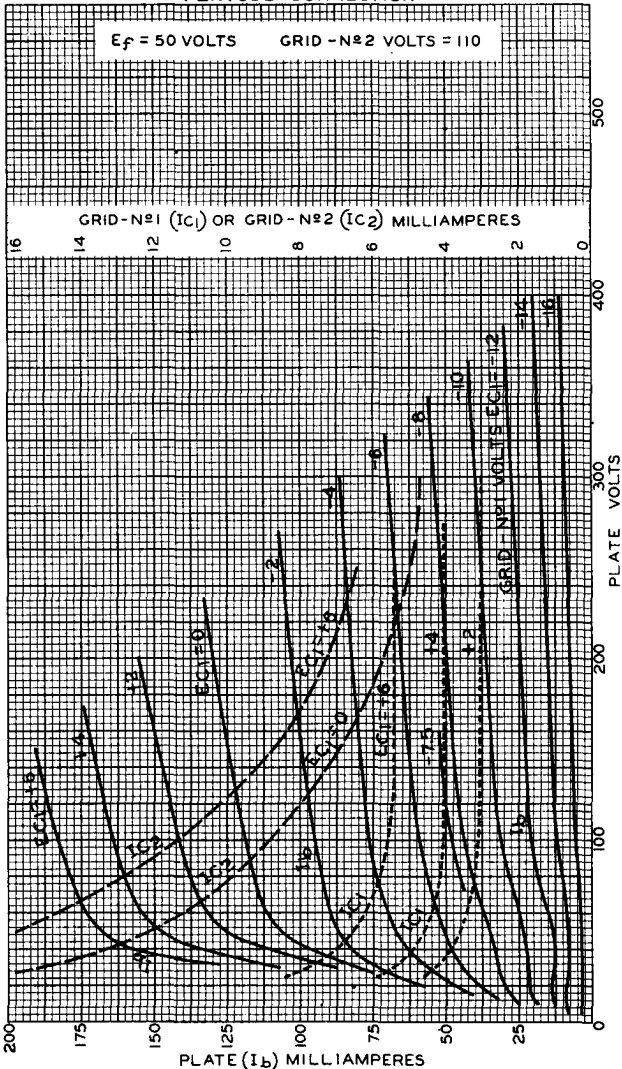

JAN. 27, 1950

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-6314R1

50L6-GT



50L6-GT

AVERAGE PLATE CHARACTERISTICS TRIODE CONNECTION

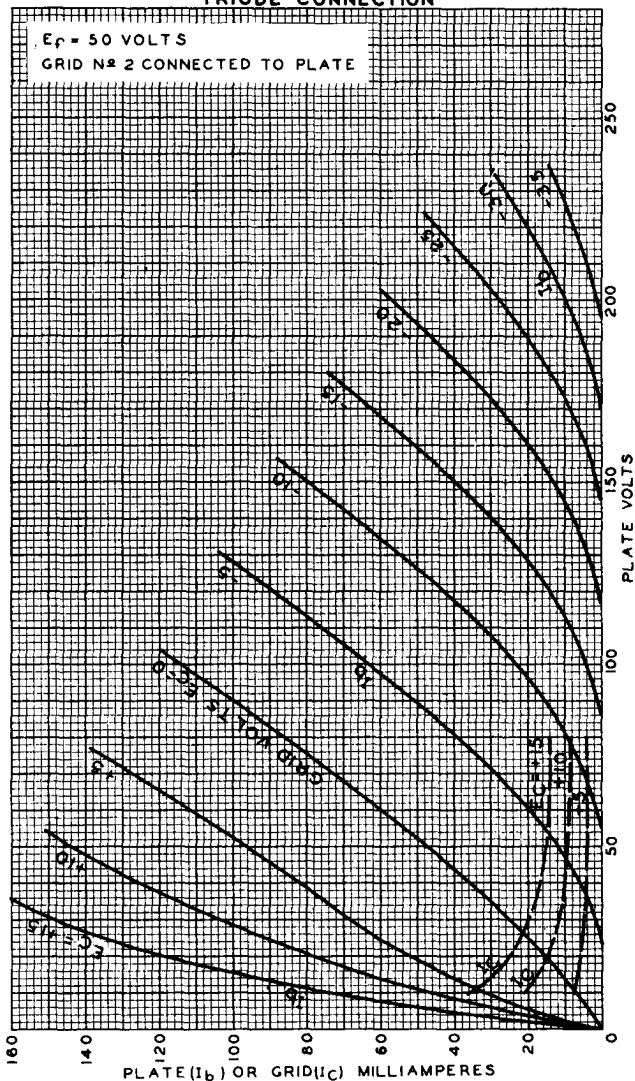

APRIL 6, 1948

TUBE DEPARTMENT

92CM-6318R1

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY