



559

559

LIGHTHOUSE DIODEGENERAL DATA**Electrical:**

Heater for Unipotential Cathode:

Voltage $6.3 \pm 5\%$ ac or dc volts

Current 0.75 amp.

Direct Interelectrode Capacitance (Approx.):

Plate to Cathode 2.70 μf **Mechanical:**

Operating Position Any

Mounting Tube should be supported by its metal shell
and not by its base or other terminals

Dimensions and Terminals See Outline Drawing

Base Small H-Wafer Octal 6-Pin

BOTTOM VIEW

Pin 1 - Internal Con.

Do Not Use


Pin 2 - Heater

Pin 3 - Cathode

Pin 5 - Cathode

Pin 7 - Heater

Pin 8 - Cathode



Shell	{	Cathode
(S)		RF Terminal
Disc	{	Plate
		Terminal

HALF-WAVE RECTIFIER**Maximum Ratings, Design-Center Values:**

PEAK INVERSE PLATE VOLTAGE 200 max. volts

PEAK PLATE CURRENT 180 max. ma.

AVERAGE PLATE CURRENT 27 max. ma.

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode. . . 90 max. volts

Heater positive with respect to cathode. . . 90 max. volts

PLATE-SEAL TEMPERATURE* 150 max. °C


* Under extremely high ambient temperature, the plate-seal temperature must never exceed 200°C.

559



559

LIGHTHOUSE DIODE

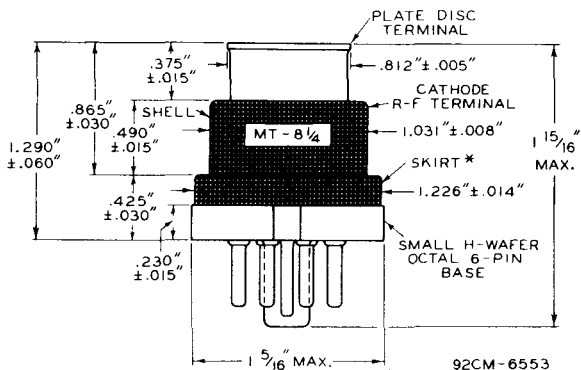


MAXIMUM ECCENTRICITY OF ϕ (AXIS) OF THE FOLLOWING ITEMS WITH RESPECT TO ϕ OF SHELL AS REFERENCE IS:

PLATE DISC TERMINAL: 0.020"

SKIRT: 0.035"

*NOT TO BE USED FOR RF CONTACT IN NEW EQUIPMENT DESIGNS.

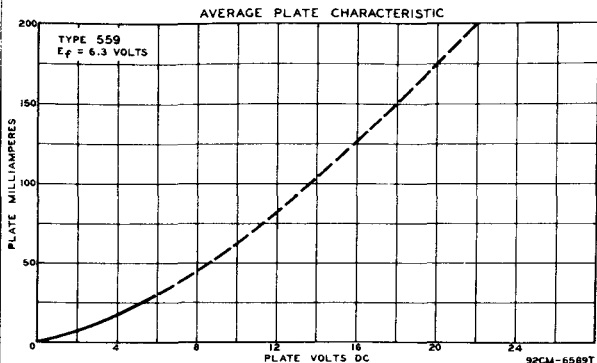

Nov. 15, 1945


RCA VICTOR DIVISION

TENTATIVE DATA

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY



559

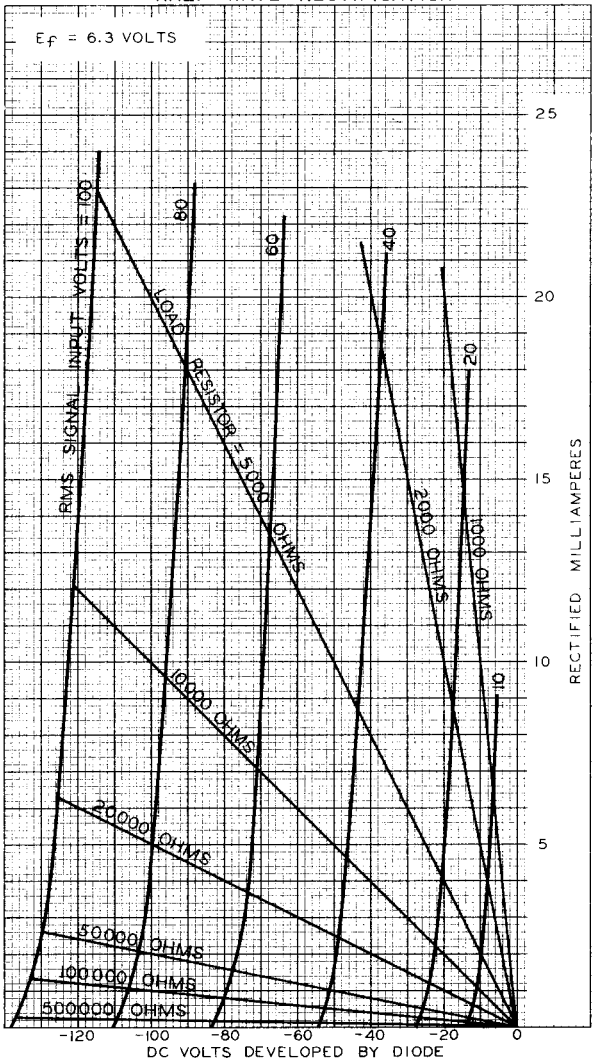AVERAGE CHARACTERISTICS
HALF-WAVE RECTIFICATION

JULY 4, 1945

RCA VICTOR DIVISION
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-6588