


TUNG-SOL

THIS DATA SHEET ALSO APPLIES TO TWO OTHER
MILITARY VERSIONS, DESIGNATED 5703WA AND 5703WB


TRIODE SUBMINIATURE TYPE

FOR UHF OSCILLATOR
APPLICATIONS

ANY MOUNTING POSITION

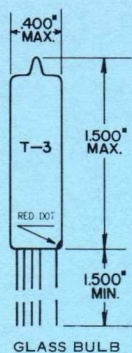

GLASS BULB
DOT IS ADJACENT TO LEAD 1..



BOTTOM VIEW

0.016" TINNED
FLEXIBLE LEADS
0.048" CENTER-TO-CENTER
EXCEPT LEADS 1-3 = 0.096"
CENTER-TO-CENTER
IN-LINE

THE 5703 IS A HEATER-CATHODE TYPE MEDIUM-MU SUBMINIATURE TRIODE CAPABLE OF OPERATION AS AN OSCILLATOR, CLASS C AMPLIFIER, OR FREQUENCY MULTIPLIER IN THE UHF REGION. THE FLEXIBLE TERMINAL LEADS MAY BE SOLDERED OR WELDED TO CIRCUIT COMPONENTS WITHOUT THE USE OF SOCKETS. STANDARD SUBMINIATURE SOCKETS MAY BE USED BY CUTTING THE LEADS TO A SUITABLE LENGTH.

DIRECT INTERELECTRODE CAPACITANCES

WITHOUT SHIELD

GRID TO PLATE	1.2	pf
INPUT	2.6	pf
OUTPUT	0.7	pf

HEATER CHARACTERISTICS AND RATINGS

ABSOLUTE MAXIMUM VALUES - SEE EIA STANDARD RS-239

AVERAGE CHARACTERISTICS	6.3	VOLTS	200	MA.
HEATER SUPPLY LIMITS:				
VOLTAGE OPERATION			6.3 ± 0.6	VOLTS
MAXIMUM HEATER CATHODE VOLTAGE			±100	VOLTS

MAXIMUM RATINGS

ABSOLUTE MAXIMUM VALUES - SEE EIA STANDARD RS-239

PLATE VOLTAGE	275	VOLTS
PLATE DISSIPATION	3.3	WATTS
PLATE CURRENT	22	MA.
GRID CURRENT	5.5	MA.
ALTITUDE	10,000	FEET
ENVELOPE TEMPERATURE	220	°C

TUNG-SOL


CONTINUED FROM PRECEDING PAGE



TYPICAL OPERATING CHARACTERISTICS

DC PLATE VOLTAGE	120	VOLTS
DC GRID VOLTAGE	0	VOLTS
CATHODE BIAS RESISTANCE	220	OHMS
PLATE CURRENT	9.6	MA.
TRANSCONDUCTANCE	5000	μ MHOS
AMPLIFICATION FACTOR	25.5	

SPECIAL TESTS AND RATINGS

OPERATION PEAK OUTPUT (AC MIN.)	45	VOLTS
Ebb = 105 Vdc; Ef = 5.2 Vac; Eg = 19.5 Vac; RL = 750; Rg = 2700; CIRCUIT DRAWING - SEE FIGURE 1		
POWER OSCILLATION (MIN.)	180	MW
Ebb = 91 Vdc; Ef = 5.6 Vac; Tg = 2400; F = 400 Mc TEST PER 185 JAN DRAWING OR EQUIVALENT		

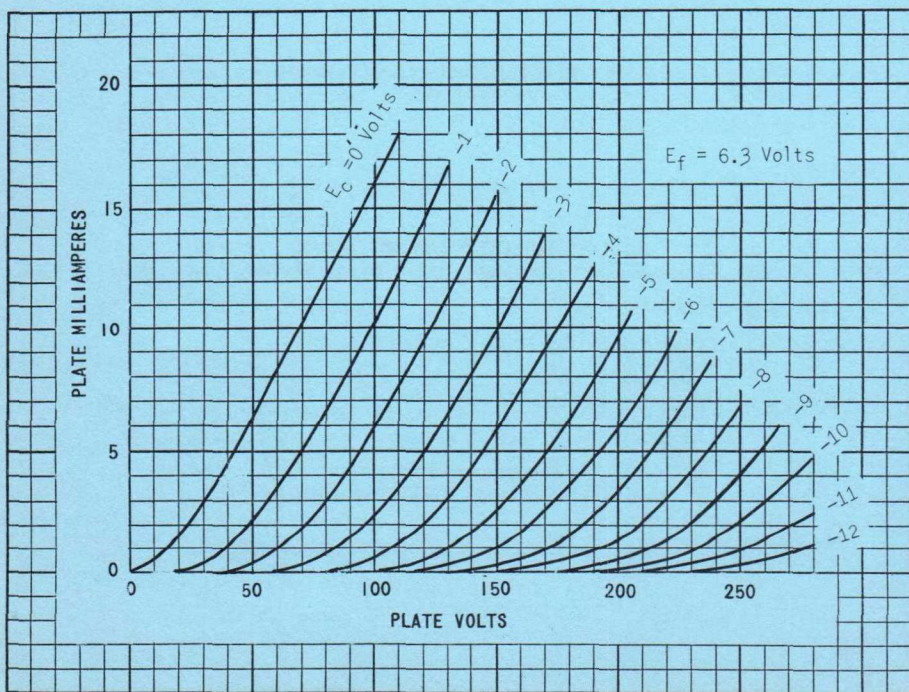

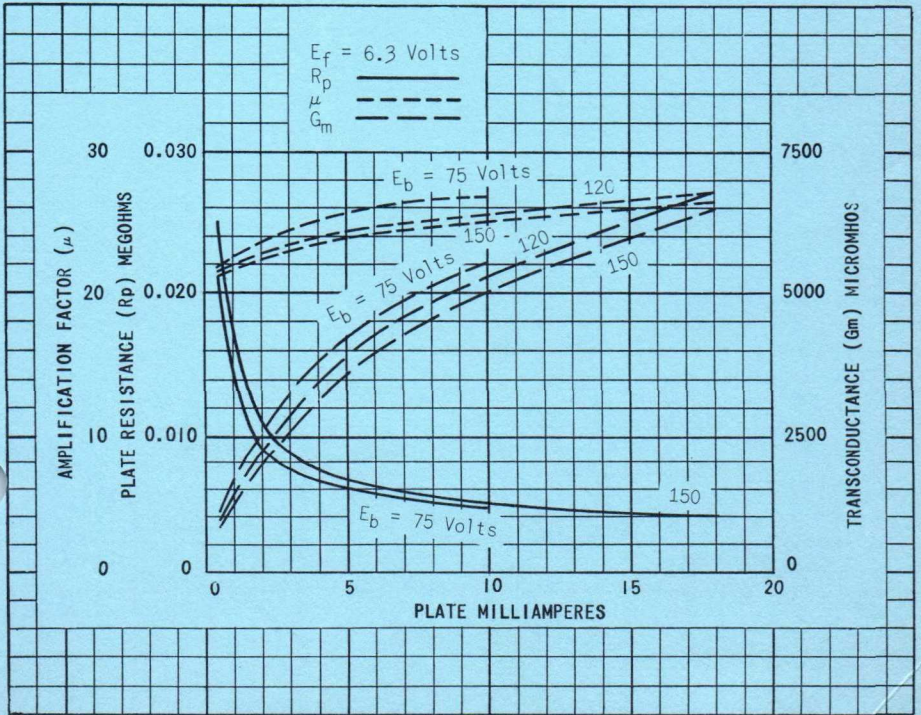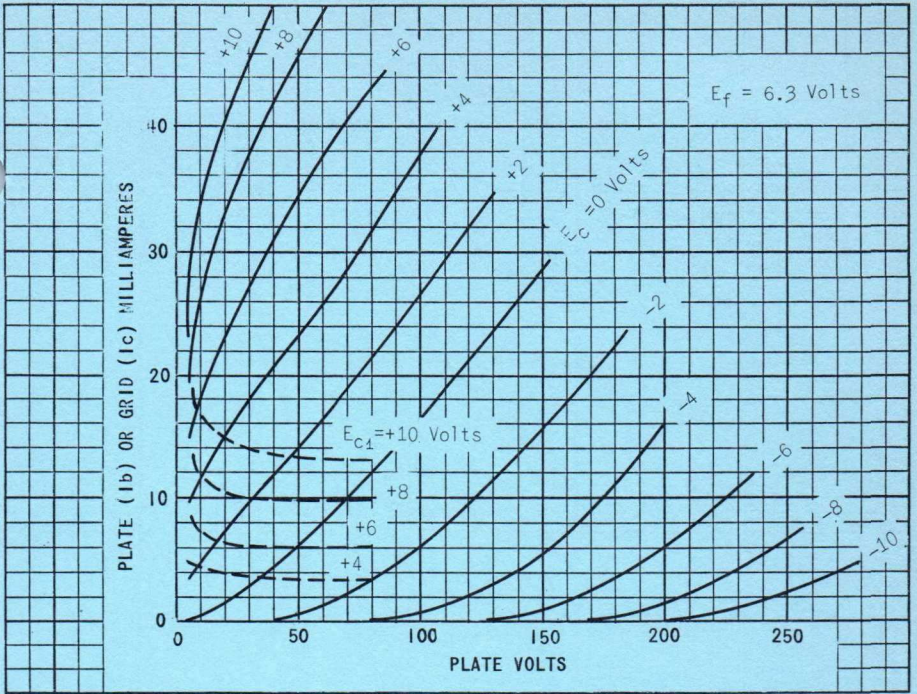

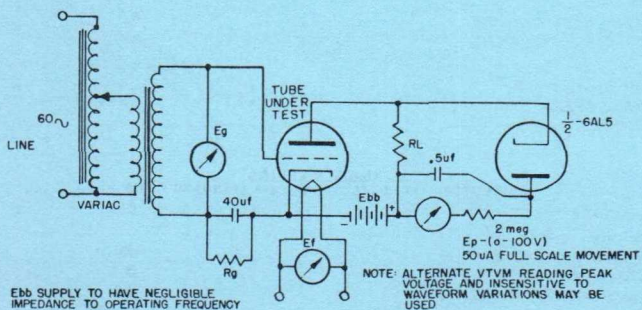
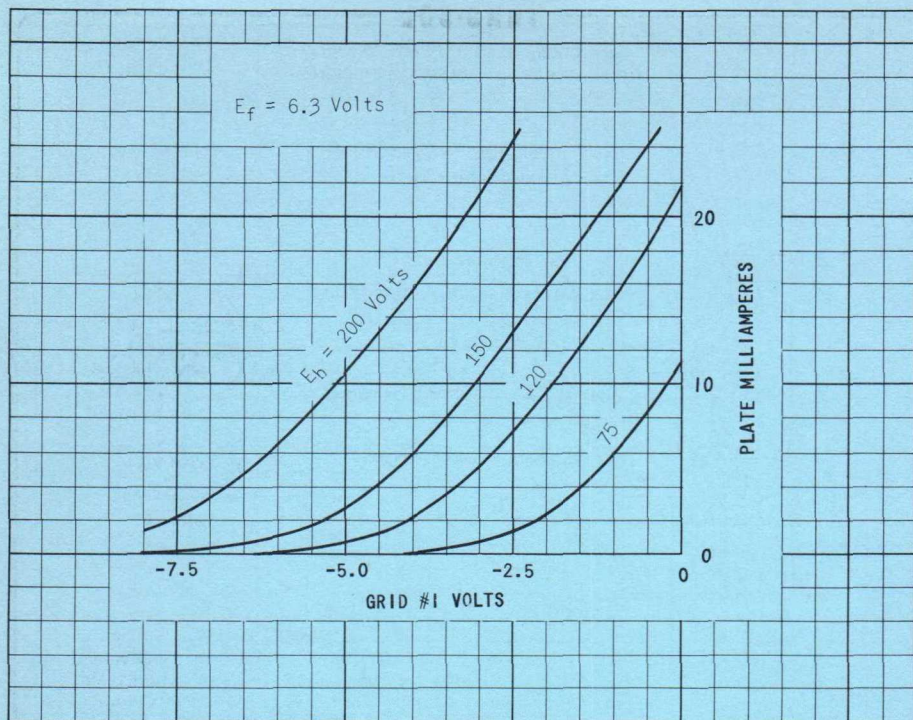


FIG. 1