SPECIAL QUALITY U.H.F. TRIODE

5718

Special quality subminiature medium-μ triode for use as an oscillator at frequencies up to 500Mc/s in equipment where high ambient temperatures, mechanical vibration and shocks are unavoidable and where statistically controlled major electrical characteristics are required.

This data should be read in conjunction with GENERAL NOTES—SPECIAL QUALITY VALVES which precede this section of the handbook, and the index numbers are used to indicate where reference should be made to a specific note.

HEATER

V_h[1]	6.3	V
I_h	150	mA

MOUNTING POSITION

Any

Note—Direct soldered connections to the leads of this valve must be at least 5mm from the seal and any bending of the valve leads must be at least 1.5mm from the seal.

CAPACITANCES[2] (measured without external shield)

$C_{a\ g}$	1.3	pF
C_{in}	2.3	pF
C_{out}	800	mpF

CHARACTERISTICS[3]

V_a	100	V
V_g	−1.3	V
I_a	8.5	mA
g_m	5.8	mA/V
r_a	4.7	kΩ
μ	27	
R_k	0	Ω
$V_g(I_a < 100\mu A)$	−7.0	V

LIMITING VALUES[4] (absolute ratings)

V_h max.	6.6	V
V_h min.	6.0	V
$V_{a(b)}$ max.	330	V
V_a max.	165	V
p_a max.	900	mW
$+V_g$ max.	0	V ←
$-V_g$ max.	55	V
I_a max.	22	mA
I_g max.	5.5	mA
R_{g-k} max.	1.2	MΩ
V_{h-k} max.	200	V
Maximum acceleration (continuous operation)	2.5	g
Maximum shock (short duration)	500	g
T_{bulb} max.	220	°C

5718

SPECIAL QUALITY U.H.F. TRIODE

TEST CONDITIONS (unless otherwise specified)

V_h (V)	V_{a-e} (V)	V_{g-e} (V)	R_k (Ω)	C_k (μF)	V_{h-k} (V)
6.3	100	0	150	1000	0

TESTS	A.Q.L.[5] (%)	Individuals[6] Bogey[9]	Individuals[6] Min.	Individuals[6] Max.	Lot average[7] Min.	Lot average[7] Max.	Lot standard deviation[8] Max.	
GROUP A								
Heater current	0.65	150	140	160	—	—	—	mA
	—	—	—	—	144	156	4.2	mA
Heater-to-cathode leakage current $V_{h-k} = \pm 100V$	0.65	—	—	5.0	—	—	—	μA
Reverse grid current $R_g = 1.0M\Omega$ $V_{a-e} = 150V$, $R_k = 380\Omega$	0.65	—	0	0.4	—	—	—	μA
Anode current	0.65	8.5	6.0	11	—	—	—	mA
	—	—	—	—	7.5	9.5	1.1	mA
Anode current $V_g = -7.0V$, $R_k = 0\Omega$	0.65	—	—	100	—	—	—	μA
Mutual conductance	0.65	5.8	4.8	6.8	—	—	—	mA/V
	—	—	—	—	5.4	6.2	0.4	mA/V
Sub-group quality level[10]	1.0	—	—	—	—	—	—	
Inoperatives[16]	0.4	—	—	—	—	—	—	

GROUP B

Insulation								
a-rest, measured at –300V	2.5	—	100	—	—	—	—	MΩ
g-rest, measured at –100V	2.5	—	100	—	—	—	—	MΩ
Anode current $V_g = -4V$, $R_k = 0\Omega$	2.5	—	20	—	—	—	—	μA
Change in mutual conductance $V_h = 5.7V$	2.5	—	—	10	—	—	—	%
Reverse grid current $V_h = 7.5V$, $V_{g-e} = -7.0V$ $R_g = 1.0M\Omega$. Measured after 5 minutes pre-heat under standard test conditions, except $V_h = 7.5V$, $R_g = 1.0M\Omega$	2.5	—	0	0.4	—	—	—	μA
†A.F. noise at anode, $R_g = 100k\Omega$, $R_a = 10k\Omega$ $V_g = -4V$, $R_k = 0\Omega$	2.5	—	—	50	—	—	—	mV
Amplification factor	6.5	—	23	31	—	—	—	
Power oscillation f = 500Mc/s, $V_a = 150V$, R_g adjusted to give $I_a = 20mA$	6.5	—	600	—	—	—	—	mW
Capacitances[2] (unshielded). No applied voltages								
C_{in}	—	—	1.6	2.8	—	—	—	pF
C_{out}	—	—	500	900	—	—	—	mpF
C_{a-g}	—	—	1.1	1.8	—	—	—	pF
Low pressure voltage breakdown Pressure = 55 ± 5mmHg Voltage = $300V_{r.m.s.}$ No other applied voltages	6.5	—	—	—	—	—	—	
Microphonic noise at the anode at 50c/s, 15g min peak acceleration, $R_a = 10k\Omega$	2.5	—	—	25	—	—	—	mV (r.m.s.)

†The valve is tapped with a specified hammer and the output observed on a meter of specified dynamic response.

TESTS	A.Q.L.[5] (%)	Individuals[6] Bogey[9]	Individuals[6] Min.	Individuals[6] Max.	Lot average[7] Min.	Lot average[7] Max.	Lot standard deviation[8] Max.	
GROUP C								
Lead fragility test[13B] 4 arcs	2.5	—	—	—	—	—	—	
Fatigue[14]								
V_h = 6.3V. No other voltages applied. 2.5g min. peak acceleration, fixed frequency f = 25c/s min. 60c/s max. for 32 hours in each of 3 mutually perpendicular planes								
Post fatigue tests								
Heater-to-cathode leakage current V_{h-k} = ±100V.	6.5	—	—	15	—	—	—	μA
Change in mutual conductance	6.5	—	—	15	—	—	—	%
Microphonic noise as in group B	6.5	—	—	100	—	—	—	mV
Shock[15]								
V_{h-k} = 100V (cathode negative), R_g = 100kΩ, 500g								
Post shock tests								
Heater-to-cathode leakage current V_{h-k} = ±100V	20	—	—	15	—	—	—	μA
Change in mutual conductance	20	—	—	15	—	—	—	%
Microphonic noise as in group B	20	—	—	100	—	—	—	mV
Glass strain test[11B]. No applied voltages	6.5	—	—	—	—	—	—	

GROUP D

Heater cycling life test								
V_h = 7.0V. 1 minute on, 4 minutes off V_{h-k} = 140$V_{r.m.s.}$ (continuous). No other applied voltages	2.5	—	—	—	—	—	—	
Stability life test[14]								
Running conditions R_g = 1.0MΩ, V_{h-k} = 200V (cathode negative), $T_{ambient}$ = Room temperature								
Stability life test end points								
Change in mutual conductance after 1 hour	1.0	—	—	10	—	—	—	%
Survival rate life test[14]								
Running conditions R_g = 1.0MΩ V_{h-k} = 200V (cathode negative), $T_{ambient}$ = Room temperature								
Survival rate life test end points (100 hours)								
Inoperatives[16]	0.65	—	—	—	—	—	—	
Mutual conductance	1.0	—	4.5	—	—	—	—	mA/V
					A.Q.L.[5] (%)	*Min.*	*Max.*	
Intermittent life test								
Running conditions, Rg = 1.0MΩ, V_{h-k} = 200V (cathode negative), T_{bulb} min. = 220°C								
Intermittent life test end points (500 hours)								
Inoperatives[16]					2.5	—	—	
Heater current					4.0	138	164	mA
Heater-to-cathode leakage current V_{h-k} = ±100V					4.0	—	10	μA
Reverse grid current R_g = 1.0MΩ					2.5	0	0.6	μA
Change in mutual conductance (individuals)					2.5	—	20	%
Change in mutual conductance V_h = 5.7V					4.0	—	15	%
Insulation as in group B					4.0	50	—	MΩ
Average change in mutual conductance					—	—	15	%
Sub-group quality level[10]					10	—	—	

5718

SPECIAL QUALITY U.H.F. TRIODE

5604





B8D/F Base

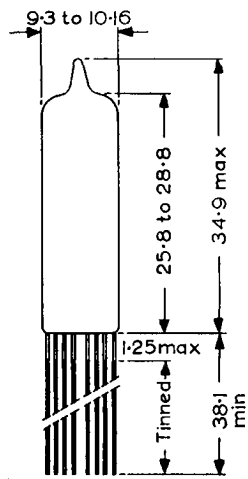

All dimensions in mm

The base and bulb dimensions of this valve are in accordance with BS.448, Section B8D/F.

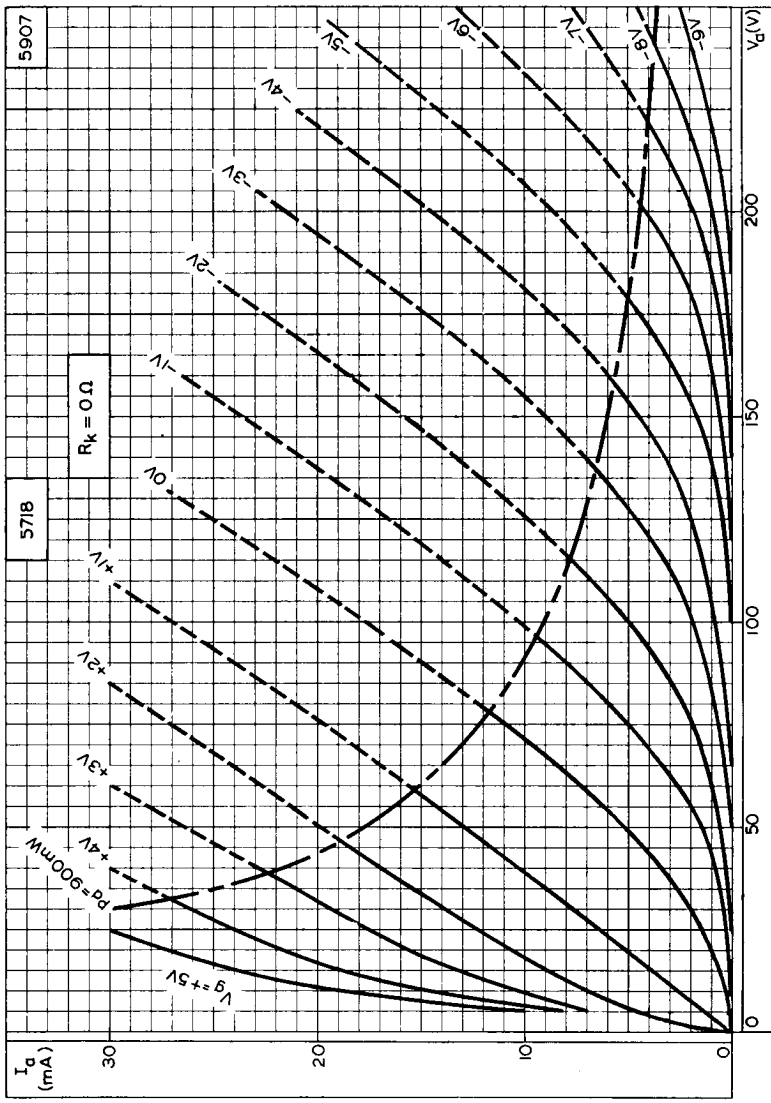

ANODE CURRENT PLOTTED AGAINST ANODE VOLTAGE WITH GRID VOLTAGE AS PARAMETER

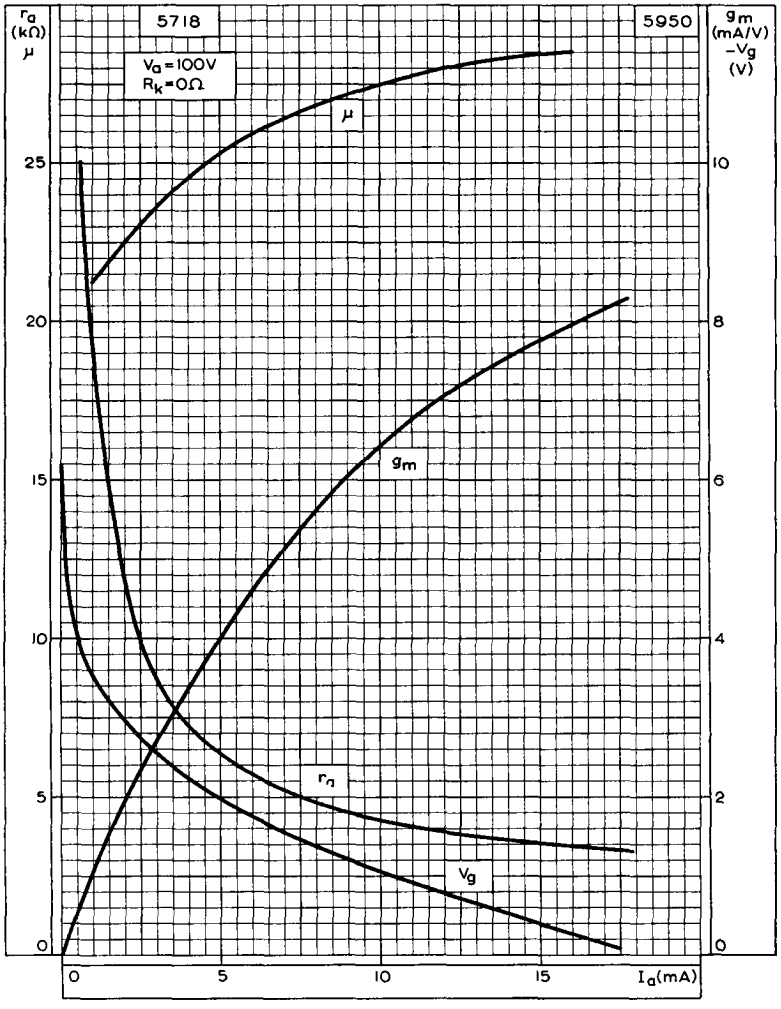

ANODE IMPEDANCE, MUTUAL CONDUCTANCE, GRID VOLTAGE AND AMPLIFICATION FACTOR PLOTTED AGAINST ANODE CURRENT