



5881

A. F. BEAM PENTODE



Base: OCTAL

$$U_f = 6,3 \text{ V}$$

$$I_f = 0,9 \text{ A}$$

Typical Characteristics: Class A1:

Single tube Push-Pull

$$U_a = 250 \quad 270 \quad \text{V}$$

$$U_{g2} = 250 \quad 270 \quad \text{V}$$

$$U_{g1} = -14 \quad -17,5 \quad \text{V}$$

$$I_a = 63 \quad 134 \quad \text{mA}$$

$$I_{g2} = 4,3 \quad 11 \quad \text{mA}$$

$$R_a = 2,5 \quad - \quad \text{k}\Omega$$

$$R_{a-a} = - \quad 5 \quad \text{k}\Omega$$

$$N = 6,7 \quad 17,5 \quad \text{W}$$

Limiting Values:

	Triode	Pentode
U_a	450	500
U_{g2}	450	450
W_a	26	23

Grid No 1 Circuit Resistance

Fixed Bias	0,1	M Ω
Self Bias	0,5	M Ω



TRANSFER CHARACTERISTICS

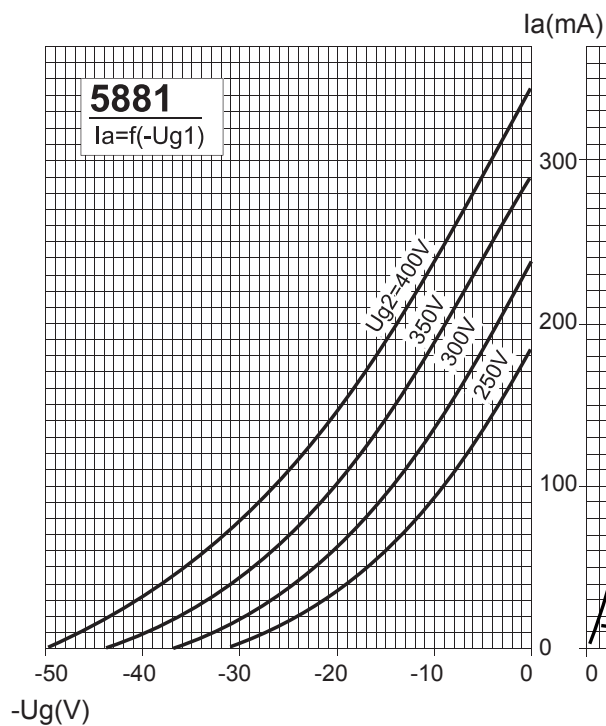


PLATE CHARACTERISTICS

