

RAYTHEON

TECHNICAL
INFORMATION
SERVICE

Technical Information

CK5885

SUBMINIATURE
DOUBLE TETRODE
ELECTROMETER
TUBE

Raytheon type CK5885 is a double tetrode electrometer tube designed for use in balanced circuits commonly employed in portable and wearable radiation instruments. Although rated as a triode, the use of a tetrode structure permits a greater degree of circuit flexibility.

Standard subminiature sockets may be used by cutting the leads to a 0.200" length, or the flexible terminal leads may be soldered or welded directly to circuit components.

ELECTRICAL DATA

FILAMENT CHARACTERISTICS

Filament Voltage	1.25	Volts
Filament Current	0.020	Amps

RATINGS - ABSOLUTE MAXIMUM VALUES

Filament Voltage	1.0 to 1.5	Volts
Plate Voltage	22.5	Volts
Grid #2 Voltage	22.5	Volts
Cathode Current, Each Unit	300	uAdc

AVERAGE CHARACTERISTICS Δ

Plate Voltage (tied to screen)	13.5	Volts
Grid Voltage	3	Volts
Plate Current, Each Unit	185	uAdc
Amplification Factor, Either Unit	2.4	---
Transconductance, Each Unit	160	umhos
Grid Current (nominal)	1×10^{-12}	amps

Δ Triode Connection - screen grid tied to plate


TENTATIVE DATA

Page 1 of 1

MECHANICAL DATA

ENVELOPE..T3 glass
OUTLINE..JEDEC 3-2
(MIL 8-2)
BASE..E810, Sub-
miniature button
LEADS...0.017" tinned
Flexible Leads
MOUNTING POSITION..
ANY

OUTLINE DETAILS

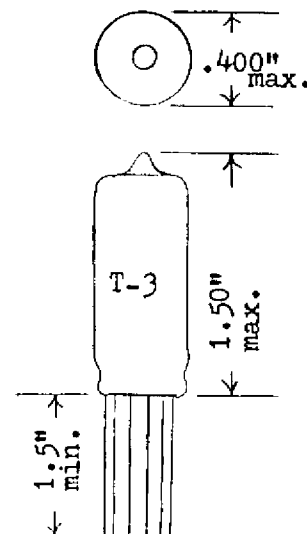

8MB

TERMINAL CONNECTIONS

Lead 1 Control Grid,
Unit 1
Lead 2 Screen Grid,
Unit 1
Lead 3 Plate, Unit 1
Lead 4 Filament,
Negative
Lead 5 Screen Grid,
Unit 2
Lead 6 Control Grid,
Unit 2
Lead 7 Plate, Unit 2
Lead 8 Filament,
Positive