

—Standard Valves—

5A/102-A

VALVE TYPE 5A/102-A

(previously coded VLS.452).

OUTPUT PENTODE.

SPECIFICATION.

Cathode.

Indirectly heated oxide coated.
Constant current type.

Base.

American medium 6-pin—Control grid connected to top cap type B.


Dimensions.

Max. overall length $5\frac{1}{8}"$ (13 cms.)
Max. diameter $1\frac{13}{16}"$ (4.6 cms.)
Net weight 0.11 lbs. (50 gms.)

Constants.

Nominal heater voltage 7.5 volts
Heater current 0.85 amps.
*Amplification factor 110
*Impedance 43,000 ohms
*Mutual conductance 2.5 mA. per volt
Grid-anode capacity 0.5 $\mu\mu\text{F}$.
Input capacity 6.8 $\mu\mu\text{F}$.
Output capacity 9 $\mu\mu\text{F}$.

* at $V_p = 180$ $V_{g_2} = 150$, $V_{g_1} = -18$ volts.

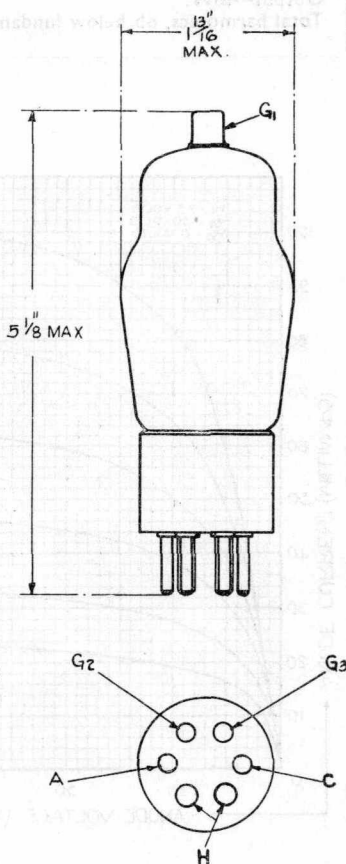

LIMITING CONDITIONS FOR SAFE OPERATION.

Maximum direct anode voltage	180 volts
Maximum direct anode current	50 mA.
Maximum direct screen voltage	150 volts
Maximum direct screen current	10 mA.
Maximum control grid resistance (using auto-bias).	500,000 ohms

Tentative data

W.5A/102-A.1
March, 1939

—Standard Valves—

TYPICAL OPERATING CONDITIONS.

Anode voltage
Control grid voltage
Screen voltage
Suppressor voltage
Load resistance
Output—mW.
Total harmonics, db below fundamental

180 volts
—18 volts
150 volts
0 volts
4,000 ohms
50 100 250 500 750 1,000
34 31 28 26 25 24

