



Output Pentode

5A/102A**5A/102D**

5A/102A and D

(5A/102A is for replacement purposes only)

CATHODE.

Indirectly-heated Oxide-coated

Current	0.85	A
---------	------	---

Nominal voltage	7.5	V
-----------------	-----	---

RATING.

Mutual conductance	$\left\{ \begin{array}{l} \text{Measured at } V_a \text{ 180V} \\ V_{g_2} \text{ 150V } V_{g_1} \text{ —18V} \end{array} \right\}$	2.5	ma/V
--------------------	--	-----	------

INTER-ELECTRODE CAPACITIES.

Grid to anode	0.5	pF
---------------	-----	----

Input	6.8	pF
-------	-----	----

Output	9	pF
--------	---	----

DIMENSIONS.

	5A/102A	5A/102D
Maximum overall length	134 mm.	134 mm.

Maximum bulb diameter	46 mm.	46 mm.
-----------------------	--------	--------

Net weight	50 g.	55 g.
------------	-------	-------

Base	Am 6 pin.	Int. Octal
------	-----------	------------

MAXIMUM RATINGS.

Maximum direct anode voltage	180	V
------------------------------	-----	---

Maximum direct anode current	50	mA
------------------------------	----	----

Maximum direct screen voltage	150	V
-------------------------------	-----	---

Maximum direct screen current	10	mA
-------------------------------	----	----

Maximum control grid resistance (using auto-bias)	500	k Ω
--	-----	------------

5A/102A
5A/102D

Output Pentode



5A/102A and D

(5A/102A is for replacement purposes only)

TYPICAL OPERATING CONDITIONS.

Anode voltage	180 volts
Control grid voltage	—18 volts
Screen voltage	150 volts
Suppressor voltage	0 volts
Load resistance	4,000 ohms
Output mW	50 100 250 500 750 1,000
Total harmonics, db below fundamental	34 31 28 26 25 24




Output Pentode

5A/102A
5A/102D

5A/102A and D

(5A/102A is for replacement purposes only)

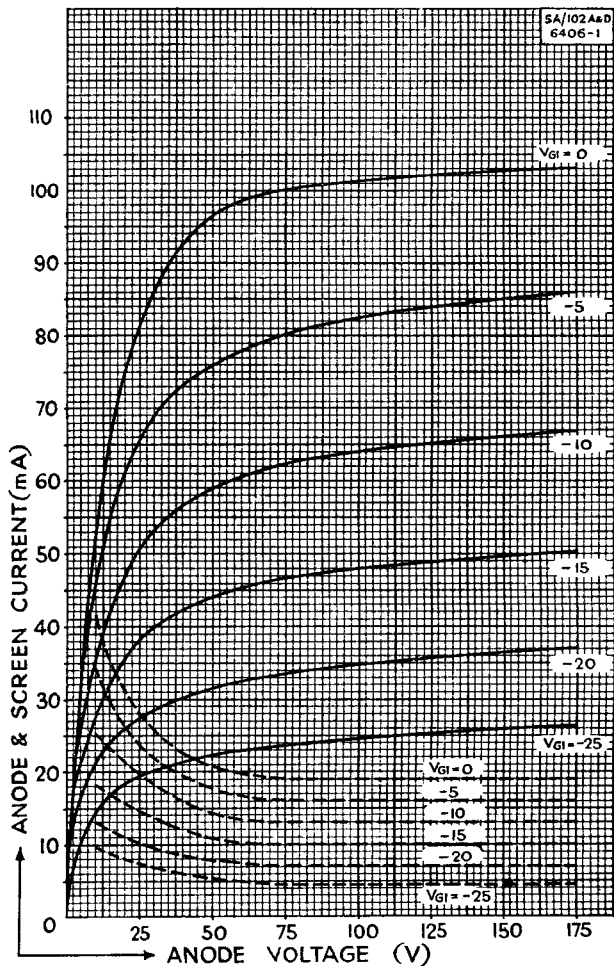


5A/102A
5A/102D

Output Pentode



5A/102A and D

(5A/102A is for replacement purposes only)

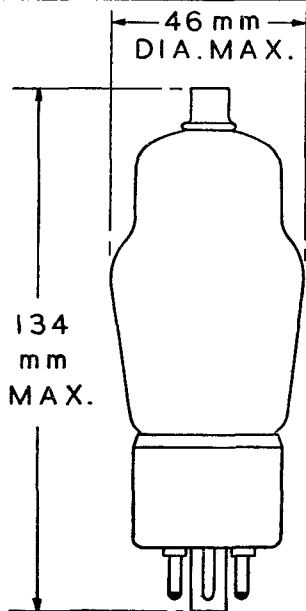


5A/102A BASING


- 1 HEATER
- 2 ANODE
- 3 GRID 2
- 4 GRID 3
- 5 CATHODE
- 6 HEATER

5A/102D BASING

- 1 BLANK
- 2 HEATER
- 3 ANODE
- 4 GRID 2
- 5 GRID 3
- 7 HEATER
- 8 CATHODE



5A/102D



5A/102A