



5ADPI

OSCILLOGRAPH TUBE

POST-DEFLECTION ACCELERATOR

ELECTROSTATIC FOCUS

ELECTROSTATIC DEFLECTION

DATA

General:

Heater, for Unipotential Cathode:

Voltage 6.3 ac or dc volts
 Current $0.6 \pm 10\%$ amp

Direct Interelectrode Capacitances:

Grid No.1 to all other electrodes. 4.2 to 7.9 μf
 Cathode to all other electrodes. 3.1 to 5.8 μf
 Deflecting electrode DJ₁ to
 deflecting electrode DJ₂ 1.7 to 3.1 μf
 Deflecting electrode DJ₃ to
 deflecting electrode DJ₄ 0.7 to 1.3 μf
 DJ₁ to all other electrodes. 4.4 to 9.2 μf
 DJ₂ to all other electrodes. 4.4 to 9.2 μf
 DJ₃ to all other electrodes. 2.8 to 5.3 μf
 DJ₄ to all other electrodes. 2.8 to 6.3 μf

Faceplate, Flat. Clear Glass

Phosphor (For Curves, see front of this Section) P1

Fluorescence Green

Phosphorescence. Green

Persistence. Medium

Focusing Method. Electrostatic

Deflection Method. Electrostatic

Deflecting-electrode

arrangement. See Dimensional Outline

Overall Length $16\text{-}3/4" \pm 3/16"$ Greatest Diameter of Bulb. $5\text{-}1/4" \pm 3/32"$ Minimum Useful Screen Diameter $4\text{-}1/2"$

Weight (Approx.) 2-1/2 lbs

Mounting Position. Any

Cap. Recessed Small Ball (JETEC No.J1-22)

Bulb J42

Base Medium-Shell Diheptal 12-Pin (JETEC No.B12-37)

Basing Designation for BOTTOM VIEW 14J

Pin 1-Heater

Pin 2-Cathode

Pin 3-Grid No.1

Pin 4-No Connec-

tion-Do

Not Use

Pin 5-Grid No.3

Pin 7-Deflecting

Electrode

DJ₃

Pin 8-Deflecting

Electrode

DJ₄

Pin 9-Ultor

(Grid No.2,

Grid No.4)

Pin 10-Deflecting

Electrode

DJ₂

Pin 11-Deflecting

Electrode

DJ₁

Pin 12-No Connec-


tion

Pin 14-Heater

Cap-Post-Ultor

(Grid No.5,

Collector)





5ADPI

OSCILLOGRAPH TUBE

Maximum Ratings, Design-Center Values:

POST-ULTOR VOLTAGE	6000 max.	volts
ULTOR VOLTAGE.	2600 max.	volts
RATIO OF POST-ULTOR VOLTAGE TO ULTOR VOLTAGE.	2.3:1 max.	
GRID-No.3 VOLTAGE.	1000 max.	volts
GRID-No.1 VOLTAGE:		
Negative bias value.	200 max.	volts
Positive bias value.	0 max.	volts
Positive peak value.	2 max.	volts
PEAK VOLTAGE BETWEEN ULTOR AND ANY DEFLECTING ELECTRODE	500 max.	volts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode	180 max.	volts
Heater positive with respect to cathode	180 max.	volts

Equipment Design Ranges:

With any post-ultor voltage (E_{c5}) between 2000* and 6000 volts
and any ultor voltage (E_{c4}) between 1500** and 2600 volts

Grid-No.3 Voltage for Focus.	20% to 34.5% of E_{c4}	volts
Grid-No.1 Voltage for Visual Ex- tinction of Under- flected Focused Spot	-2.25% to -3.75% of E_{c4}	volts
Grid-No.3 Current for Any Operating Condition.	-15 to +10	μ amp
Deflection Factors:#		
When $E_{c5} = 2 \times E_{c4}$:		
DJ ₁ & DJ ₂	26.7 to 33.3	v dc/in./kv of E_{c4}
DJ ₃ & DJ ₄	20.3 to 25	v dc/in./kv of E_{c4}
When $E_{c5} = E_{c4}$:		
DJ ₁ & DJ ₂	21.5 to 26.5	v dc/in./kv of E_{c4}
DJ ₃ & DJ ₄	16 to 20	v dc/in./kv of E_{c4}
Spot Position.	##	

• At or near this rating, the effective resistance of the ultor supply should be adequate to limit the ultor input power to 6 watts.

* It is recommended that the post-ultor voltage be not less than 3000 volts for high-speed scanning.

** Recommended minimum value of ultor voltage.

With heater voltage of 6.3 volts, post-ultor voltage of 4000 volts, ultor voltage of 2000 volts, grid-No.3 voltage adjusted to give focus, grid-No.1 voltage adjusted to give spot that is just visible, each deflecting electrode connected through a 1-megohm resistor to ultor, and the tube shielded from all extraneous fields, the center of the undeflected, focused spot will fall within a circle having an 8-mm radius concentric with the center of the tube face.

#: See next page.



5ADPI

5ADPI

OSCILLOGRAPH TUBE

Examples of Use of Design Ranges:

With post-ultor voltage of	2000	3000	4000	volts
and ultor voltage of	2000	1500	2000	volts

Grid-No.3

Voltage for

Focus	400 to 690	300 to 515	400 to 690	volts
-----------------	------------	------------	------------	-------

Grid-No.1

Voltage for

Visual Ex-

tinction of

Undelected

Focused Spot. .	-45 to -75	-34 to -56	-45 to -75	volts
-----------------	------------	------------	------------	-------

Deflection

Factors:#

DJ ₁ & DJ ₂ . . .	43 to 53	40 to 50	53.4 to 66.6 v dc/in.
---	----------	----------	-----------------------

DJ ₃ & DJ ₄ . . .	32 to 40	30.5 to 37.5	40.6 to 50 v dc/in.
---	----------	--------------	---------------------

Maximum Circuit Values:

Grid-No.1-Circuit Resistance.	1.5 max.	megohms
---------------------------------------	----------	---------

Resistance in Any Deflecting-

Electrode Circuit [#]	5.0 max.	megohms
--	----------	---------

SPECIAL PERFORMANCE DATA

With post-ultor voltage of	3000 volts
and ultor voltage of	1500 volts

Line Width [•]	0.030 max.	inch
-----------------------------------	------------	------

Peak Grid-No.1 Drive from

Spot Cutoff [•]	45 max.	volts
------------------------------------	---------	-------

Raster Shape.	§
-----------------------	---

[#] The deflecting electrodes in the 5ADPI are designed to have extra-high deflection sensitivity and consequently produce less than full-screen deflection. With post-deflection acceleration, the length of deflection in either horizontal or vertical direction may be limited to 4-1/4 inches; without post-deflection acceleration, deflection to full screen diameter will ordinarily be obtained.

[■] It is recommended that the deflecting-electrode-circuit resistances be approximately equal.

[•] Under the following conditions: heater voltage of 6.3 volts, brightness of 15 foot-lamberts measured on a 2" x 2", 49-line raster with high-frequency scanning applied to deflecting electrodes DJ₁ and DJ₂. For line-width measurement, the high-frequency scanning is adjusted to give a raster width of 12 cm with the grid-No.3 voltage adjusted to give sharpest focus at center of tube face. Raster height is contracted until individual scanning lines are just barely distinguishable. Line width is expressed as the quotient of the contracted raster height measured at the center line of the tube face divided by the number of scanning lines (49).


[§] Under the following conditions: heater voltage of 6.3 volts, grid-No.3 voltage adjusted for focus, and grid-No.1 voltage adjusted to give visible raster. With 49-line raster, the size of which is adjusted so that the widest points on the raster just touch the sides of a square 3.075" on a side, no point on the raster sides will lie within an inscribed square 2.925" on a side having its sides parallel to the sides of the 3.075" square and its center at the center of the 3.075" square.

5ADPI



5ADPI

OSCILLOGRAPH TUBE

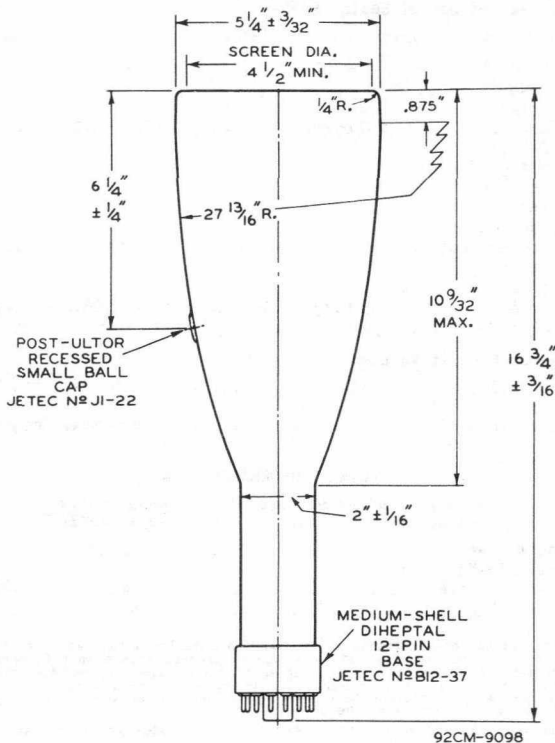

CL OF BULB WILL NOT DEVIATE MORE THAN 2° IN ANY DIRECTION FROM PERPENDICULAR ERECTED AT CENTER OF BOTTOM OF BASE.

THE PLANE THROUGH TUBE AXIS AND EACH OF THE FOLLOWING ITEMS MAY VARY FROM THE TRACE PRODUCED BY DJ_1 AND DJ_2 BY THE FOLLOWING TOLERANCES (MEASURED ABOUT THE TUBE AXIS): PIN 5, $\pm 10^{\circ}$; SIDE TERMINAL (ON SAME SIDE OF TUBE AS PIN 5), $\pm 10^{\circ}$. ANGLE BETWEEN $DJ_1 - DJ_2$ TRACE AND $DJ_3 - DJ_4$ TRACE IS $90^{\circ} \pm 1^{\circ}$.

DJ_1 AND DJ_2 ARE NEARER THE SCREEN. DJ_3 AND DJ_4 ARE NEARER THE BASE. WITH DJ_1 POSITIVE WITH RESPECT TO DJ_2 , THE SPOT WILL BE DEFLECTED TOWARD PIN 5; LIKewise, WITH DJ_3 POSITIVE WITH RESPECT TO DJ_4 , THE SPOT WILL BE DEFLECTED TOWARD PIN 2.




5ADP1

5ADP1

AVERAGE CHARACTERISTICS

 $E_f = 6.3$ VOLTSGRID-N₃ VOLTS ADJUSTED FOR FOCUS.

CURVE	ELECTRODE CURRENT	ULTOR VOLTS	POST-ULTOR VOLTS
A	ULTOR	2000	4000
B	ULTOR	1500	3000
C	POST-ULTOR	2000	4000
D	POST-ULTOR	1500	3000

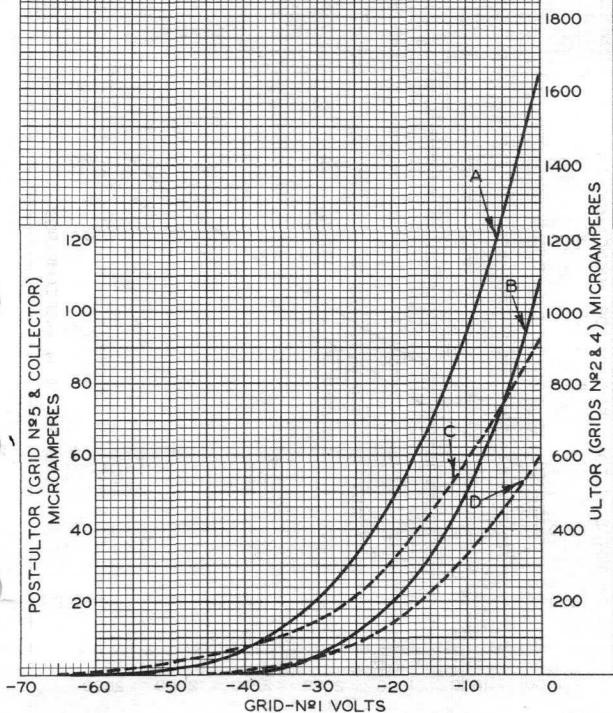

TUBE DIVISION

92CM-9099

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

5ADPI




5ADPI

CHARACTERISTICS

 $E_f = 6.3$ VOLTSGRID-N^o3 VOLTS ADJUSTED FOR FOCUS.POST-ULTOR (GRID N^o 5 & COLLECTOR) VOLTS
GREATER THAN ULTOR (GRIDS N^o 2 & N^o 4)
VOLTS.GRID-N^o1 VOLTS=0

— MAX. TOTAL CURRENT FOR ANY TUBE.

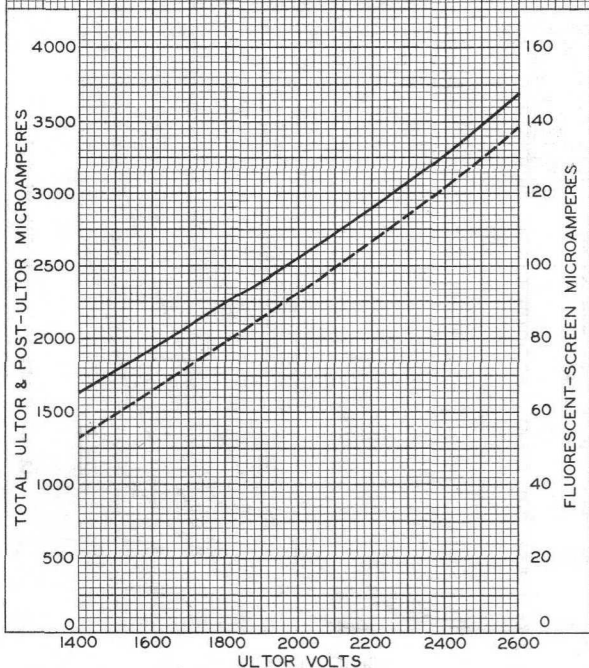- - - TYPICAL FLUORESCENT-SCREEN
(POST-ULTOR) CURRENT.

TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-7910



5ADPI

5ADPI

TYPICAL CHARACTERISTICS

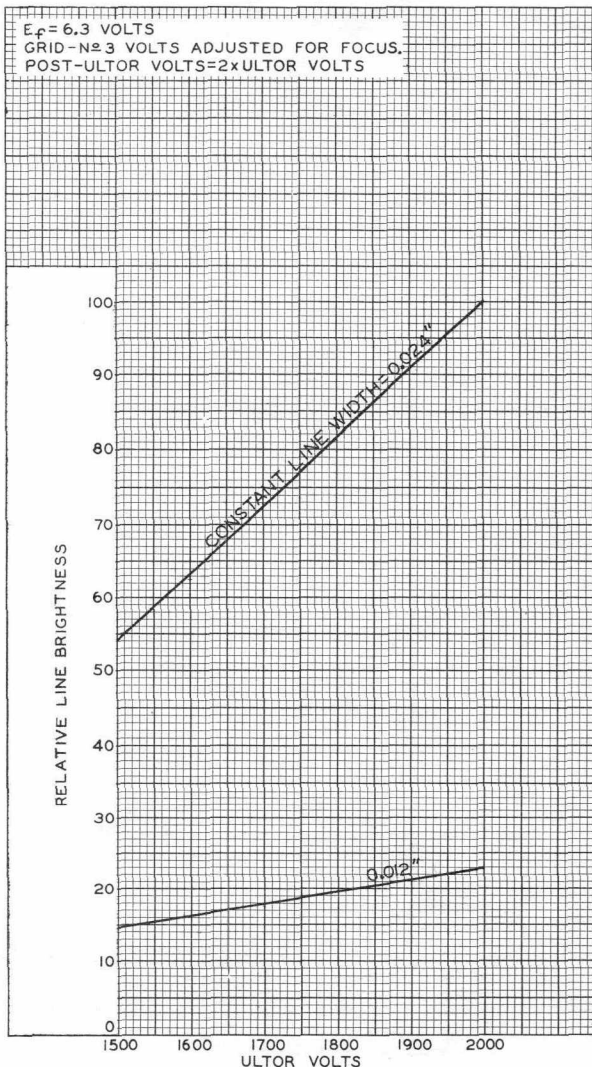

TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-6820R1

