



Coaxial Repeater Pentode

5A/152M

5A/152M

CATHODE.

Indirectly heated Oxide coated

Voltage	6.3	V
Nominal current	0.47	A

RATING.

Mutual conductance (at 1a 10mA)	7.5	mA/V
---------------------------------	-----	------

INTER-ELECTRODE CAPACITIES.

Grid to anode	0.018	pF
Input	10	pF
Output	5	pF

DIMENSIONS.

Maximum overall length	80.2	mm.
Maximum seated height	66.7	mm.
Maximum diameter	30.15	mm.
Net weight	28.5	grms.

MAXIMUM RATINGS.

Maximum direct anode voltage	250	V
Maximum direct screen voltage	150	V
Maximum direct screen current	5	mA
Maximum anode dissipation	5	W
Equivalent noise resistance	670	Ω

5A/152M

Coaxial Repeater Pentode

5A/152M



TYPICAL OPERATING CONDITIONS.


Direct anode voltage	250	V
Direct anode current	10	mA
Direct screen voltage	150	V
Direct screen current	2	mA
Direct suppressor voltage	0	V
Load impedance	6,000	Ω
Power output	50	mW
Distortion	<5	%



Coaxial Repeater Pentode

5A/152M


5A/152M

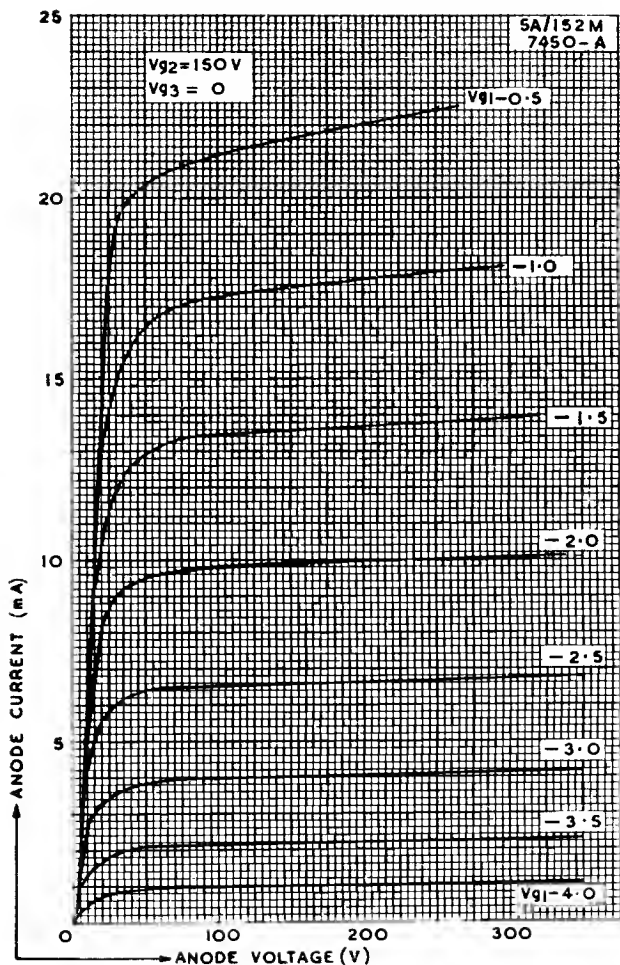

5A/152M

Coaxial Repeater Pentode



5A/152M

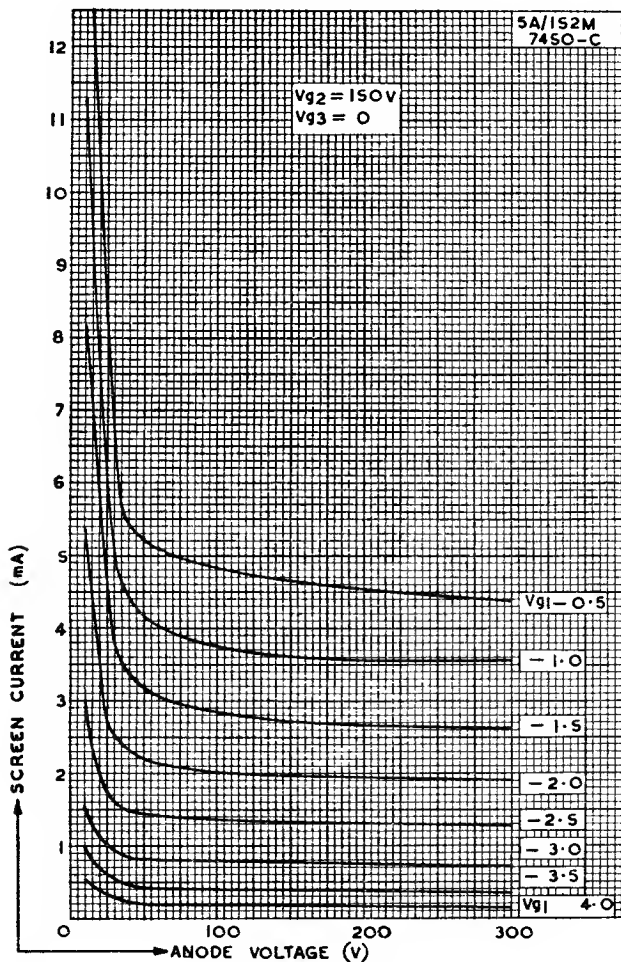



Coaxial Repeater Pentode

5A/152M

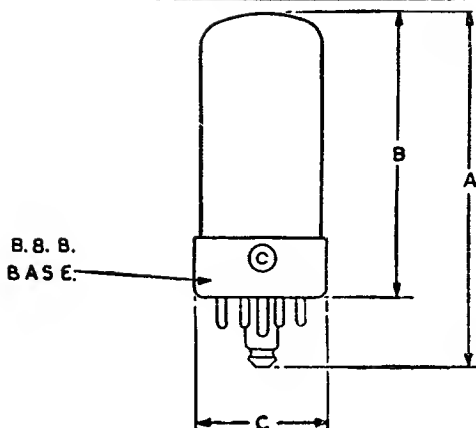

BASING

- 1 HEATER
- 2 ANODE
- 3 GRID 2
- 4 GRID 3
- 5 SHIELDS
- 6 GRID 1
- 7 CATHODE
- 8 HEATER

DIM	MILLIMETRES	INCHES
A	80.2 MAX	3 5/32 MAX
B	66.7 MAX	2 5/8 MAX
C	30.15 MAX	1 3/16 MAX

NOTE. BASIC FIGURES ARE INCHES

