



5AS4-A

5AS4-A

# FULL-WAVE VACUUM RECTIFIER

## GENERAL DATA

### Electrical:


Filament, Coated:

Voltage. . . . . 5 . . . . . ac volts  
Current. . . . . 3 . . . . . amp

### Mechanical:


Mounting Position. . . . . Vertical, base up or down, or  
Horizontal with pins 1 and 4 in vertical plane  
Maximum Overall Length . . . . . 4-1/4"  
Maximum Seated Length. . . . . 3-11/16"  
Maximum Diameter . . . . . 1-9/16"  
Bulb . . . . . T12  
Base . . . . . Short Medium-Shell Octal 8-Pin  
with External Barriers, Style B (JETEC No. B8-118),  
or Short Medium-Shell Octal 5-Pin  
with External Barriers, Style B (JETEC No. B5-121)  
Basing Designation for BOTTOM VIEW . . . . . 5T

Pin 1 - No Connection  
Pin 2 - Filament  
Pin 3 - Same as Pin 1  
Pin 4 - Plate No. 2



Pin 5 - Same as Pin 1  
Pin 6 - Plate No. 1  
Pin 7 - Same as Pin 1  
Pin 8 - Filament

MAXIMUM RATINGS, TYPICAL OPERATION, and CURVES  
for Type 5AS4-A are the same as those shown for Type 5U4-GB

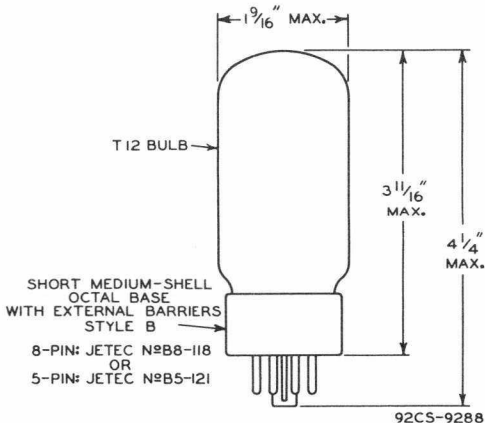

On the 5-pin base, pins 3, 5, and 7 are omitted.

