

Cathode Ray Tube for Television Reception.

12-INCH SCREEN

HEATER CHARACTERISTICS

Heater Voltage	...	...	...	...	Vf	= 4.0 volts
Heater Current	...	...	...	...	If	= 1.2 amps

OPERATING CHARACTERISTICS

Second Anode Voltage	...	...	...	...	Va2	= 4,000-5,000 volts
First Anode Voltage	...	...	...	...	Va1	= 250 volts
*Grid Voltage	...	...	...	...	-Vg	= 0-60 volts

Cathode internally connected to Heater—

Electromagnetic Deflection Sensitivity	...	Y = $\sqrt{\frac{13L}{Va2}}$ mm. per Gauss.
--	-----	---

(Where L is the length of deflection zone in millimetres and Va2 the second anode voltage.)

Ampere turns for focusing coil	...	...	= 500 A.T.
--------------------------------	-----	-----	------------

INPUT CAPACITY

Grid to all other Electrodes	...	...	Cg	= 6.0 μ F
------------------------------	-----	-----	----	---------------

FLUORESCENT COLOUR

White

DEFLECTION

Double Electromagnetic

LIMITS

Maximum Second Anode Voltage	...	...	Va2 _{max}	= 6,000 volts
Maximum First Anode Voltage	...	...	Va1 _{max}	= 250 volts

* The Grid Voltage should be adjusted to give the required light intensity. The voltage should never become positive or damage to the tube will result.

Mullard

TELEVISION TUBE





FIG. 1

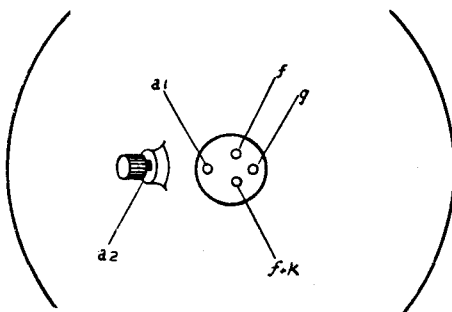

BOTTOM VIEW OF TUBE

FIG 2

DIMENSIONS IN M/M

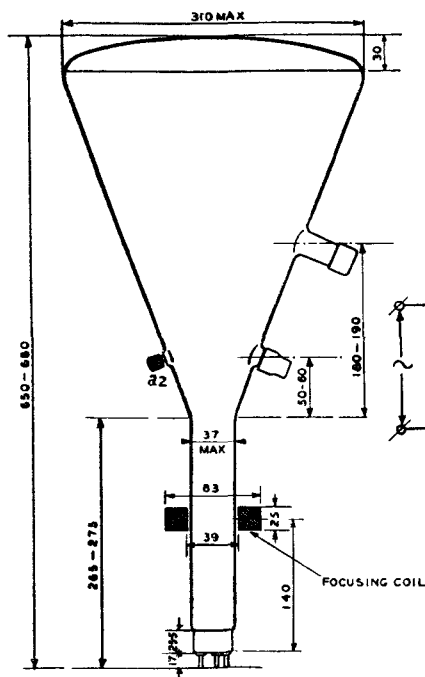


FIG 3

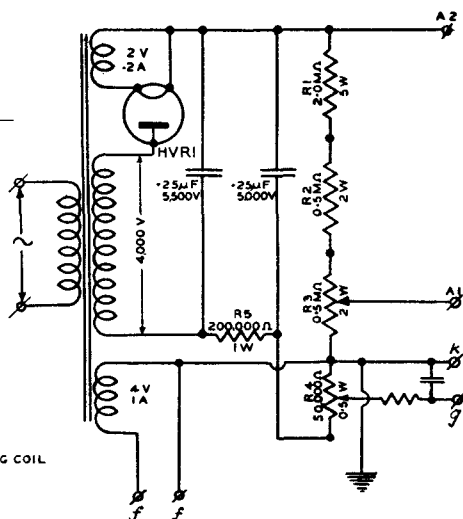


FIG 4