

DIAMETER 5" NOMINAL


5L01A**5L01A****Radar Tube**

ELECTROSTATIC FOCUS. MAGNETIC DEFLECTION

DATA**GENERAL:**

Heater : Voltage	4.0	ac or dc volts.
Current	1.0	amp.
Direct Inter-electrode Capacitances (Approx.)		
Modulator to All Other Electrodes	15 μ f.	
Anode 1 to All Other Electrodes	15 μ f.	
Cathode to All Other Electrodes	14 μ f.	
Screen :	Aluminium Backed.	
Fluorescence	Orange.	
Afterglow	Orange.	
Persistence of Afterglow	Long.	
Focusing Method	Electrostatic.	
Deflection Method	Magnetic.	
Overall Length	315 mm. $\pm$ 6 mm.	
Greatest Diameter of Bulb	127.5 mm.	
Minimum Useful Screen Diameter	108 mm.	
Mounting Position	Any.	
Anode Cap	Recessed Small Ball.	
Base	International Octal.	

Pin 1—No connection.
 Pin 2—Anode 1.
 Pin 3—Anode 2.
 Pin 4—No connection.



Pin 5—Modulator.
 Pin 6—Cathode.
 Pin 7—Heater.
 Pin 8—Heater.
 Cap—Final Anode.

Maximum Ratings


Final Anode Voltage	9000 volts.
Anode 1 Voltage—See Note 3	1450 volts.
Modulator Voltage :	
Negative bias value	100 volts.
Positive bias value	0 volts.
Peak Heater-Cathode Voltage :	
Heater negative with respect to cathode	125 volts.
Heater positive with respect to cathode	125 volts.

Typical Operation

Final Anode Voltage	7000 volts.
Anode 2 Voltage	1000 volts $\pm$ 100 volts.
Anode 1 Voltage	1250 volts.
Modulator Voltage for cut-off	-45 to -80 volts.
Spot Position—See Note 4	

Note 3. Anode 1 must always be at least 50v positive to Anode 2.

Note 4. The centre of the undeflected focused spot will fall within a circle having 9 mm. radius concentric with the centre of the tube face.

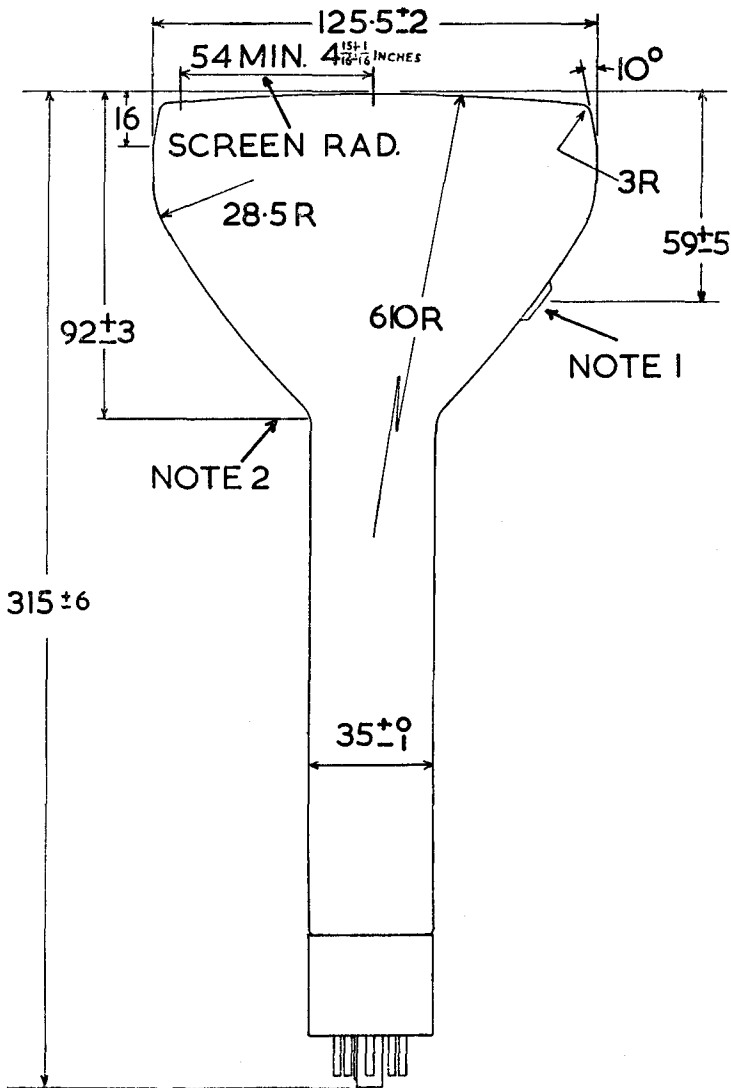

ALL SIZES IN MILLIMETRES

Note 1. The plane through the tube axis and the spigot key may vary from the plane through the tube axis and the anode terminal by an angular tolerance (measured about the tube axis) of 10° . Anode terminal is on the same side of tube as the spigot key.

Note 2. Reference line is determined by position where gauge 36 mm. I.D. and 50 mm. long will rest on bulb cone.