


TUNG-SOL

FULL-WAVE HIGH-VACUUM RECTIFIER

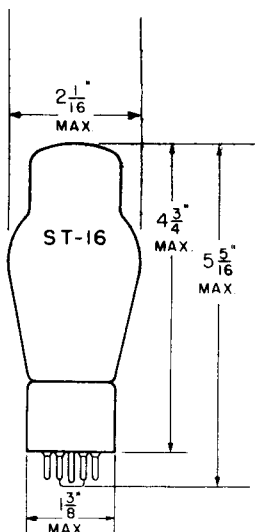

GLASS BULB

COATED FILAMENT


HEATER

5.0 VOLTS 2.0 AMPERES

AC

VERTICAL MOUNTING POSITION

HORIZONTAL OPERATION IS
PERMISSIBLE IF PINS 1 AND
4 ARE IN A VERTICAL PLANE.



BOTTOM VIEW

MEDIUM SHELL 5-PIN
OCTAL MICANOL BASE

THE 5R4GY IS DESIGNED FOR RECTIFIER USE IN EQUIPMENT REQUIRING A HIGH PEAK INVERSE VOLTAGE RATING. SATISFACTORY OPERATION OF THIS TUBE TYPE UNDER CONDITIONS FALLING WITHIN AREA 1 ON CURVE NO. 1 MAY BE OBTAINED WITHOUT FILAMENT PREHEATING. FILAMENT PREHEATING FOR 10 SECONDS BEFORE PLATE VOLTAGE IS APPLIED IS RECOMMENDED FOR SATISFACTORY OPERATION UNDER CONDITIONS FALLING WITHIN AREA 2 ON THE SAME CURVE.

RATINGS

INTERPRETED ACCORDING TO RMA STANDARD M8-210

FULL-WAVE RECTIFIER

FILAMENT VOLTAGE (AC)	5.0	5.0	5.0	VOLTS
FILAMENT CURRENT	2.0	2.0	2.0	AMPS.
MAX. PEAK INVERSE PLATE VOLTAGE (NO LOAD)	2100	2400	2800	VOLTS
MAX. PEAK PLATE CURRENT PER PLATE	650	650	650	MA.
DC OUTPUT CURRENT:				
WITH CONDENSER INPUT TO FILTER	250	175	150	MA.
WITH CHOKE INPUT TO FILTER	250	250 ^A	175 ^B	MA.

^A FOR INPUT CHOKE FILTER=5 HENRIES MINIMUM.

^B FOR INPUT CHOKE FILTER=10 HENRIES MINIMUM.

CONTINUED ON FOLLOWING PAGE

CONTINUED FROM PRECEDING PAGE

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS
FULL-WAVE RECTIFIER

AC PLATE-TO-PLATE SUPPLY VOLTAGE (RMS)	CONDENSER- INPUT FILTER		CHOKE- INPUT FILTER		VOLTS
	FULL LOAD	NO LOAD	1500	1900	
FILTER INPUT CONDENSER					
TOTAL EFFECTIVE PLATE SUPPLY IMPEDANCE PER PLATE	1400	1800	1700	2000	μf
FILTER INPUT CHOKE	4	4	-	-	
DC OUTPUT CURRENT	125	575	-	-	OHMS
DC OUTPUT VOLTAGE (APPROX.) (AT INPUT TO FILTER)	-	-	5	10	H.
VOLTAGE REGULATION (APPROX.) (HALF-LOAD TO FULL-LOAD CURRENT)	250	250	250	175	MA.
	700	700	550	750	VOLTS
	90	110	40	60	VOLTS

C_P PEAK PLATE CURRENT WILL BE LIMITED TO MAXIMUM RATED VALUE FOR THE GIVEN CON-
DITIONS AND VALUES. FOR A FILTER-INPUT CONDENSER GREATER THAN 4 μf, MORE PLATE -
SUPPLY IMPEDANCE MAY BE REQUIRED TO LIMIT THE PEAK PLATE CURRENT TO THE RATED
VALUE.

