



5U1

5U1

OSCILLOGRAPH TUBE

ELECTROSTATIC FOCUS

ELECTROSTATIC DEFLECTION

General:

Heater, for Unipotential Cathode:

Voltage. $6.3 \pm 10\%$ ac or dc volts

Current. 0.6 amp

Direct Interelectrode Capacitances (Approx.):

Grid No.1 to All Other Electrodes. 8.0 μf DJ1 to DJ2 2.5 μf DJ3 to DJ4 2.5 μf DJ1 to All Other Electrodes. 11.0 μf DJ2 to All Other Electrodes. 8.0 μf DJ3 to All Other Electrodes. 7.0 μf DJ4 to All Other Electrodes. 8.0 μf

Phosphor (For Curves, see front of this Section) No.1

Fluorescence Green

Persistence. Medium

Focusing Method. Electrostatic

Deflection Method. Electrostatic

Overall Length $14\text{--}3\frac{1}{4}'' \pm \frac{3}{8}''$ Greatest Diameter of Bulb. $5\text{--}1\frac{1}{4}'' \pm \frac{3}{32}''$ Minimum Useful Screen Diameter $4\text{--}1\frac{1}{2}''$

Mounting Position. Any

Base Small-Shell Duodecal 12-Pin


Basing Designation for BOTTOM VIEW 12E

Pin 1-Heater

Pin 2-Grid No.1

Pin 3-Cathode

Pin 4-Anode No.1

Pin 5-Internal Con.
Do Not UsePin 6-Deflecting
Electrode DJ3Pin 7-Deflecting
Electrode DJ4Pin 8-Anode No.2,
Grid No.2Pin 9-Deflecting
Electrode DJ2Pin 10-Deflecting
Electrode DJ1Pin 11-Internal Con.
Do Not Use

Pin 12-Heater

*DJ₁ and DJ₂ are nearer the screen**DJ₃ and DJ₄ are nearer the base*

With DJ₁ positive with respect to DJ₂, the spot is deflected toward pin 4. With DJ₃ positive with respect to DJ₄, the spot is deflected toward pin 1.

The angle between the trace produced by DJ₁ and DJ₂ and its intersection with the plane through the tube axis and pin 1 does not exceed 10° .

The angle between the trace produced by DJ₃ and DJ₄ and the trace produced by DJ₁ and DJ₂ is $90^\circ \pm 30^\circ$.

SUPI



SUPI

OSCILLOGRAPH TUBE

Maximum Ratings, Design-Center Values:

ANODE-No.2 $\blacksquare$ VOLTAGE	2500 max.	volts
ANODE-No.1 VOLTAGE	1000 max.	volts
GRID-No.1 (CONTROL ELECTRODE) VOLTAGE:		
Negative bias value.	200 max.	volts
Positive bias value.	0 max.	volts
Peak positive value.	2 max.	volts
PEAK VOLTAGE BETWEEN ANODE No.2 AND ANY DEFLECTING ELECTRODE. . .	500 max.	volts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode.	125 max.	volts
Heater positive with respect to cathode.	125 max.	volts

Equipment Design Ranges:

For any anode-No.2 voltage (E_{b2}) between 1000* and 2500 volts

Anode-No.1 Voltage . . .	17% to 32% of E_{b2}	. . . volts
Max. Grid-No.1 Voltage for Visual Cutoff	4.5% of E_{b2}	. . . volts
Anode-No.1 Current for Any Operating Condition	-15 to +10	. . microamp
Deflection Factors:		
DJ1 & DJ2	28 to 38.5	v dc/in./kv of E_{b2}
DJ3 & DJ4	23 to 31	v dc/in./kv of E_{b2}

Examples of Use of Design Ranges:

For anode-No.2 voltages of

	1000	2000	volts
Anode-No.1 Voltage . . .	170-320	340-640	. . volts
Max. Grid-No.1 Voltage for Visual Cutoff	-45	-90	. . volts
Deflection Factors:			
DJ1 & DJ2	28-38.5	56-77	volts dc/in.
DJ3 & DJ4	23-31	46-62	volts dc/in.

Maximum Circuit Values:

Grid-No.1-Circuit Resistance	1.5 max.	megohms
Resistance in Any Deflecting Electrode Circuit $\blacksquare$. . .	5.0 max.	megohms

* Recommended minimum value.


$\square$ It is recommended that the deflecting-electrode-circuit resistances be approximately equal.

$\blacksquare$ Anode No.2 and grid No.2, which are connected together within tube, are referred to herein as anode No.2.

5U1



5U1 OSCILLOGRAPH TUBE

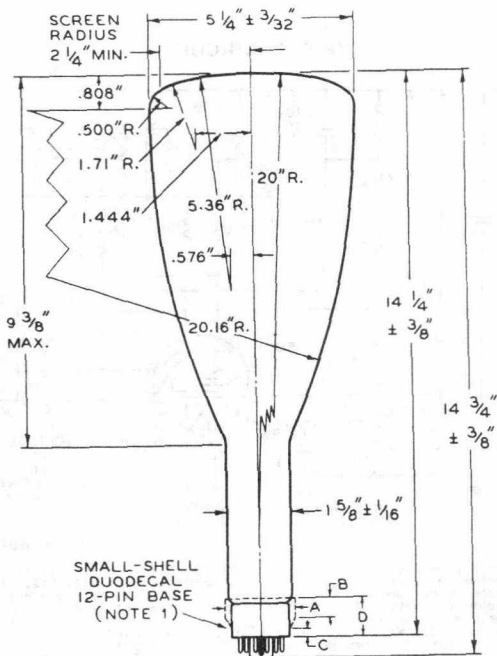

OF BULB WILL NOT DEVIATE MORE THAN 2° IN ANY DIRECTION FROM THE PERPENDICULAR ERECTED AT THE CENTER OF BOTTOM OF THE BASE.

NOTE 1: THIS BASE MAY BE SUPERSEDED BY AN ALTERNATE BASE WHICH WILL FIT THE SAME SOCKET BUT WHICH WILL HAVE A FLARED SHELL INDICATED BY THE DASHED LINES AND DIMENSIONED APPROXIMATELY AS FOLLOWS:

A = $1.85"$ MAX., B = $0.500"$, C = $0.200"$ MIN., D = $0.925"$.

92CM-6763




5U1

5U1

AVERAGE CHARACTERISTICS

$E_f = 6.3$ VOLTS
ANODE- $N\#1$ VOLTS ADJUSTED
FOR FOCUS

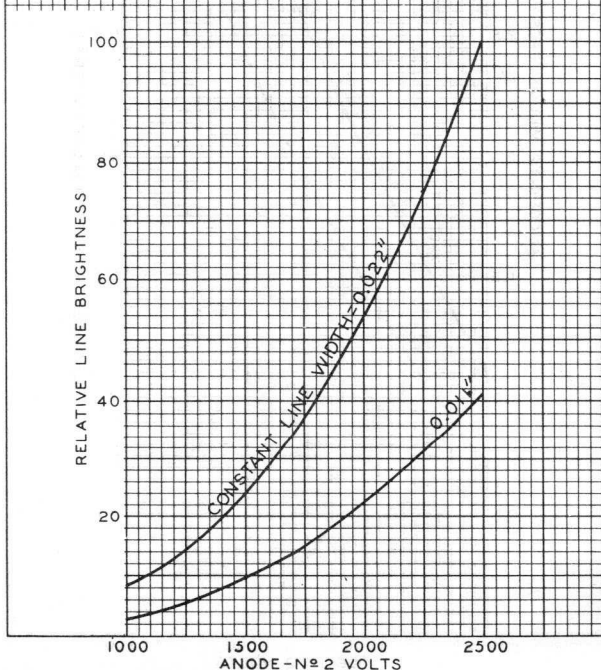

NOV. 7, 1946

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-6808

5U1



5U1

CHARACTERISTICS

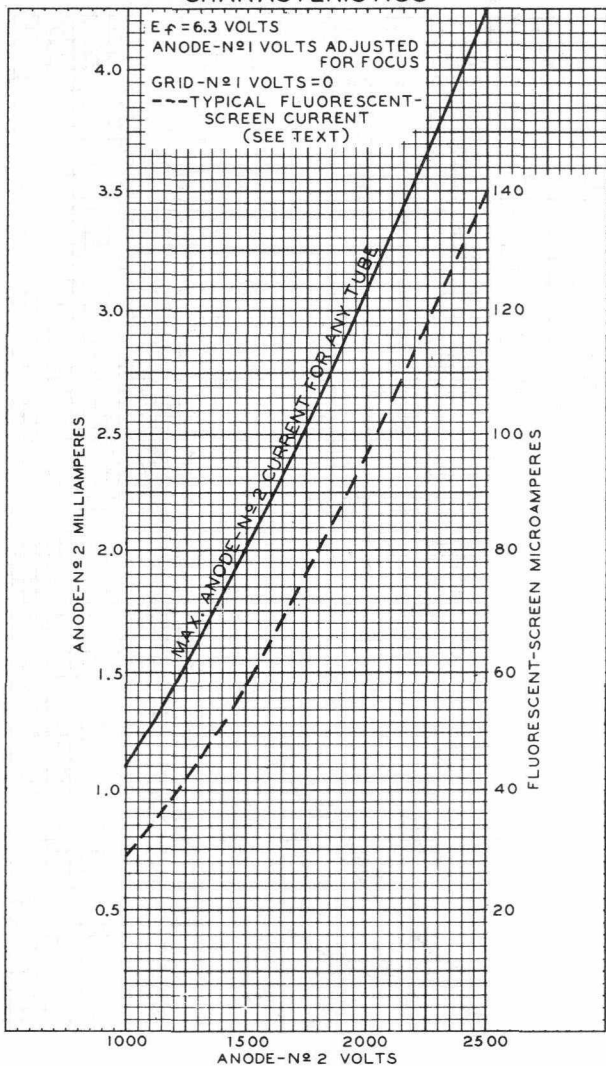

OCT. 21, 1949

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY


92CM-6811R1



5U1

5U1

AVERAGE CHARACTERISTICS

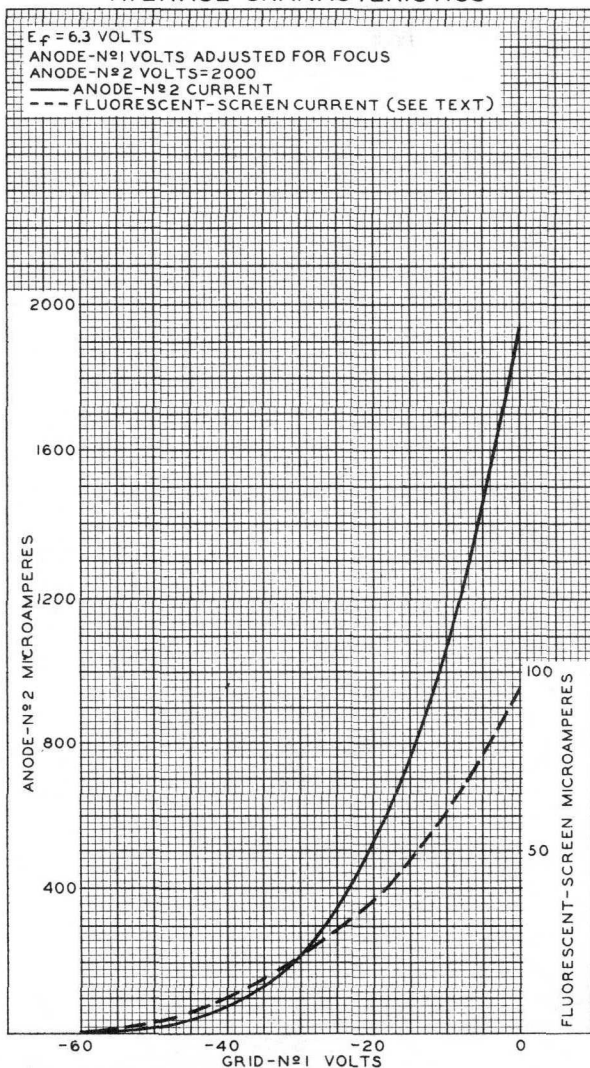

NOV. 11, 1946

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-6810

