



ADVANCE DATA

MECHANICAL DATA

Vibration (Non-Operating)	50 cycles - 10 G	
Maximum Altitude	10,000	Feet
Mounting Position	Any	
Overall Dimensions	5 3/8 x 5 1/4 x 4 29/64	Inches
Net Weight	4 3/4	Lbs.
Cooling	Convection Air	
Pressurization	45	psi abs.
Output Coupling	UG-40A/U	

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage - Preheat	1, 2	6.3 ± 10%	Volts
Heater Current at 6.3 Volts		.43 - .60	Amp
Minimum Preheat Time		2	Minutes

RATINGS (Absolute Maximum) ³

Heater Voltage	7.0	Volts
Peak Current	8.0	Amps
Peak Anode Voltage	8.0	kv
Average Power Input	80	Watts
Frequency Pulling at VSWR 1.5/1	15	mc
Anode Temperature	120°	C
Pulse Duration	2.5	μsecond
Duty Cycle	.0025	
Rate-of-Rise of Voltage	60	kv/μsecond
VSWR	1.5/1	
R F Bandwidth	2.5/tp	mc

TYPICAL OPERATION

Oscillation 1 Oscillation 2 ²

Pulse Recurrence Freq.	1000	2000	pps	
Pulse Duration	1.0	1.0	μsecond	
Peak Anode Voltage	6.9	6.5	kv	
Peak Anode Current	7.5	3.5	amps	
Average Anode Current	7.5	7.0	ma	
Useful Range of Average Current	6-7.5	7.0-12.0	ma	
Average Power Output	18		Watts	Min.
Input Capacitance		6	μuf	

NOTES:

1. The cathode heating time shall be a minimum of 120 seconds at temperature greater than 0°C and a minimum of 180 seconds at temperatures between 0°C and -55°C. For duty cycle greater than .001, reduce heater voltage according to manufacturer's recommendations.

QUICK REFERENCE DATA

Sylvania Type 6027 magnetron is similar to the 2J42, but is supplied with an additional magnet which increases the magnetic gap field. This permits higher power outputs as shown in the accompanying "operating characteristics" graphs.

The 6027 is a pulsed, fixed frequency (9345-9405 mc) magnetron.

The unit is supplied with magnets in place.

SYLVANIA ELECTRIC
PRODUCTS INC.

ELECTRONICS DIVISION
WOBURN, MASS.

Prepared and Released By The
TECHNICAL PUBLICATIONS SECTION
EMPORIUM, PENNSYLVANIA

February 14, 1956


SYLVANIA

6027

Page 2

NOTES:

2. Reduce heater voltage to 4.5 volts three seconds after applying high voltage.
3. The values specified are based on the "absolute system" and are not to be exceeded under any service conditions. The ratings are limiting values above which serviceability of any individual tube may be impaired. It does not necessarily follow that combinations of absolute maximum ratings can be attained simultaneously.

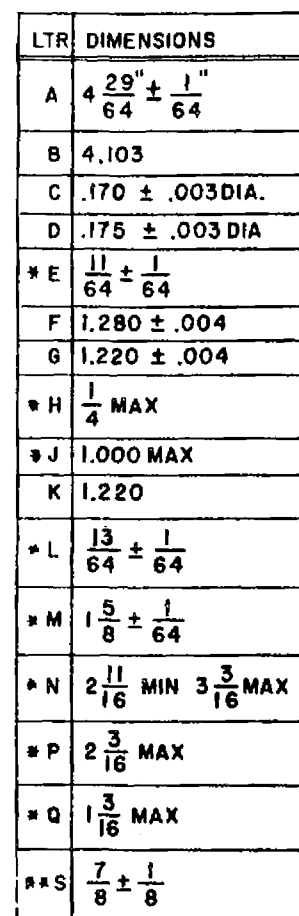

Note 9: Make anode temperature measurements at this point on round anode surface between radiator fin and pole piece.

FIG. 1
TYPE 6027 RIEKE DIAGRAM
Peak Anode Current - 8 Amp
Pulse Duration - $1 \mu \text{sec}$
P.R.F - 1000


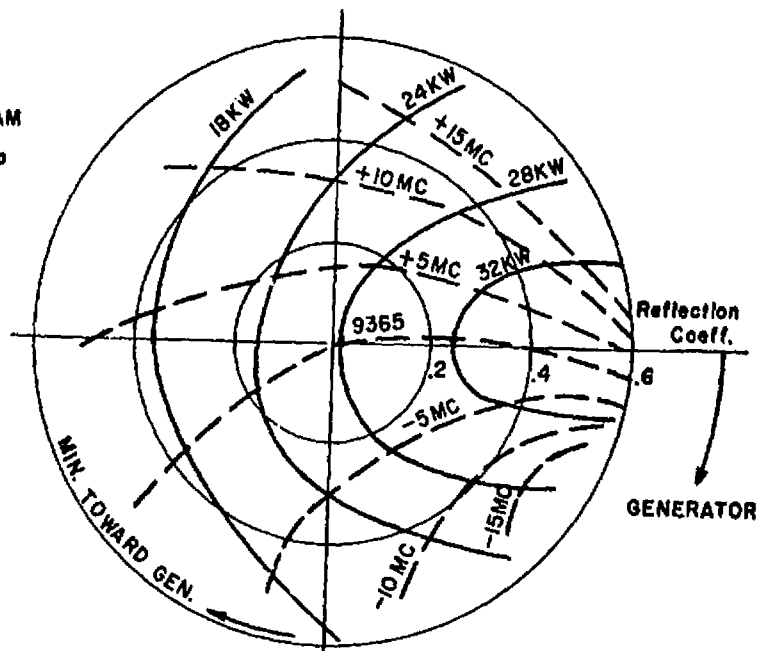


FIG. 2
TYPE 6027 OPERATING CHARACTERISTICS

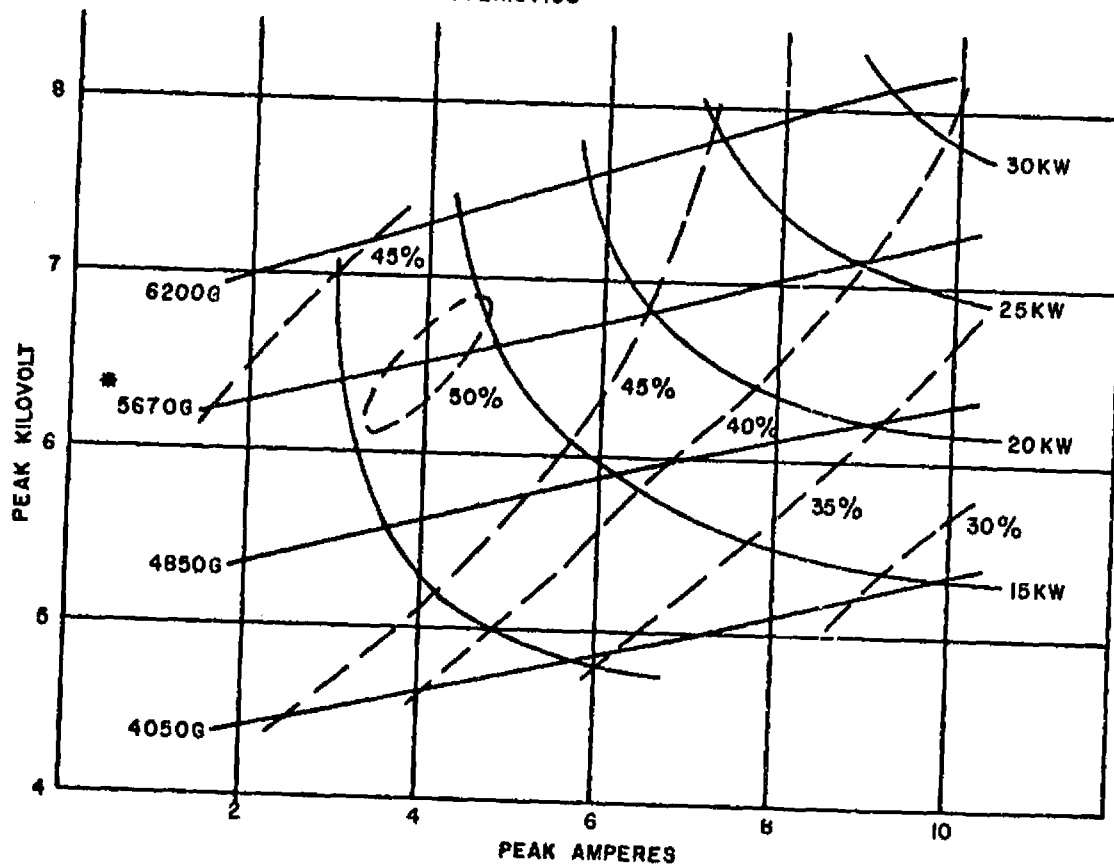

* Operating Line for
Standard Attached
Magnet.

Frequency 9375 mc/s
Pulse Duration $1 \mu \text{s}$
1000 Pulses/s
15 mc/s pulling (max)