


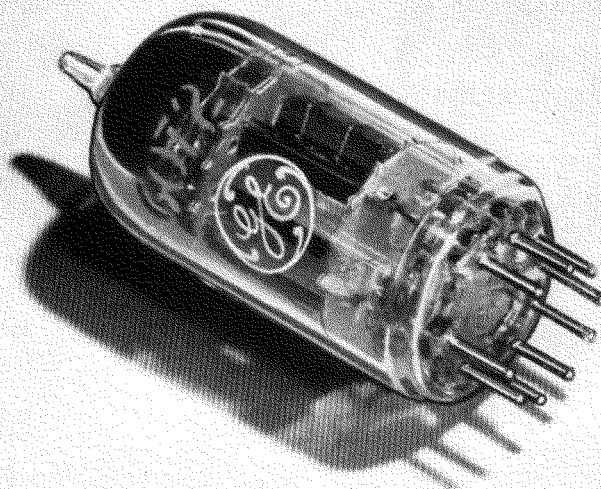

TWIN TRIODE

DESCRIPTION

The GL-6072 is a low-noise, low-microphonic miniature twin triode intended primarily for use in the low-level stages of high-gain audio-frequency amplifiers. The tube is specially designed to assure dependable life and reliable service under the ex-

acting conditions encountered in mobile and aircraft applications. Additional features include mechanical ruggedization and a heater-cathode construction designed to withstand many thousand cycles of intermittent operation.

TECHNICAL INFORMATION

GENERAL

Electrical Data

Cathode—Coated Unipotential

Heater Voltage (A-c or D-c).....	6.3	12.6 Volts
Heater Current.....	350	175 Milliamperes

Direct Interelectrode Capacitances*

Grid to Plate (Each Section).....	1.4 uuf
Input (Each Section).....	1.4 uuf
Output (Section Number 1).....	0.5 uuf
Output (Section Number 2).....	0.4 uuf

Mechanical Data

Mounting Position—Any

Envelope—T-6½ Glass

Base—Small Button 9-Pin, E9-1


Electronic
TUBE

GENERAL  ELECTRIC

TECHNICAL INFORMATION (CONT'D)

MAXIMUM RATINGS

Electrical—Design Center Values—Each Section

Plate Voltage.....	300 Volts
Positive D-c Grid Voltage.....	0 Volt
Plate Dissipation.....	1.5 Watts
Heater-Cathode Voltage.....	90 Volts
Mechanical	
Peak Impact Acceleration in Any Direction.....	600 G

CHARACTERISTICS AND TYPICAL OPERATION

Class A₁ Amplifier—Each Section

Plate Voltage.....	250 Volts
Grid Voltage.....	−4.0 Volts
Amplification Factor.....	44
Plate Resistance, approximate.....	25000 Ohms
Transconductance.....	1750 Micromhos
Plate Current.....	3.0 Milliamperes
Grid Voltage, approximate, I _b = 10 Microamperes.....	−8 Volts


Low-Level-Amplifier Service—Each Section

Heater Voltage**.....	6.3 Volts
Plate-Supply Voltage.....	150 Volts
Plate Load Resistor.....	20000 Ohms
Grid Resistor.....	0.1 Megohm
Cathode Resistor.....	2700 Ohms
Cathode Capacitor.....	40 Microfarads
Voltage Gain.....	12.5


* Without external shield.

** Pin 9 connected to negative B supply.

GL-6072
AVERAGE CHARACTERISTICS
EACH SECTION
E_f = 12.6 VOLTS

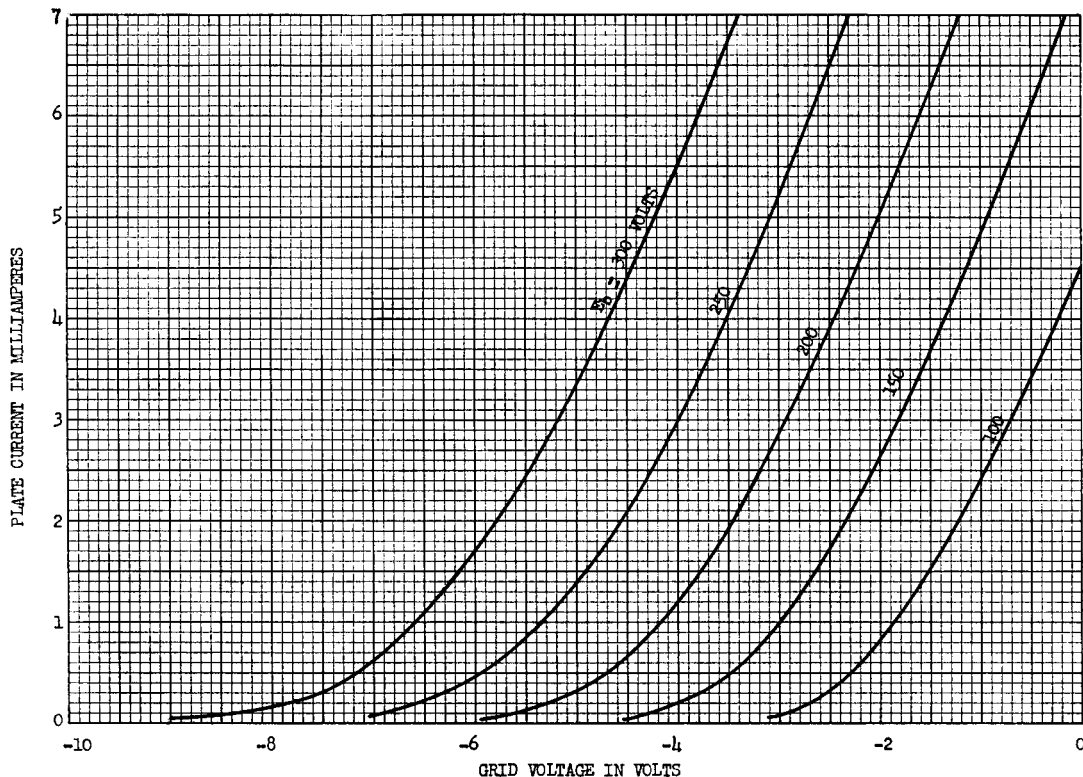


GL-6072
AVERAGE PLATE CHARACTERISTICS
E_t = 12.6 VOLTS

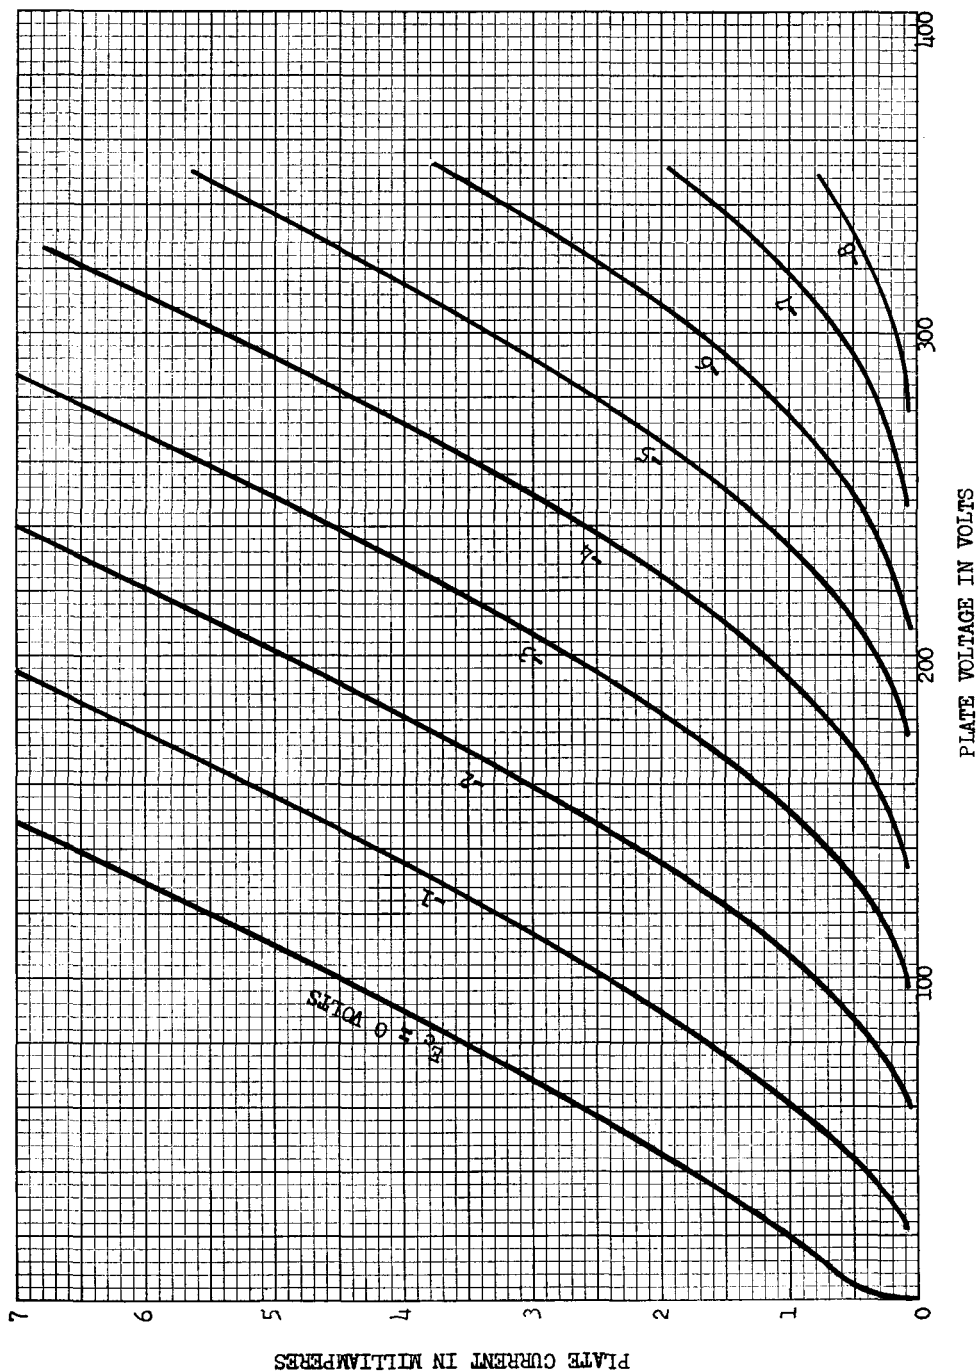

10-2-51

K-69087-72A501


GL-6072
AVERAGE CHARACTERISTICS
EACH SECTION
 $E_f = 12.6$ VOLTS $E_b = 250$ VOLTS

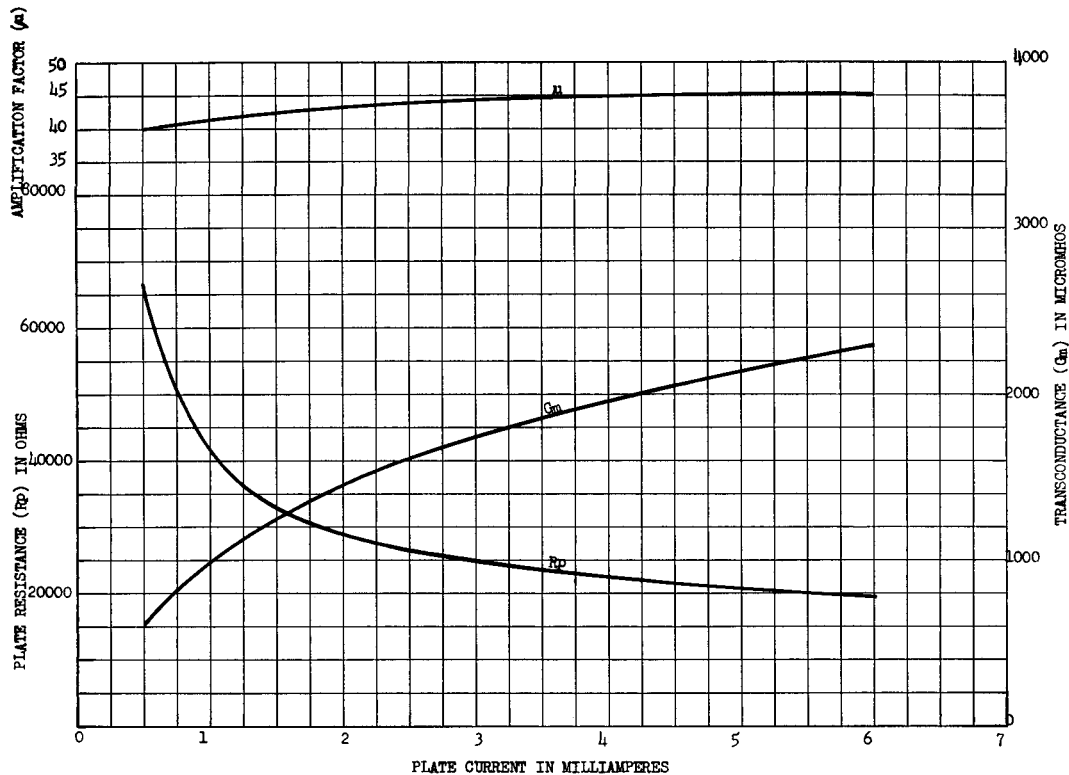


K-69087-72A498

10-26-51

OUTLINE

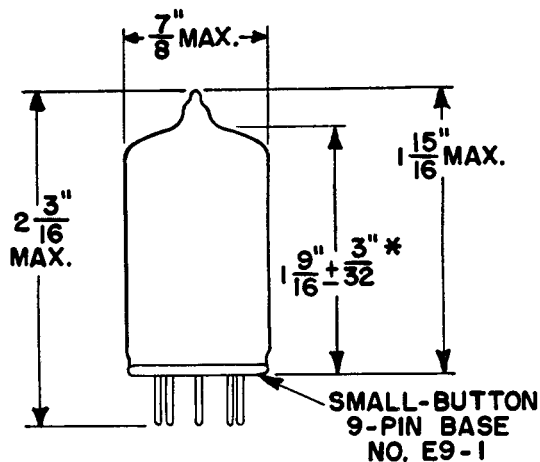

BASING DIAGRAM



9A

- PIN 1: PLATE (SECTION NO. 2)
- PIN 2: GRID (SECTION NO. 2)
- PIN 3: CATHODE (SECTION NO. 2)
- PIN 4: HEATER
- PIN 5: HEATER
- PIN 6: PLATE (SECTION NO. 1)
- PIN 7: GRID (SECTION NO. 1)
- PIN 8: CATHODE (SECTION NO. 1)
- PIN 9: HEATER CENTER-TAP

* MEASURED FROM BASE SEAT TO BULB-TOP LINE
AS DETERMINED BY RING GAGE OF $\frac{7}{16}$ " I.D.

N-15155AZ

10-26-51

Tube Department

GENERAL ELECTRIC
Schenectady, N. Y.