



Excellence in Electronics

TYPE CK6111WA

The CK6111WA is a heater-cathode type medium-mu double triode of subminiature construction, capable of operation in the UHF region. This tube is characterized by long life and stable performance. It is designed for service where severe conditions of high temperature and mechanical shock or vibration are encountered. The flexible terminal leads may be soldered or welded directly to the terminals of circuit components without the use of sockets. Standard 8-Pin subminiature sockets may be used by cutting the leads to a suitable length.

MECHANICAL DATA

ENVELOPE: T-3 Glass

BASE: Subminiature Button 8-Pin (0.17" tinned flexible leads.
Length: 1.5" min.)

TERMINAL CONNECTIONS:


Lead 1 Plate, Unit #2	Lead 5 Cathode, Unit #1
Lead 2 Grid, Unit #2	Lead 6 Heater
Lead 3 Heater	Lead 7 Grid, Unit #1
Lead 4 Cathode, Unit #2	Lead 8 Plate, Unit #1

MECHANICAL RATINGS:

Maximum Impact Acceleration (Shock Test-Note 3)	450 G
Maximum Uniform Acceleration (Centrifuge Test-Note 4)	1000 G
Maximum Vibrational Acceleration (96 Hour Fatigue Test-Note 5)	2.5 G
Maximum Bulb Temperature	220 °C

MOUNTING POSITION: Any

CAUTION----- To Electronic Equipment Design Engineers: Special attention should be given to the temperature at which the tubes are to be operated. Reliability will be seriously impaired if maximum bulb temperature is exceeded. The life expectancy may be reduced if conditions other than those specified for life test are imposed on the tube and will be reduced appreciably if maximum ratings are exceeded. Life and reliability of performance are closely related to the degree that regulation of the heater voltage is maintained at its center rated value.

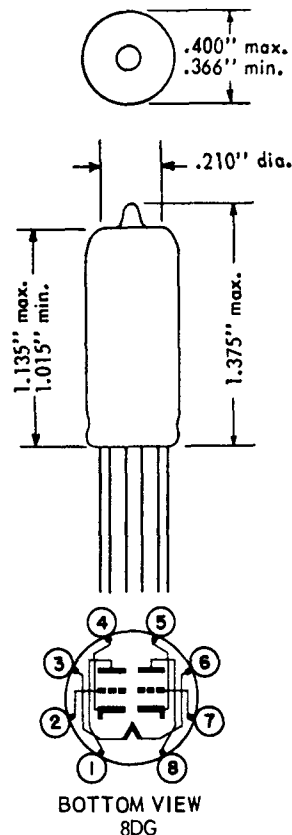

RATINGS AND NORMAL OPERATION:	MIL-E-1 SYMBOL	DESIGN MINIMUM	NORMAL TEST CONDITIONS (Note 7)	NORMAL OPERATION (Note 6)	DESIGN MAXIMUM	MIL-E-1 UNITS
Heater Voltage (Note 8)	Ef:	6.0	6.3	6.3	6.6	V
Plate Voltage	Eb:	----	100	100	250	Vdc
Peak Plate Voltage	eb:	----	----	----	360	v
Grid #1 Voltage	Ec1:	-55	0	0	----	Vdc
Plate Dissipation (per plate)	Pp/p:	----	----	0.85	0.95	W
Grid #1 Circuit Resistance	Rg/g:	----	----	1.0	1.1	Meg.
Heater-Cathode Voltage	Ehk:	-200	----	100	+200	v
Plate Current (per plate)	Ib/p:	0.5	----	8.5	22	mA _{dc}
Grid Current (per grid)	Ic/c:	----	----	----	5.5	mA _{dc}
Cathode Resistance (per unit)	Rk:	----	220	220	----	ohms
Transconductance (per plate)	Sm/p:	----	----	5000	----	μmhos
Amplification Factor	Mu/p	----	----	20	----	----

Tentative Data

INDUSTRIAL TUBE DIVISION

RAYTHEON COMPANY



RELIABLE SUBMINIATURE DOUBLE TRIODE

ELECTRICAL DATA (Cont'd)

CHARACTERISTICS AND QUALITY CONTROL TESTS (Note 1)

(In the following test, each unit is tested separately)

TEST	CONDITIONS	AQL %	MIL - E - 1 SYMBOL	MIN.	LAL	BOGIE	UAL	MAX	ALD	MIL - E - 1 UNITS
MEASUREMENTS ACCEPTANCE TESTS, PART 1		Combined AQL = 1.0 % excluding Mechanical and Inoperatives								
Heater Current:		0.4	If:	285	----	----	----	315	----	mA
Heater - Cathode Leakage (1):	Ehk = +100 Vdc Ehk = -100 Vdc	0.4	Ihk (1): Ihk (1):	----	----	----	----	3.5 3.5	----	μ Adc μ Adc
Grid Current:	Rg = 1.0 Meg.	0.4	Ic (1):	----	----	----	----	-0.3	----	μ Adc
Plate Current (1):		0.4	Ib (1):	6.0	7.5	8.5	9.5	11.0	2.8	mA
Plate Current (2):	Ec1 = -9.0 Vdc	0.4	Ib (2):	----	----	----	----	100	----	μ Adc
Transconductance (1):		0.4	Sm (1):	4100	4650	5000	5350	5900	1000	μ mhos
Continuity and Shorts (Inoperatives):	(Note 12)	0.4	----	----	----	----	----	----	----	----
Mechanical:	Envelope (8 - 1) (Note 10)	----	----	----	----	----	----	----	----	----
MEASUREMENTS ACCEPTANCE TESTS PART 2										
Insulation of Electrodes:	Ef = 6.3 V Eg - all = -100 Vdc Ep - all = -300 Vdc	2.5	Rg1 - all: 250 Rp - all: 250	----	----	----	----	----	----	Meg. Meg.
Plate Current (1) Difference between sections:		2.5	Δ Ib:	----	----	----	----	1.5	----	mA
Transconductance (2):	Ef = 5.7 V (Note 9)	2.5	Δ EfSm(2)	----	----	----	----	10	----	%
Grid Emission:	Ef = 7.5 V; Rg/g = 1.0 Meg.; Eb = 250 Vdc; Rk/k = 2900 ohms pre-heat 5 minutes at Ec1 = 0, test at Ec1 = -20 Vdc	6.5	Isc1:	----	----	----	----	-0.5	----	μ Adc
AF Noise:	Esig = 65 mVac; Rg1 = 0.1 Meg.; Rp = 0.01 Meg.; Rk = 100 ohms; Ck = 1000 μ f Units connected in parallel	2.5	EB:	----	----	----	----	17	----	VU
Amplification Factor:		6.5	Mu:	17	----	20	----	23	----	----
Pulse Emission (1):	Eb = 150 Vdc; Ec1 = -25 Vdc; tp = 10 μ sec; duty cycle = 1%; egk = +30 v; Rk/k = 1.0 ohm; (Note 13)	2.5	$\left\{ \begin{array}{l} i_k \\ \Delta_{tp} i_k \end{array} \right.$	320	----	----	----	10	----	ma %
Pulse Emission (2):	Ef = 5.9 V; Eb = 150 Vdc; Ec1 = -25 Vdc; tp = 10 μ sec duty cycle = 1%; egk = +30 v; Rk/k = 1.0 ohm; (Note 13)	6.5	ik:	300	----	----	----	----	----	ma
Heater - Cathode Leakage (2):	Ef = -6.7 V (pin 6 negative); Ehk = +100 Vdc; (cathode negative); t = 16 seconds (Note 14)	6.5	Ihk (2):	----	----	----	----	1.0	----	μ Adc
Capacitance:			Cgp:	1.2	----	1.5	----	1.8	----	μ f
Capacitance:			Cin:	1.4	----	1.9	----	2.4	----	μ f
Capacitance:	(Note 2)	6.5	Cout (Unit #1)	0.20	----	0.28	----	0.36	----	μ f
Capacitance:			Cout (Unit #2)	0.22	----	0.32	----	0.42	----	μ f
Capacitance:			Cgg:	----	----	----	----	0.011	----	μ f
Capacitance:			Cpp:	----	----	----	----	0.50	----	μ f

INDUSTRIAL TUBE DIVISION

RAYTHEON MANUFACTURING COMPANY

55 CHAPEL ST., NEWTON 58, MASS.



RELIABLE SUBMINIATURE DOUBLE TRIODE

ELECTRICAL DATA (Cont'd)

CHARACTERISTICS AND QUALITY CONTROL TESTS (cont'd)

(In the following test, each unit is tested separately)

TEST	CONDITIONS	AQL %	MIL - E - 1 SYMBOL	MIN	MAX	MIL - E - 1 UNITS	Allowable Defects per Characteristic 1st Sample	Combined Samples
MEASUREMENTS ACCEPTANCE TESTS, PART 2 (cont'd)								
Operation Time:	(Note 11)	4.0	t:	----	20	sec.	----	----
Low Pressure	Pressure=21±3	6.5	----	----	----	----	----	----
Voltage Breakdown:	mmHg; Voltage= 300 Vac							
Vibration (2):	F=40 cps; G=15; Rp= 10,000 ohms	2.5	Ep:	----	20	mVac	----	----
Vibration (3):	G=10; F=70-2000 cps; Rp=10,000 ohms; Positions X1 and X2 only	6.5	ep:	----	125 Peak to Peak	mv	----	----
DEGRADATION RATE ACCEPTANCE TESTS								
Subminiature Lead Fatigue:		2.5	----	4.0	----	arcs	----	----
Shock (1):	Ehk=+100 Vdc; Rg1= 0.1 Meg; Hammer Angle=30° (Note 3)	20	----	----	----	----	----	----
Fatigue (1):	96 hours; G=2.5; Fixed frequency; F=25 min., 60 max.; (Note 5)	6.5	----	----	----	----	----	----
Shock (2):	Ehk=100 Vdc; Rg1= 0.1 Meg; Hammer Angle =120°+ Rubber Pad; t=10 milliseconds; G= 75; (Note 16)	20	----	----	----	----	----	----
Fatigue (2):	6 hours; G=10; F= 130-2000-130 cps; (Note 15)	6.5	----	----	----	----	----	----
Post Shock tests (1) and (2) and Fatigue Tests (1) and (2) End Points:								
Vibration (2):	F=40 cps; G=15; Rp= 10,000 ohms	----	Ep:	----	80	mVac		
Heater-Cathode Leakage (1):	Ehk=+100 Vdc Ehk=-100 Vdc	----	lhk (1): lhk (1):	----	7 7	μAdc μAdc	----	----
Change in Transconductance (1) of individual tubes:	Ef=6.3 V	----	Δ _f Sm (1):	----	15	%	----	----
Grid Current (1):		----	lc (1):	----	-1.0	μAdc	----	----
Glass Strain (Thermal Shock):		6.5	----	----	----	----	----	----
ACCEPTANCE LIFE TESTS								
Heater Cycling Life Test:	Ef=7.0 V; Eb=Ec= 0 V; Ehk=140 Vac; 1 min. on, 4 min. off	1.0	----	2000	----	Cycles	----	----
Heater Cycling Life Test End Points:								
Heater-Cathode Leakage (1):	Ehk=+100 Vdc Ehk=-100 Vdc	----	lhk (1): lhk (1):	----	7 7	μAdc μAdc	----	----
2 & 20 Hour Stability Life Test:	TA=Room; Ehk= +200 Vdc; Rg/g= 1.0 Meg.	----	----	----	----	----	----	----
2 & 20 Hour Stability Life Test End Points:	(Typical Sample Size= 50 tubes)	----	----	----	----	----	----	----

INDUSTRIAL TUBE DIVISION

RAYTHEON MANUFACTURING COMPANY



RELIABLE SUBMINIATURE DOUBLE TRIODE

ELECTRICAL DATA (Cont'd)

CHARACTERISTICS AND QUALITY CONTROL TESTS (cont'd)

(In the following test, each unit is tested separately)

TEST	CONDITIONS	AQL	MIL - E - 1	MIN	MAX	MIL - E - 1	Allowable Defects per Characteristic	
							1st Sample	Combined Samples
ACCEPTANCE LIFE TESTS (cont'd)								
Change in Transconductance (1) of individual tubes:		1.0	$\Delta_{p}S_m(1)$:	----	10	%	----	----
100 Hour Survival Rate Life Test:	TA=Room; Ehk=+200 Vdc; Rg/g=1.0Meg.	----	----	----	----	----	----	----
100 Hour Survival Rate Life Test End Points:	(Typical Sample Size= 200 tubes)	----	----	----	----	----	----	----
Continuity and Shorts (Inoperatives):		0.65	----	----	----	----	----	----
Transconductance (1):		1.0	$S_m(1)$:	3750	----	μmhos	----	----
200 Hour Intermittent Life Test (1):	Eb=250 Vdc; Ec1=0 Vdc; Ehk=+200 Vdc; Rg/g=1.0 Meg.; Rk/k=2900 ohms; TA=Room							
200 Intermittent Life Test (1) End Points:	(Typical Sample Size= 20 tubes 1st sample; 40 tubes 2nd sample)							
Inoperatives:		----	----	----	----	-----	1	3
Grid Current (1):		----	Ic1:	----	-0.9	μAdc	1	3
Heater Current:		----	If:	276	328	mA	1	3
Change in Transconductance (1) of Individual Tubes:		----	$\Delta_{p}S_m(1)$:	----	25	%	1	3
Transconductance (2):	(Note 9)	----	$\Delta_{E_f}S_m(2)$:	----	20	%	1	3
Heater - Cathode Leakage (1):	Ehk=+100 Vdc Ehk=-100 Vdc	----	Ihk(1): Ihk(1):	----	10 10	μAdc μAdc	1	3
Insulation of Electrodes:								
g-all		----	Rg-all:	100	----	Meg. }	1	3
p-all		----	Rp-all:	100	----	Meg. }		
Total Defectives:		----	----	----	----	----	3	6
500 Hour Intermittent Pulse Life Test:	Eb=250 Vdc; Ec1= -25 Vdc; Rk/k=0; Rl/p=330 ohms; tp= 10 μsec ; duty cycle= 1.0%; egk=+30 $\pm$ 1 volts; TA=Room							
500 Hour Intermittent Pulse Life Test End Points:	(Typical Sample Size= 20 tubes 1st sample; 40 tubes 2nd sample)							
Inoperatives:		----	----	----	----	----	1	3
Pulse Emission:		----	ik:	300	----	mA	1	3
Change in Pulse Emission of Individual Tubes from Initial:		----	Δ_{ik} : Δ_{ik} :	----	-35 +50	% % }	1	3
Total Defectives:		----	----	----	----	----	2	5
Intermittent High Temperature Life Test (2):	T Bulb=220°C; Ehk= +200 Vdc; Rg/g=1.0Meg.	----	----	----	----	----	----	----
500 Hour Intermittent High Temperature Life Test (2) End Points:	(Typical Sample Size= 20 tubes 1st sample; 40 tubes 2nd sample)	----	----	----	----	----	----	----
Inoperatives:		----	----	----	----	----	1	3
Grid Current (1):		----	Ic(1):	----	-0.7	μAdc	1	3

INDUSTRIAL TUBE DIVISION

RAYTHEON MANUFACTURING COMPANY



RELIABLE SUBMINIATURE DOUBLE TRIODE

ELECTRICAL DATA (Cont'd)

CHARACTERISTICS AND QUALITY CONTROL TESTS (cont'd)

(In the following test, each unit is tested separately)

TEST	CONDITIONS	AQL %	MIL - E - 1 SYMBOL	MIN	MAX	MIL - E - 1 UNITS	Allowable Defects per Characteristic 1st Sample	Combined Samples
ACCEPTANCE LIFE TESTS (cont'd)								
Heater Current:		----	If:	276	328	mA	1	3
Transconductance (1) Change in Individual Tubes from Initial:		----	$\Delta_{tSm}(1)$:	----	20	%	1	3
Transconductance (2):	(Note 9)	----	$\Delta_{EfSm}(2)$:	----	15	%	1	3
Heater - Cathode Leakage (1):	Ehk = +100 Vdc Ehk = -100 Vdc	----	lhk (1): lhk (1):	----	10 10	μAdc μAdc	1	3
Insulation of Electrodes:		---						
g - all:		----	Rg - all:	50	----	Meg.	1	3
p - all:		----	Rp - all:	50	----	Meg.		
Transconductance (1) Average Change:		----	Avg. Δ_{tSm} :	----	15	%	----	----
Total Defectives:		----	----	----	----	----	3	6
1000 Hour High Temperature Life Test End Points:	(Typical Sample Size = 20 tubes 1st sample; 40 tubes 2nd sample.)							
Inoperatives:		----	----	----	----	----	1	3
Grid Current (1):		----	Ic (1):	----	-1.0	μAdc	1	3
Heater Current:		----	If:	276	328	mA	1	3
Transconductance (1) Change of Individual Tubes from Initial:		----	$\Delta_{tSm}(1)$:	----	25	%	1	3
Transconductance (2):	(Note 9)	----	$\Delta_{EfSm}(2)$:	----	20	%	1	3
Heater - Cathode Leakage (1):	Ehk = +100 Vdc Ehk = -100 Vdc	----	lhk (1): lhk (1):	----	10 10	μAdc μAdc	1	3
Insulation of Electrodes:								
g - all:		----	Rg - all:	25	----	Meg.	2	5
p - all:		----	Rp - all:	25	----	Meg.		
Total Defectives:		----	----	----	----	----	4	8

NOTES

- Note 1: Characteristics, Quality Control Test Procedures, and Inspection Levels are made according to the appropriate paragraphs of MIL-E-1, "Inspection Instructions for Electron Tubes," and MIL-STD-105A.
- Note 2: Without shield.
- Note 3: Test conditions and acceptance criteria per Shock Test procedures of MIL-E-1 basic specifications.
- Note 4: Centrifuge Test with forces applied in any direction.
- Note 5: Test conditions and acceptance criteria per Fatigue Test procedures of MIL-E-1 basic specifications.
- Note 6: These normal values represent conditions at which control of reliability may be expected.
- Note 7: These normal test conditions are used for all characteristic tests unless otherwise stated under the individual test item.
- Note 8: For most applications the performance will not be adversely affected by $\pm 5\%$ heater voltage variation, but when the application can provide a closer control of heater voltage, an improvement in reliability will be realized.
- Note 9: Change of transconductance for individual tubes from that value measured at $E_f=6.3\text{V}$ to that value measured at $E_f=5.7\text{V}$.

INDUSTRIAL TUBE DIVISION

RAYTHEON MANUFACTURING COMPANY



RELIABLE SUBMINIATURE DOUBLE TRIODE

ELECTRICAL DATA (Cont'd)

NOTES (Cont'd)

- Note 10: In addition to meeting the tightened electrical, physical and mechanical tests described in this data sheet, these Raytheon Reliable tubes are now guaranteed to be free from "Potential" defects identifiable by microscopic inspection as described by appendix B of MIL-E-1 basic specifications.
- Note 11: Operation time is the time in seconds required for the plate current to attain a value within $\pm 10\%$ of the three (3) minute plate current (1) value measured at plate current (1) test conditions. No preheating before this test is allowed. A cold tube must be used.
- Note 12: During both continuity and short testing, the tube under test shall be tapped at least three times in each of two planes 90° apart with a tapper which shall be adjusted to give an impulse of approximately one half sine wave of 300 ± 50 microseconds duration and having a minimum average amplitude of 80 G's peak acceleration as measured with a Gulton A-305 accelerometer and KA-1 kit. The shorts detecting equipment shall be a device capable of detecting as shorts, the following interelement resistances of the given time duration.

Duration	Sensitivity
Permanent	600,000 ohms
500 micro seconds	500,000 ohms
100 micro seconds	100,000 ohms
60 micro seconds	1,000 ohms

Tubes which give an indication of one or more of the following shall be rejected as inoperable:

- a. either a permanent or tap short at any time during the tapping procedure
- b. any open circuit
- c. air leaks

Note 13: Peak cathode current shall be measured by means of a high impedance oscilloscope or equipment device connected across a $1.0 \pm 1\%$ cathode resistor. The specified limit refers to the maximums of the pulse amplitude. The variation of the output pulse amplitude between 20% tp and 80% tp shall not exceed the specified limit.

Note 14: Heater-Cathode Leakage (2) is performed as follows:

- a. preheat tubes for 10 seconds with $E_f = 10.5V$
- b. test immediately by the applications of the specified test conditions of this test
- c. after 16 seconds read heater-cathode leakage of each section.

Note 15: The tubes shall be rigidly mounted on a table vibrating with simple harmonic motion. The tubes shall be vibrated for a total of 6 hours, 2 hours in each of three positions, X1, X2, and Y1. Only rated heater voltage shall be applied. Tubes which show one or more of the following defects shall be considered failures.

- a. tubes which show permanent or tap shorts or open circuits following fatigue test, when tested as specified in 4.7.2 and 4.7.3
- b. tubes which do not comply with past fatigue limits, this is a destructive test

Note 16: The provisions of paragraph 4.9.20.5 of Specification MIL-E-1 shall apply, except for test conditions listed for shock test (2).


INDUSTRIAL TUBE DIVISION

RAYTHEON MANUFACTURING COMPANY

55 CHAPEL ST., NEWTON 58, MASS.



RELIABLE SUBMINIATURE DOUBLE TRIODE

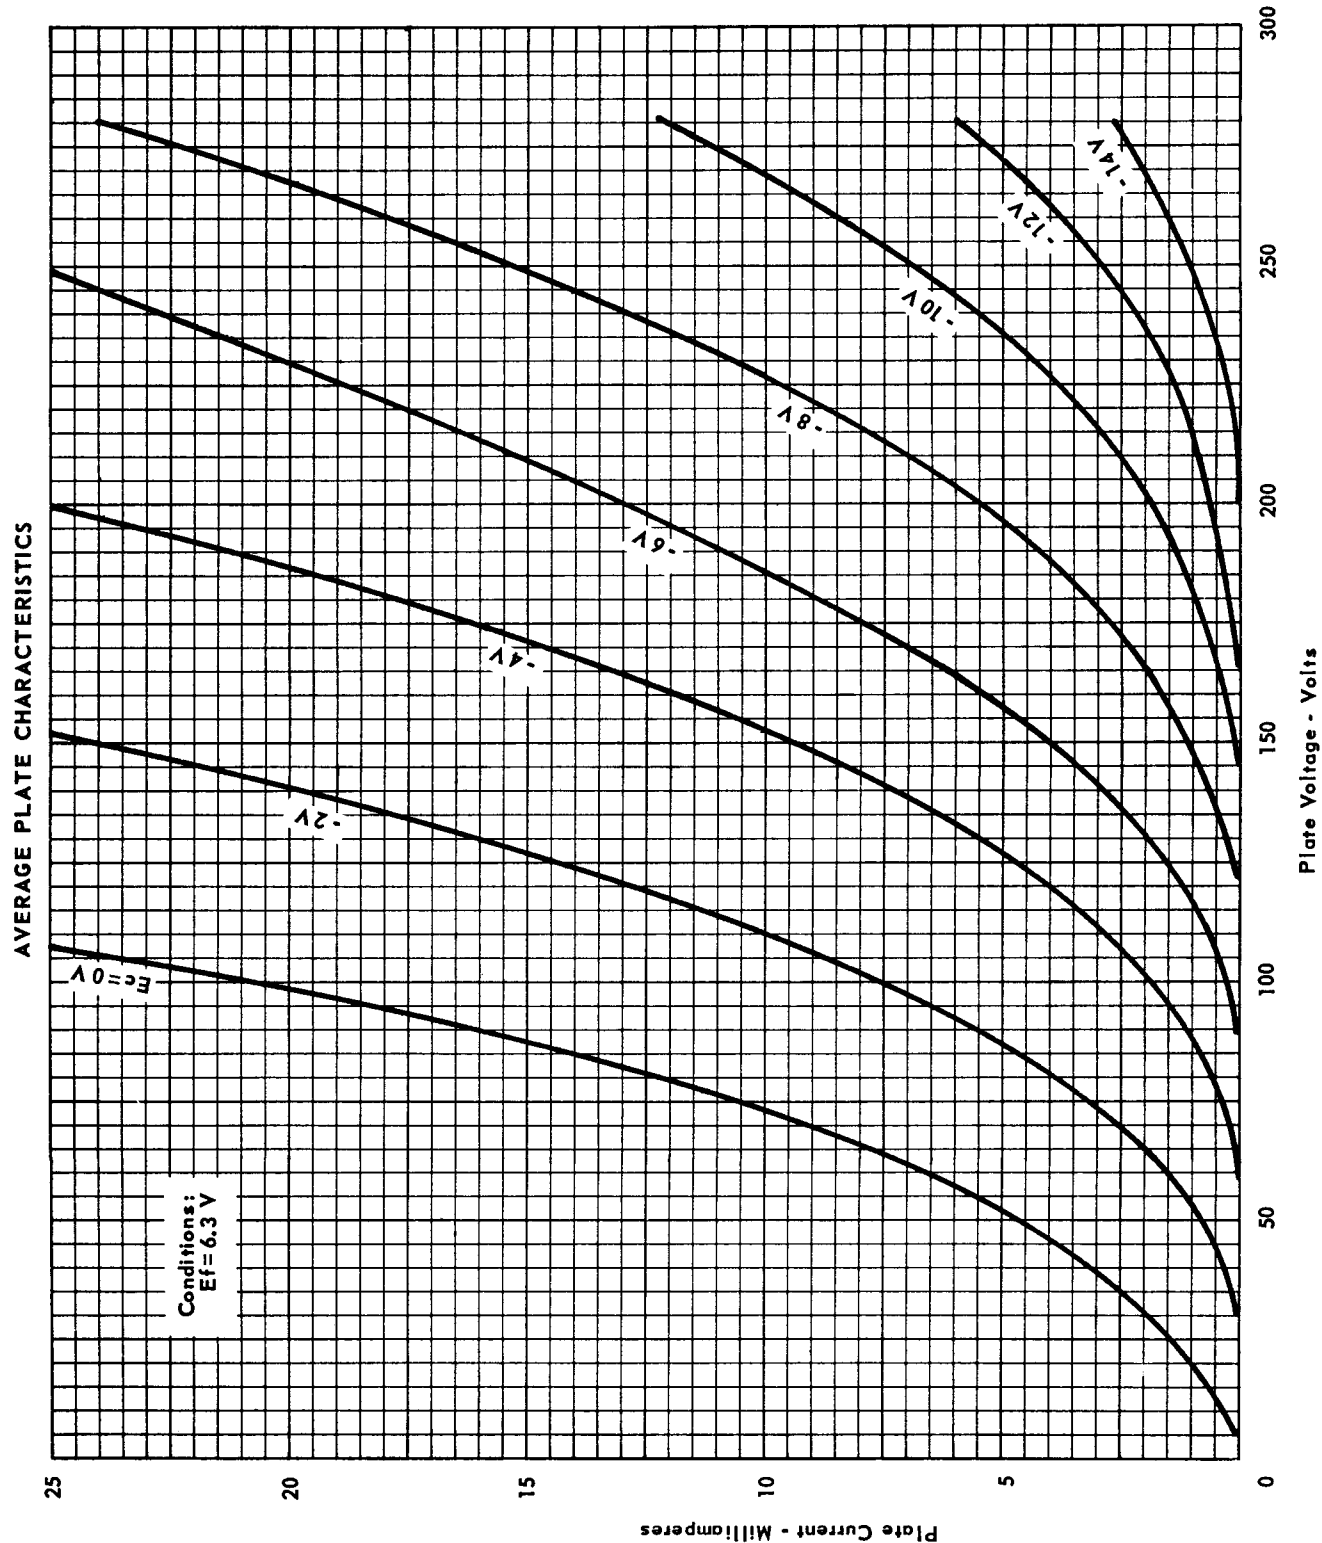

INDUSTRIAL TUBE DIVISION


RAYTHEON MANUFACTURING COMPANY

55 CHAPEL ST., NEWTON 58, MASS.



RELIABLE SUBMINIATURE DOUBLE TRIODE

AVERAGE CHARACTERISTICS

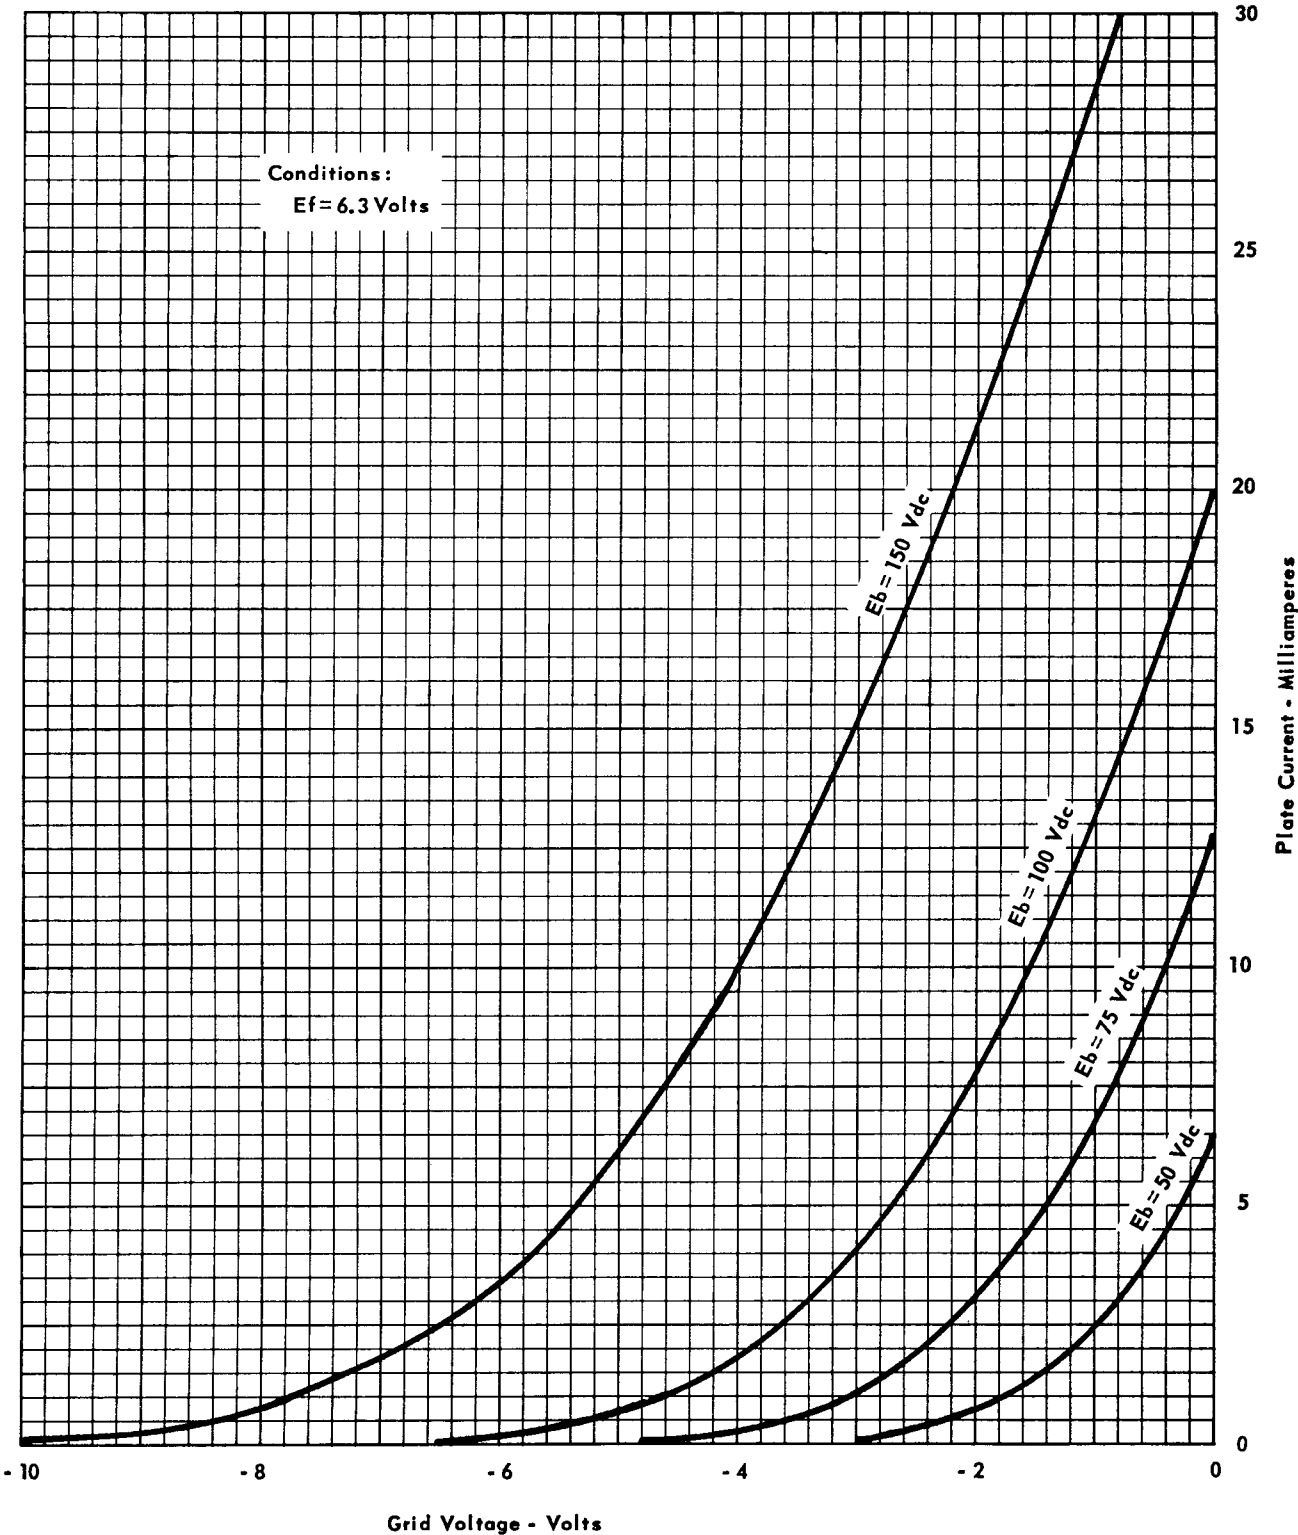


INDUSTRIAL TUBE DIVISION

RAYTHEON MANUFACTURING COMPANY

55 CHAPEL ST., NEWTON 58, MASS.



RELIABLE SUBMINIATURE DOUBLE TRIODE

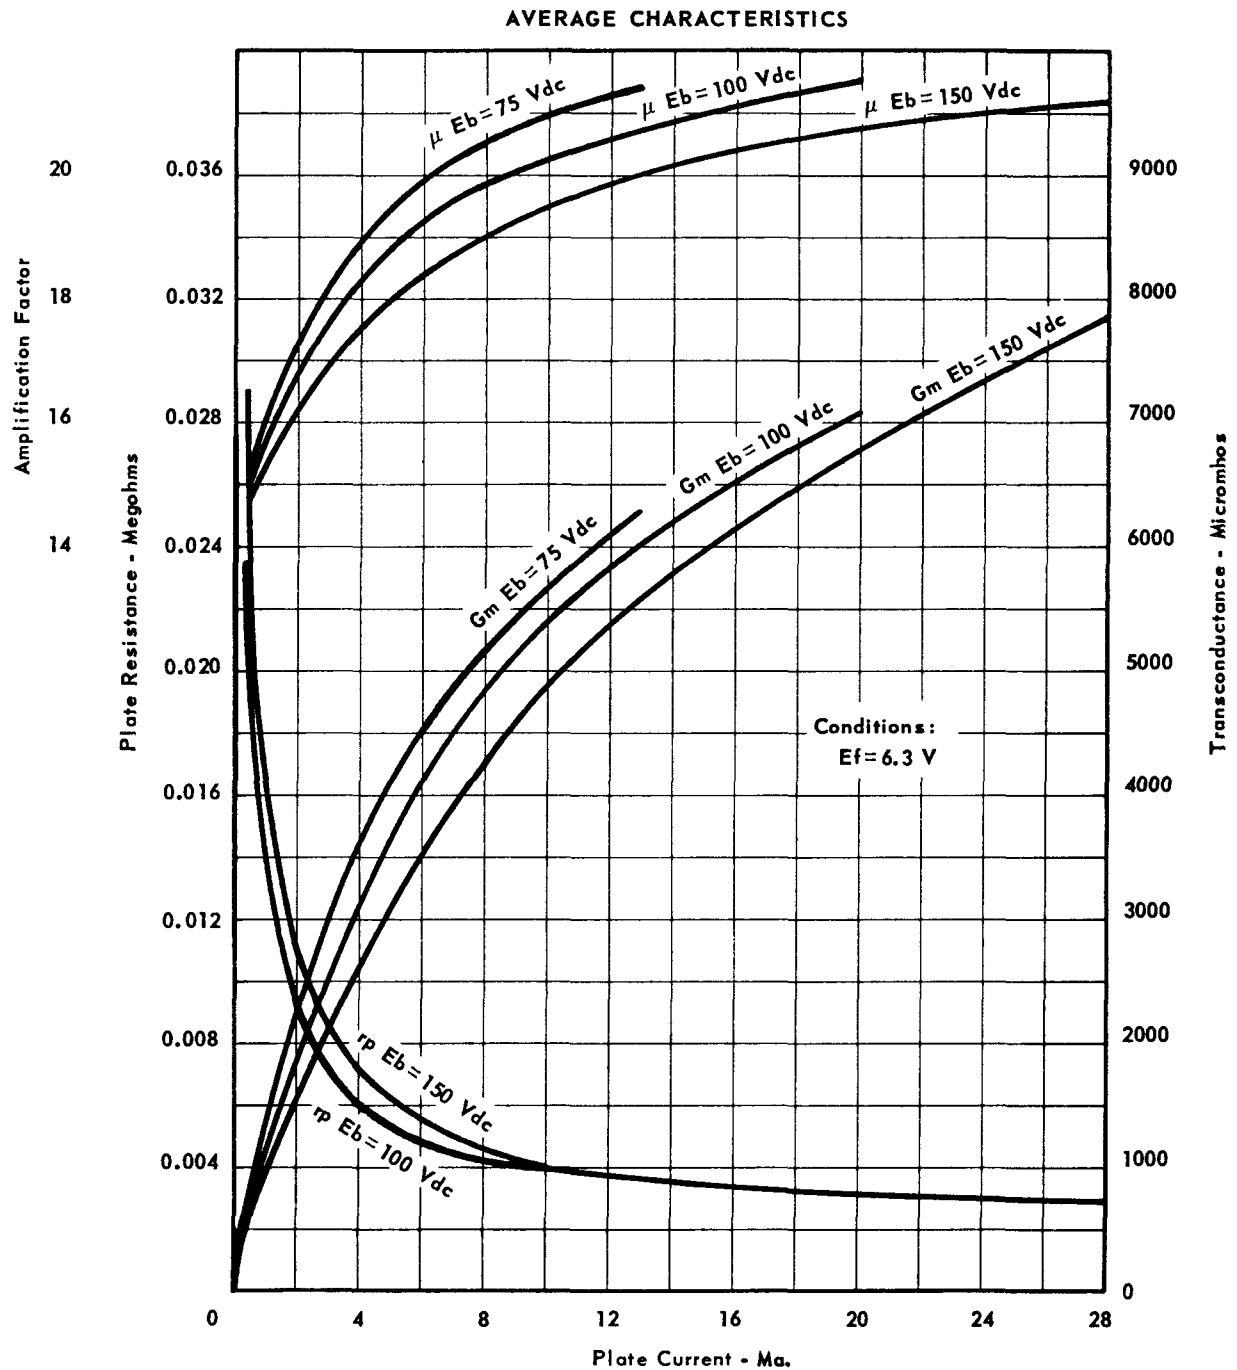

INDUSTRIAL TUBE DIVISION

RAYTHEON MANUFACTURING COMPANY

55 CHAPEL ST., NEWTON 58, MASS.