



6211

6211

MEDIUM-MU TWIN TRIODE

9-PIN MINIATURE TYPE

For "on-off" control applications involving
long periods of operation under cutoff conditions

GENERAL DATA**Electrical:**

Heater, Pure Tungsten, for Unipotential Cathodes:

	Series	Parallel	
Voltage.	12.6 $\pm$ 5%	6.3 $\pm$ 5%	ac or dc volts
Current.	0.15	0.3	amp

Direct Interelectrode Capacitances:^o

	Unit No.1	Unit No.2	
Grid to plate.	2.22	2.22	$\mu\mu\text{f}$
Grid to cathode and heater .	2.90	2.90	$\mu\mu\text{f}$
Plate to cathode and heater .	0.54	0.46	$\mu\mu\text{f}$
Heater to cathode.	3.25	3.25	$\mu\mu\text{f}$
Plate of unit No.1 to plate of unit No.2		0.56	$\mu\mu\text{f}$
Grid of unit No.1 to grid of unit No.2.		0.06 max.	$\mu\mu\text{f}$

Characteristics, Class A₁ Amplifier (Each Unit):

Plate-Supply Voltage	100	volts
Cathode Resistor	470	ohms
Amplification Factor	27	
Plate Resistance (Approx.)	7500	ohms
Transconductance	3600	μmhos
Plate Current.	4.6	ma
Grid Voltage (Approx.) for plate voltage of 150 volts and plate current of 100 μamp .	-8	volts

Mechanical:

Mounting Position.	Vertical, base up or down, or Horizontal with pins 1 and 5 in vertical plane	
Maximum Overall Length	2-3/16"	
Maximum Seated Length.	1-5/16"	
Length, Base Seat to Bulb Top (Excluding tip) .	1-9/16" $\pm$ 3/32"	
Maximum Diameter	7/8"	
Dimensional Outline.	See General Section	
Bulb	T-6-1/2	
Base	Small-Button Noval 9-Pin (JETEC No.E9-1)	
Basing Designation for BOTTOM VIEW	9A	
Pin 1 - Plate of Unit No.2	Pin 6 - Plate of Unit No.1	
Pin 2 - Grid Unit No.2	Pin 7 - Grid of Unit No.1	
Pin 3 - Cathode of Unit No.2	Pin 8 - Cathode of Unit No.1	
Pins 4 & 9 - Heater of Unit No.2	Pin 9 - Heater Mid-Tap	
Pins 5 & 9 - Heater of Unit No.1		

^o Without external shield.

← Indicates a change.



6211

MEDIUM-MU TWIN TRIODE

FREQUENCY DIVIDER IN COMPUTER SERVICE and "ON-OFF" CONTROL SERVICE

Values are for Each Unit

Maximum Ratings, Absolute Values:

PLATE VOLTAGE	200 max.	volts
GRID VOLTAGE:		
Negative bias value	100 max.	volts
Positive bias value	1 max.	volt
→ DC POSITIVE GRID CURRENT	2 max.	ma
→ DC CATHODE CURRENT	16 max.	ma
→ PLATE DISSIPATION	1 max.	watt
→ PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode .	180 max.	volts
Heater positive with respect to cathode .	180 [▲] max.	volts
BULB TEMPERATURE (At hottest point on bulb surface)	120 max.	°C

Maximum Circuit Values:

Grid-Circuit Resistance:		
For fixed-bias operation	0.1 max.	megohm
For cathode-bias operation	0.5 max.	megohm

CHARACTERISTICS RANGE VALUES FOR EQUIPMENT DESIGN

	Note	Min.	Max.	
Heater Current	1	0.138	0.162	amp
Plate Current (Each unit) . . .	1,2	4.8	5.5	ma
Plate Current (Each unit) . . .	1,3	3.6	5.6	ma
Plate Current (Each unit) . . .	1,2,4	-	100	μamp
Transconductance	1,2,3	2700	4500	μmhos
Reverse Grid Current (Units in parallel)	1,5	-	1	μamp
Leakage Resistance (Each unit):				
Between grid and all other electrodes	1,6	100	-	megohms
Between plate and all other electrodes	1,7	100	-	megohms
Heater-Cathode				
Leakage Current:				
Heater negative with respect to cathode	1,8	-	20	μamp
Heater positive with respect to cathode	1,8	-	20	μamp
Difference in Grid Voltage				
Between Units	1,2,9	-	1	volt
Contact Potential	1,10	-	1	volt
Amplification Factor				
(Each unit)	1,2	23	31	

Note 1: With 12.6 volts ac or dc on heater (series arrangement).

▲ The dc component must not exceed 90 volts.

→ Indicates a change.



6211

6211

MEDIUM-MU TWIN TRIODE

- Note 2: With plate-supply volts = 150, plate-circuit resistance (ohms) = 20,000, and grid-circuit resistance (ohms) = 47,000. Each unit tested separately. Unit not under test connected to ground.
- Note 3: With plate-supply volts = 100, cathode resistor (ohms) = 470, and cathode bypass capacitor of 1000 μ f. Each unit tested separately. Unit not under test connected to ground.
- Note 4: With grid volts = -10.
- Note 5: With plate-supply volts = 150, cathode resistor (ohms) = 470, and grid-circuit resistance (megohm) = 0.5.
- Note 6: With grid 100 volts negative with respect to all other electrodes tied together.
- Note 7: With plate 300 volts negative with respect to all other electrodes tied together.
- Note 8: With 100 volts dc between heater and cathode and units connected in parallel.
- Note 9: With grid voltage adjusted for plate current of 100 μ amp.
- Note 10: With plate volts = 100, grid current (μ amp) = 0.1, and grid-circuit resistance (megohm) = 0.1. Each unit tested separately. Unit not under test connected to ground.

SPECIAL RATINGS & PERFORMANCE DATA

Heater-Cycling Life Performance:

Cycles of Intermittent Operation. 2000 min. cycles
For conditions: Series heater arrangement, heater volts = 17, cycled 1 minute on and 4 minutes off, heater positive with respect to cathode by +100 volts dc, plate volts = 0, and grid volts = 0.

← Indicates a change.

6211



6211

AVERAGE CHARACTERISTICS FOR EACH UNIT

$E_f = 12.6$ VOLTS

SERIES HEATER ARRANGEMENT

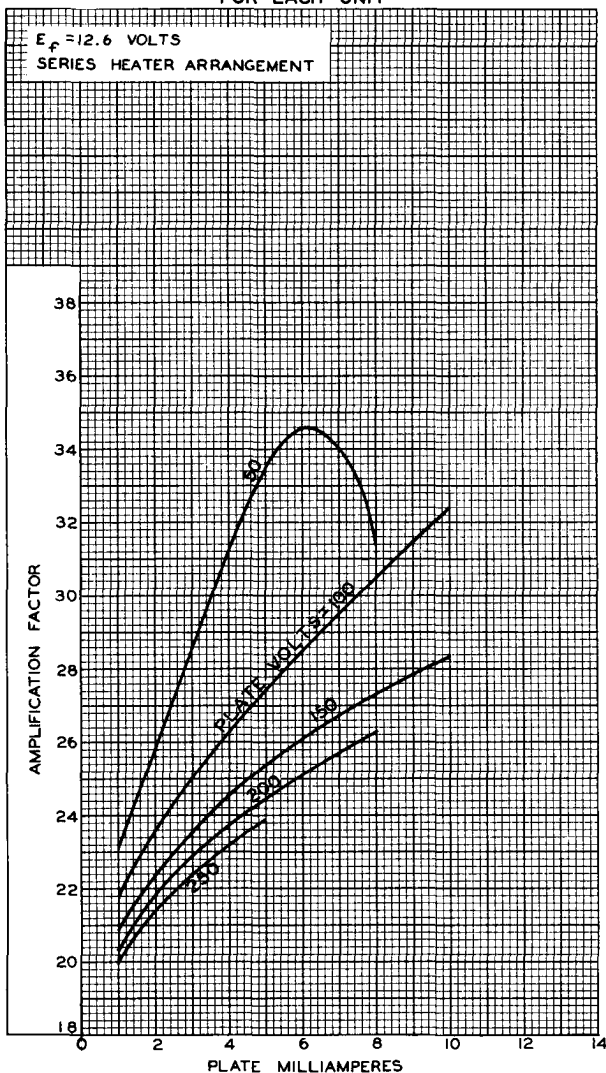


PLATE MILLIAMPERES

TUBE DIVISION

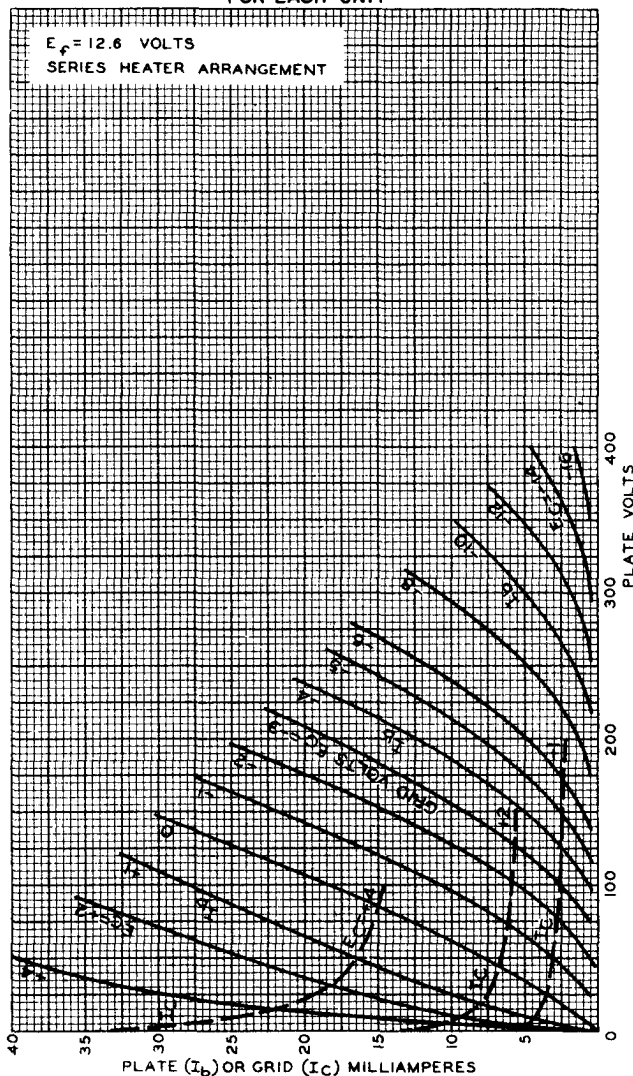
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-7824R1



6211

6211

AVERAGE PLATE CHARACTERISTICS
FOR EACH UNIT $E_f = 12.6$ VOLTS
SERIES HEATER ARRANGEMENT

JULY 9, 1952

TUBE DEPARTMENT

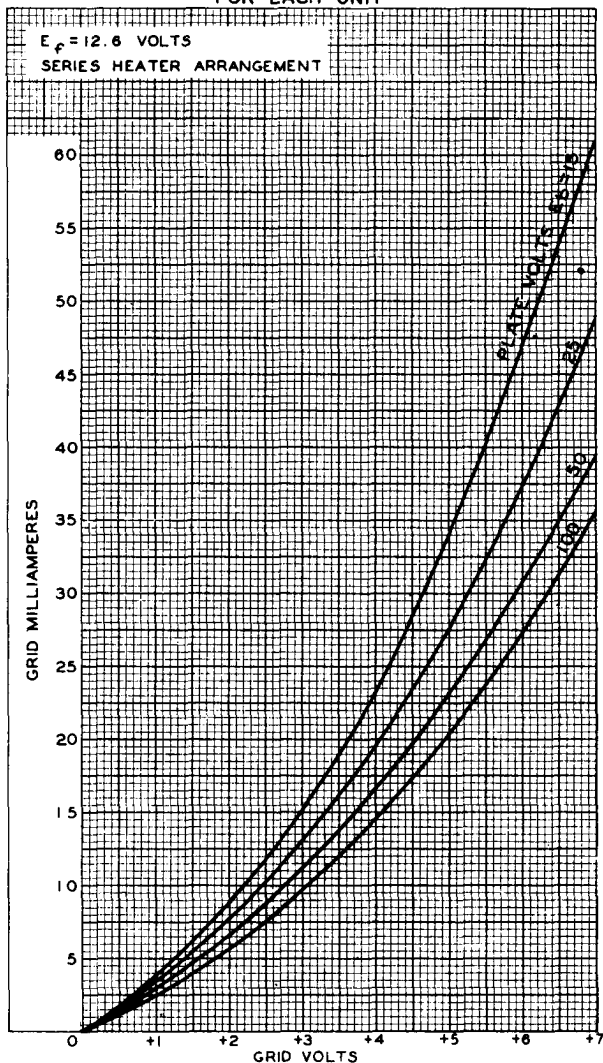
92CM-7822

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

6211



6211

AVERAGE CHARACTERISTICS
FOR EACH UNIT

JAN. 6, 1953

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-7623R1