

EDISWAN

68532

FULL WAVE GAS DISCHARGE RECTIFIER

(Previously U235)

REPLACEMENT TYPE

68532

GENERAL

Type 68532 is a full wave gas discharge rectifier suitable for use in low voltage charging circuits. ←

RATING

Filament Voltage (volts)	V_f	2.0
Filament Current (amps)	I_f	3.5
D.C. Output	20 volts	2 amps

DIMENSIONS

Maximum Overall Length (including Pins) (mm)	110
Maximum Diameter (mm)	45
Approximate Nett Weight (ozs)	$1\frac{1}{2}$
Approximate Home Packed Weight (ozs)	$2\frac{1}{2}$
Approximate Export Packed Weight (ozs)	4

MOUNTING POSITION—Vertical

July, 1957

Industrial
VALVE & CRT DIVISION

Issue 2/6

SIEMENS EDISON SWAN LIMITED

Indicates a change ←

68532

EDISWAN


68532




FULL WAVE GAS DISCHARGE RECTIFIER
(Previously U235)



REPLACEMENT TYPE

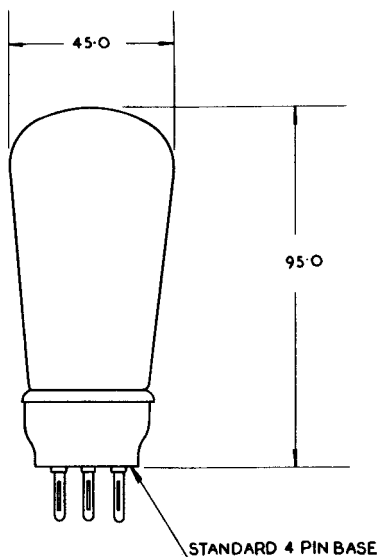

FILAMENT



ALL DIMS IN m.m. ←

Indicates a change ←

July, 1957

Industrial
VALVE & CRT DIVISION

Issue 2/6

SIEMENS EDISON SWAN LIMITED