

GL-6856 - GL-6857

THYRATONS

TRIODE TYPE

QUICK-HEATING CATHODE

NEGATIVE CONTROL CHARACTERISTICS

INERT-GAS AND MERCURY-VAPOR TYPE

DESCRIPTION AND RATING

These tubes are three-electrode inert-gas and mercury-vapor thyratons with negative control characteristics for use in all control applications. They combine the desirable temperature characteristic of gas tubes, maximum ratings over a wide temperature range, with the long life of mercury tubes. Another feature useful in industrial applications is a quick-heating filamentary-type cathode - only 30 seconds is required for the cathode to reach operating temperature.

The tubes are alike except for the type base used. The GL-6856 has a four-pin base for conventional socket mounting; the GL-6857 has a bracket-type base for panel mounting.

TECHNICAL INFORMATION

GENERAL

Electrical

Cathode - Filamentary

Filament Voltage.	2.5	Volts
Filament Current at 2.5 Volts	16 $\pm$ 2	Amperes
Heating Time.	30	Seconds

Anode to Control-Grid Capacitance	3	uuf
---	---	-----

Deionization Time, approximate.	1000	Microseconds
Ionization Time, approximate.	10	Microseconds
Anode Voltage Drop.	12	Volts
Critical Grid Current	10	Microamperes

Control Characteristics

Anode Voltage	100	500	1250		Volts
Grid Voltage	-1.0	-3.0	-5.2		Volts

Mechanical

Mounting Position - Vertical, Base Down


Equilibrium Condensed-Mercury Temperature

Rise Above Ambient	25	
Net Weight, maximum	7	Ounces

MAXIMUM RATINGS, Absolute Values

Maximum Peak Anode Voltage			
Inverse	1500	1500	Volts
Forward	1500	1500	Volts
Maximum Cathode Current			
Peak.	30	50	Amperes
Average	4.0	2.5	Amperes
Maximum Averaging Time.	5.0	5.0	Seconds
Fault	400	400	Amperes
Maximum Duration.	0.1	0.1	Seconds
Maximum Negative Control-Grid Voltage			
Before Conduction		500	Volts
During Conduction		10	Volts
Condensed-Mercury Temperature Limits.	-40 to +80		C

OUTLINE - GL-6856

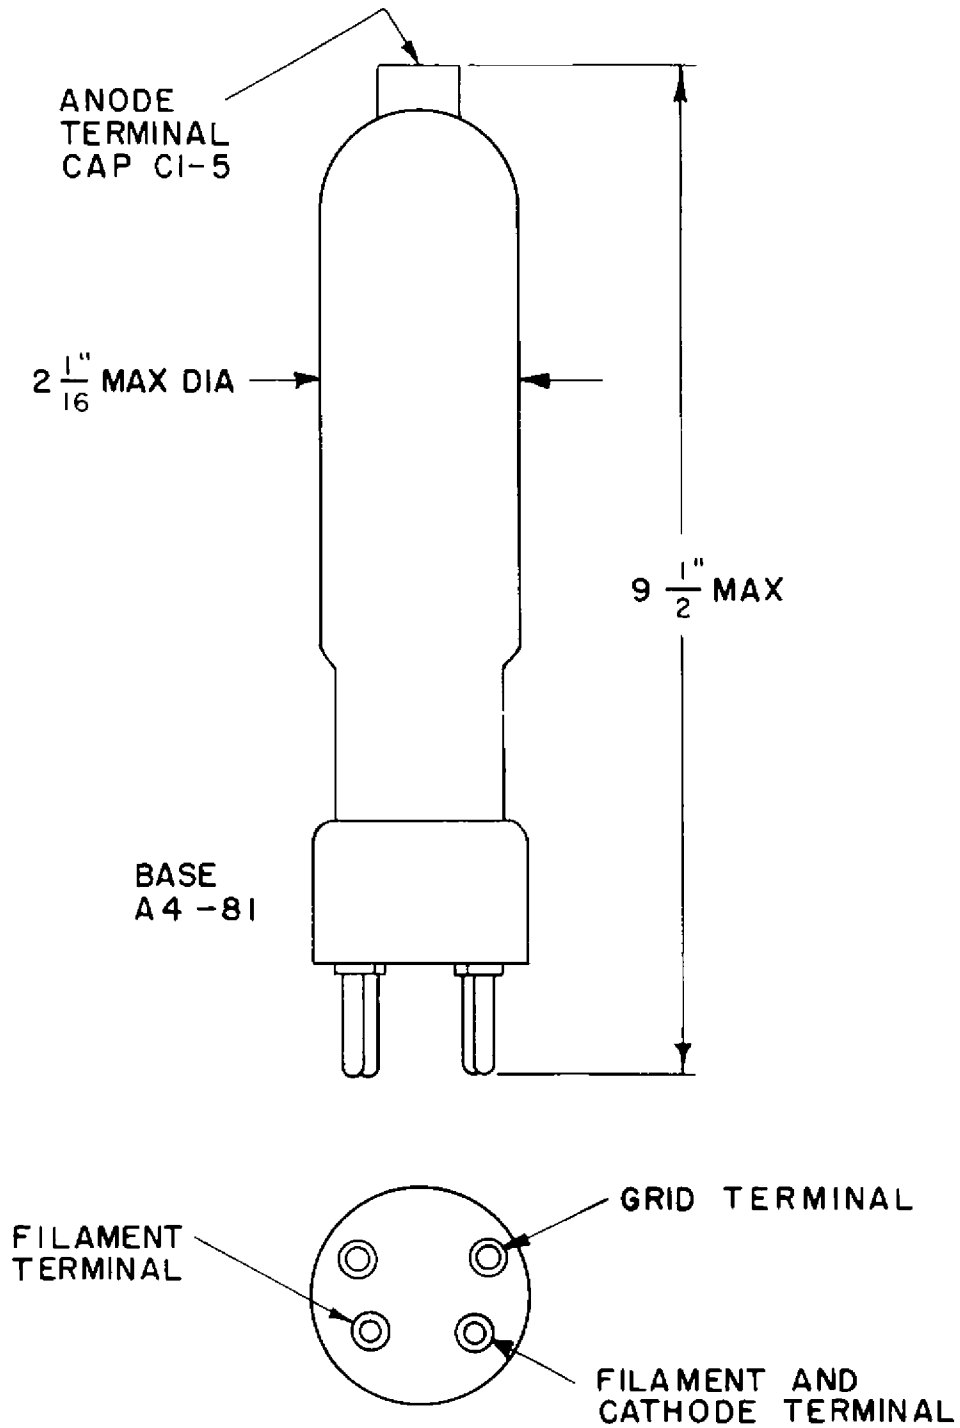

OUTLINE-GL-6857

